



APARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET
SENDER FREQUENCY: 0.05 CPS.
CONTOUR INTERVAL LOGARITHMIC

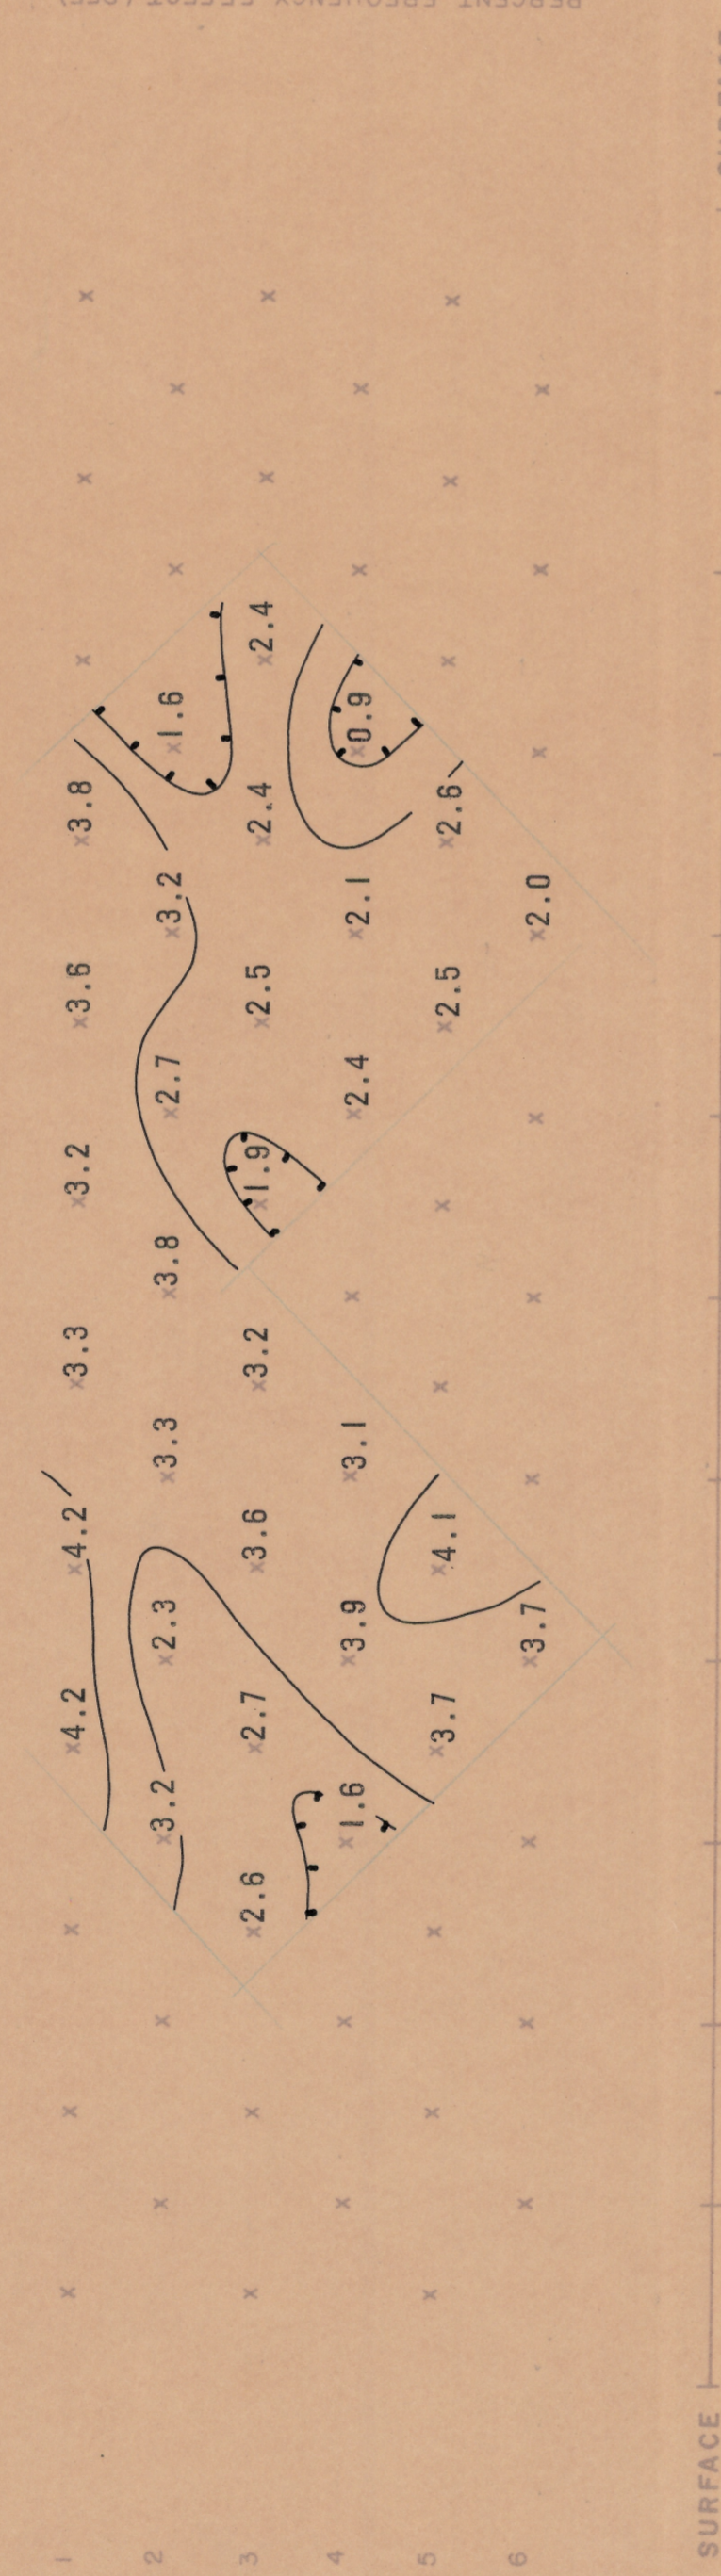


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 CPS

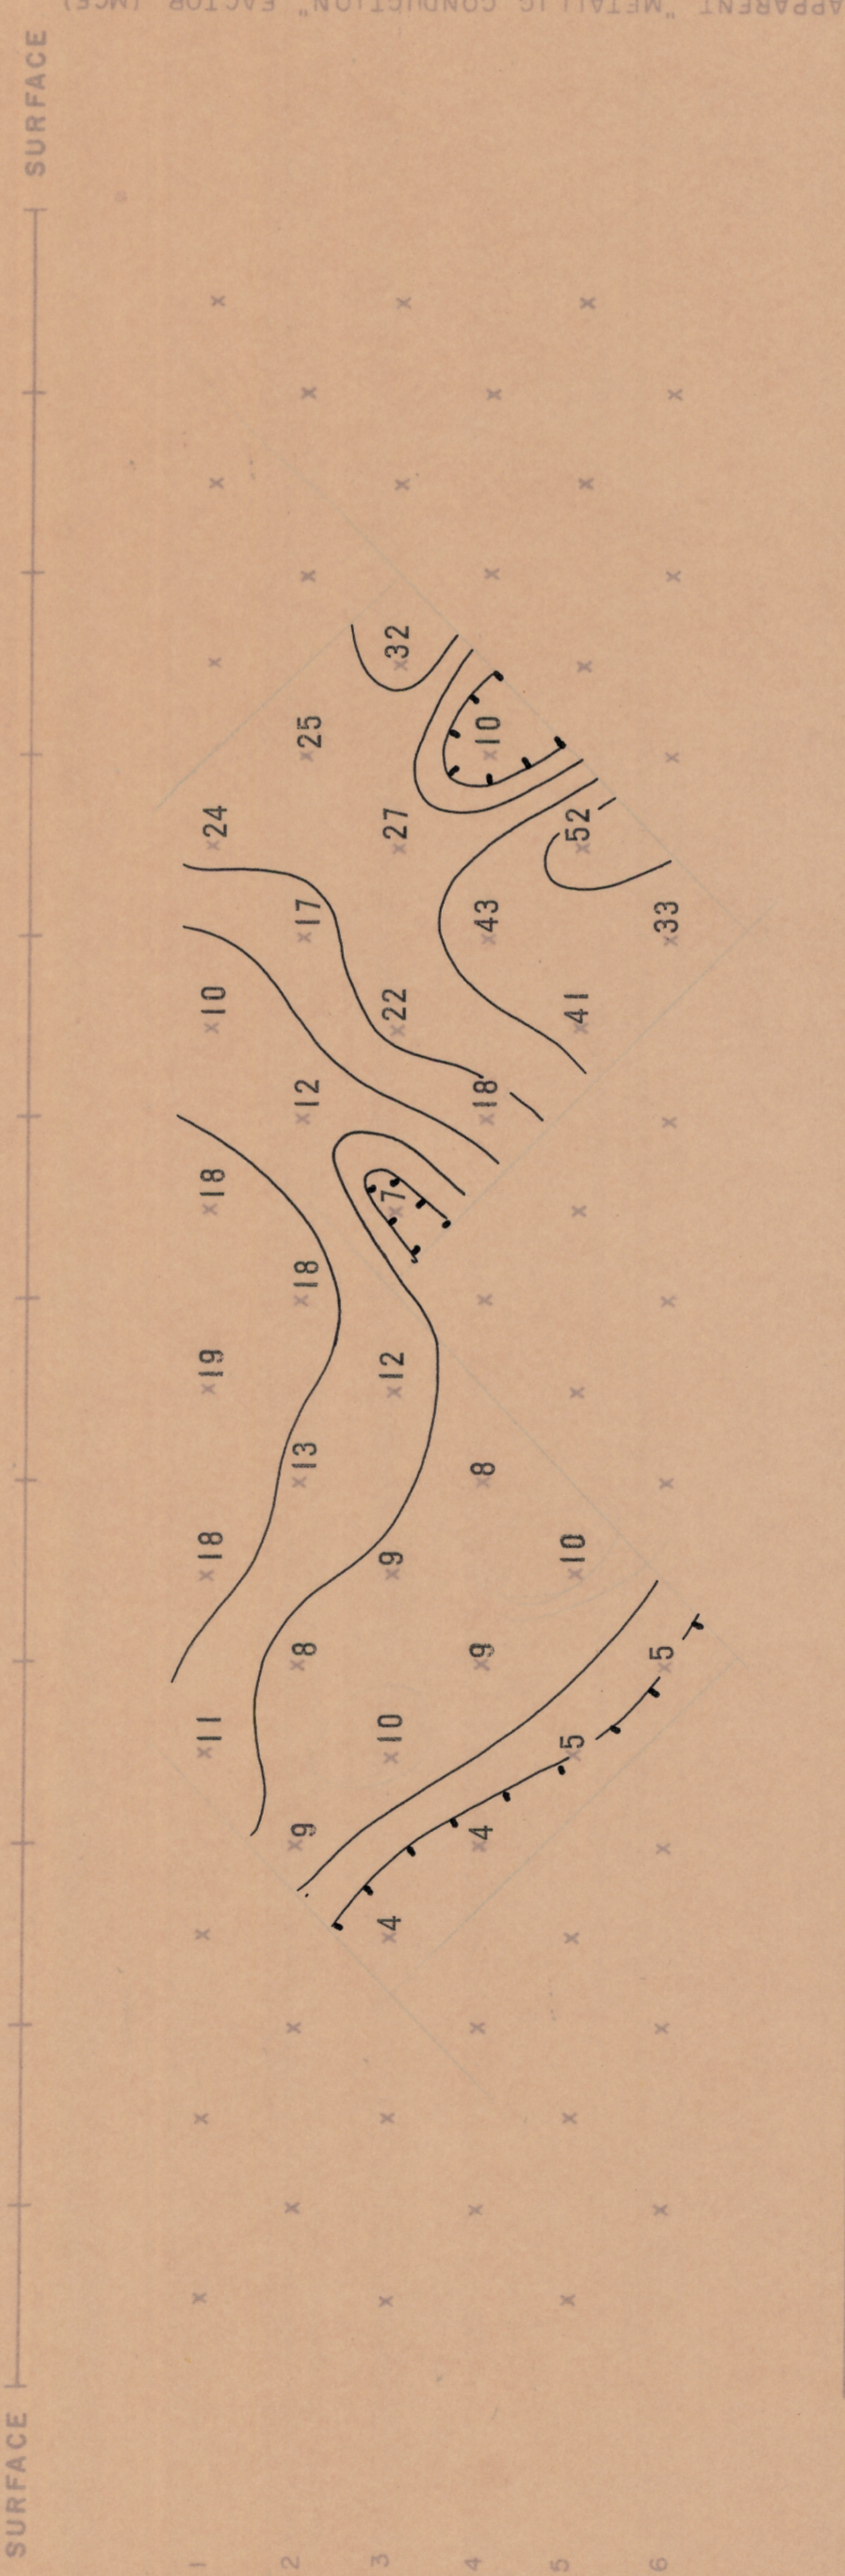

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $MCF = \frac{PFE \times 1000}{PDC}$
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

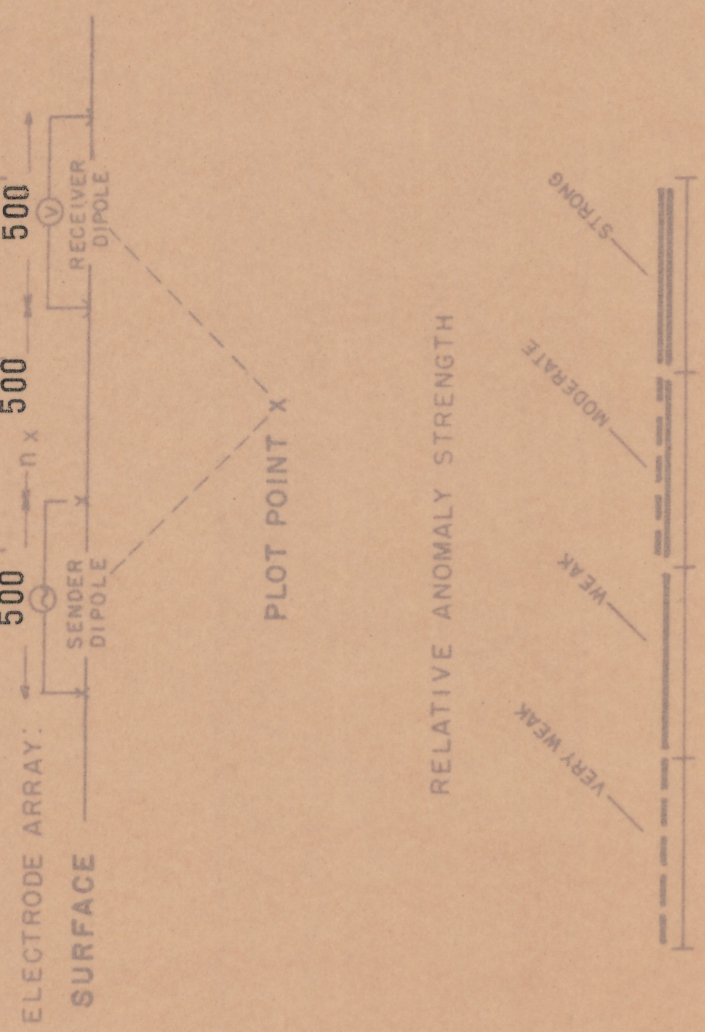

LOOKING N 35° W




HACKBERRY AREA

SECTIONAL DATA SHEET
LINE NO. 2 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: SEP 1968

FOR
GUNNEX LIMITED

SELF POTENTIAL

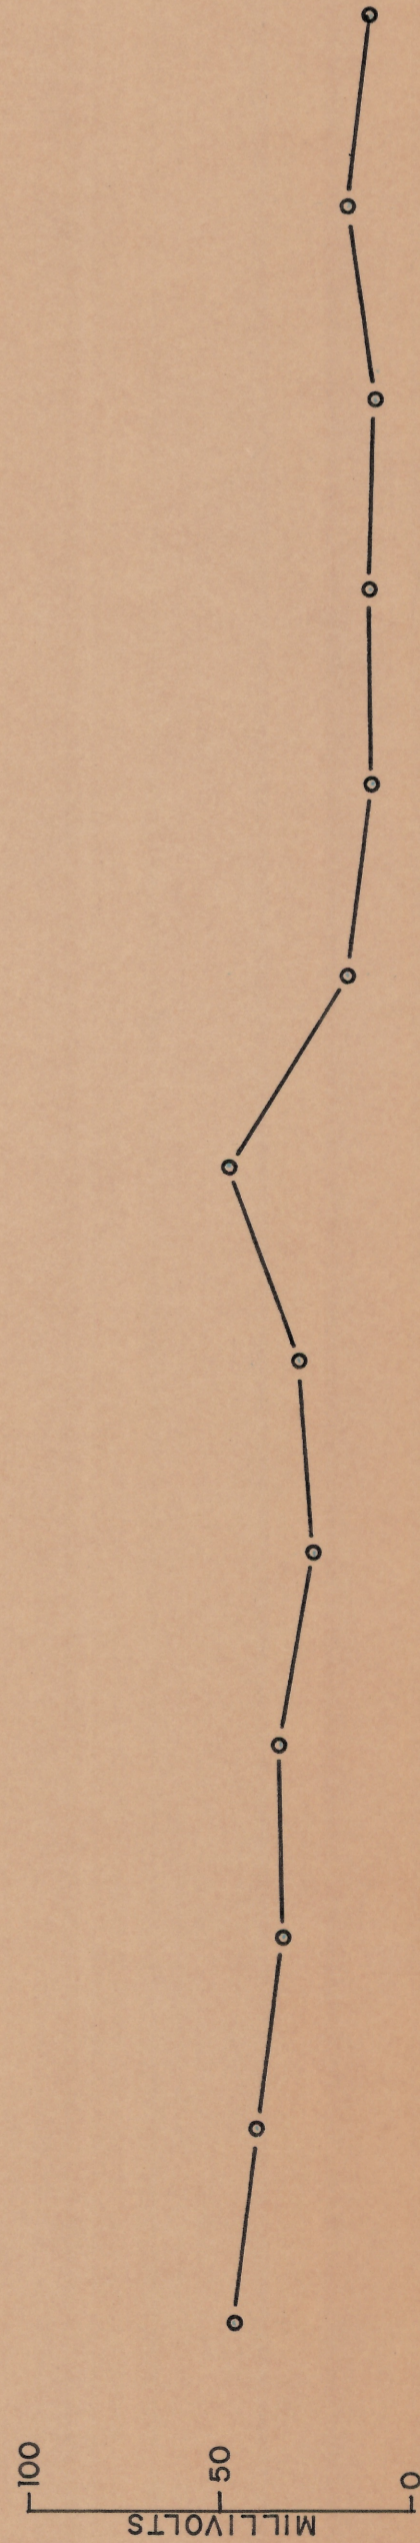

SPREAD 1
LINE NO. 2
DATE: SEP 1968