



ELECTRODES SURFACE
STATIONS SURFACE
60S 60N

SPREAD 1
0-S/N 2 3 4 5 10 20 30 40 50 60N SURFACE


EXPLANATION

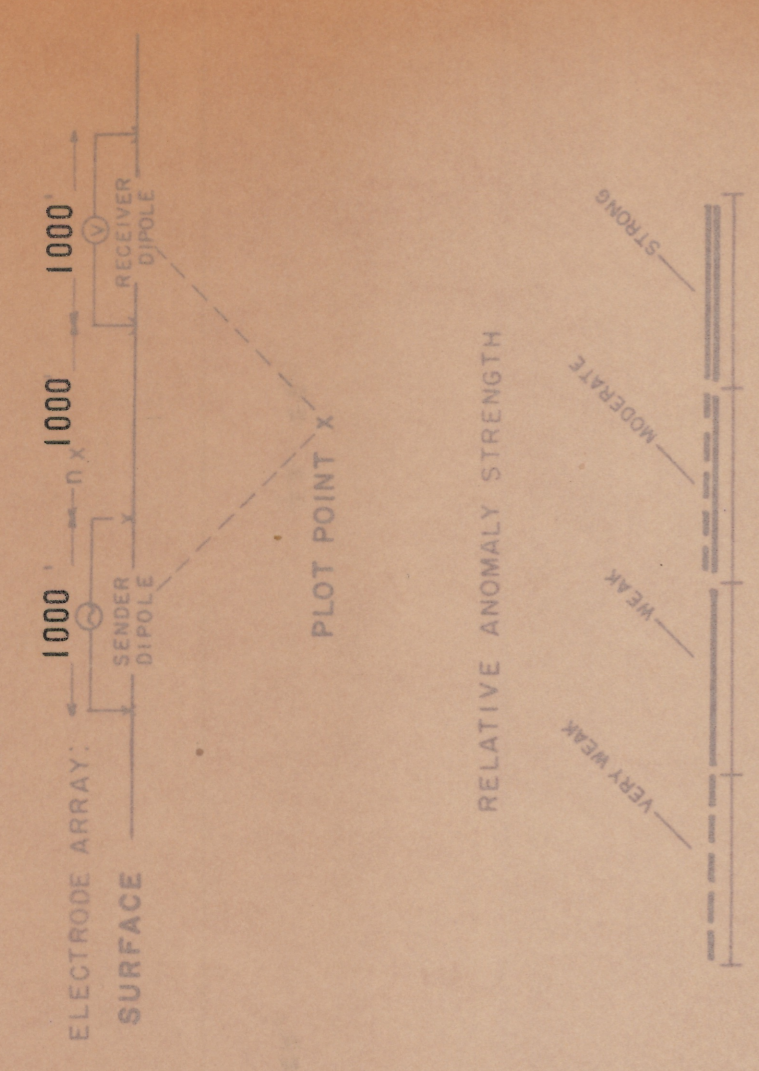



APPARANT RESISTIVITY (DC) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 CPS

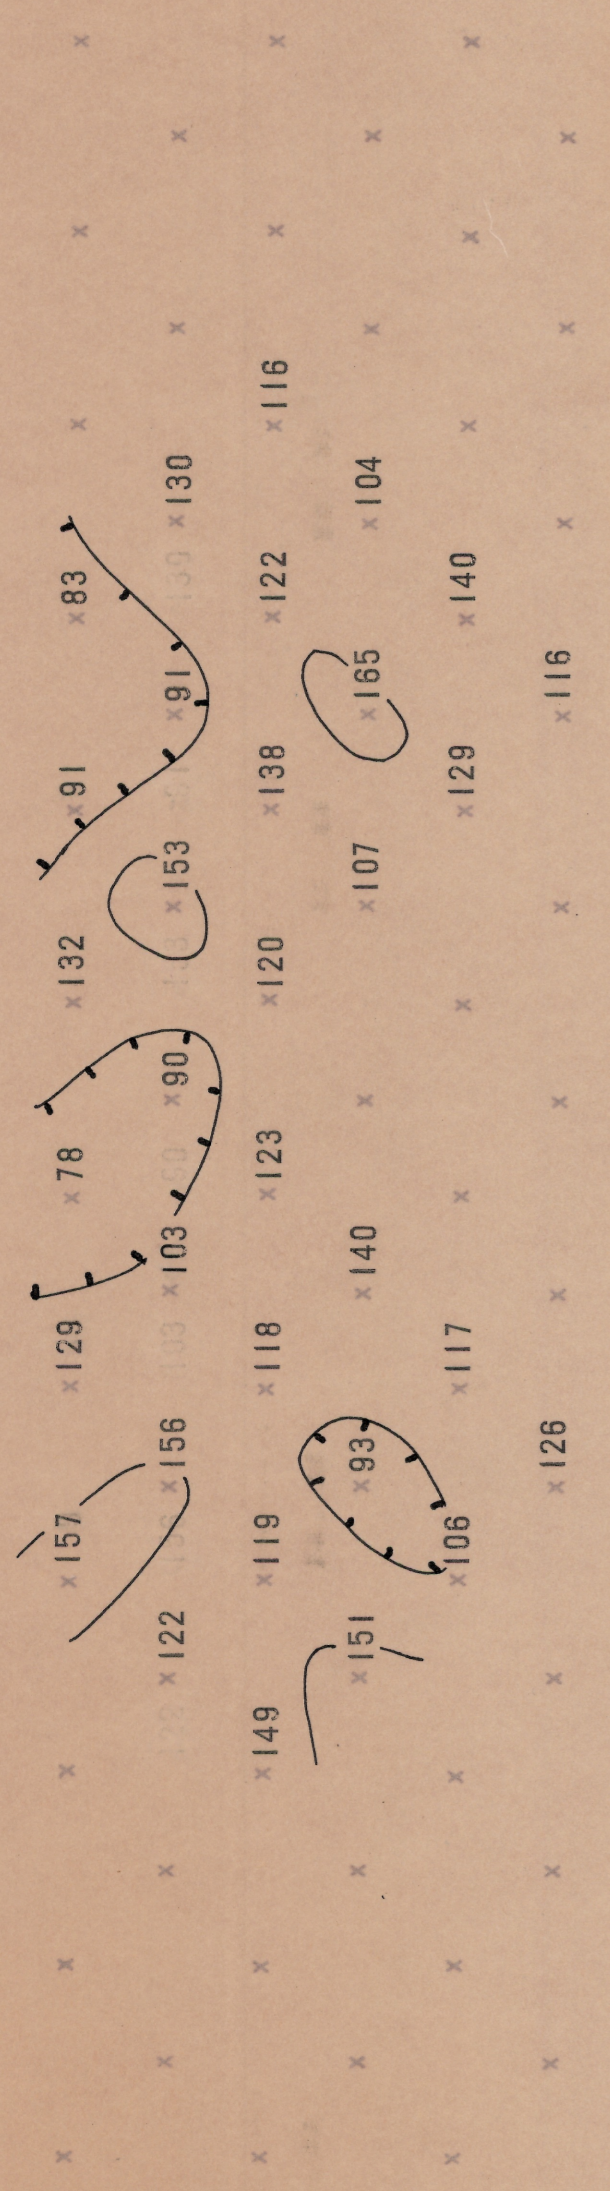

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 CPS

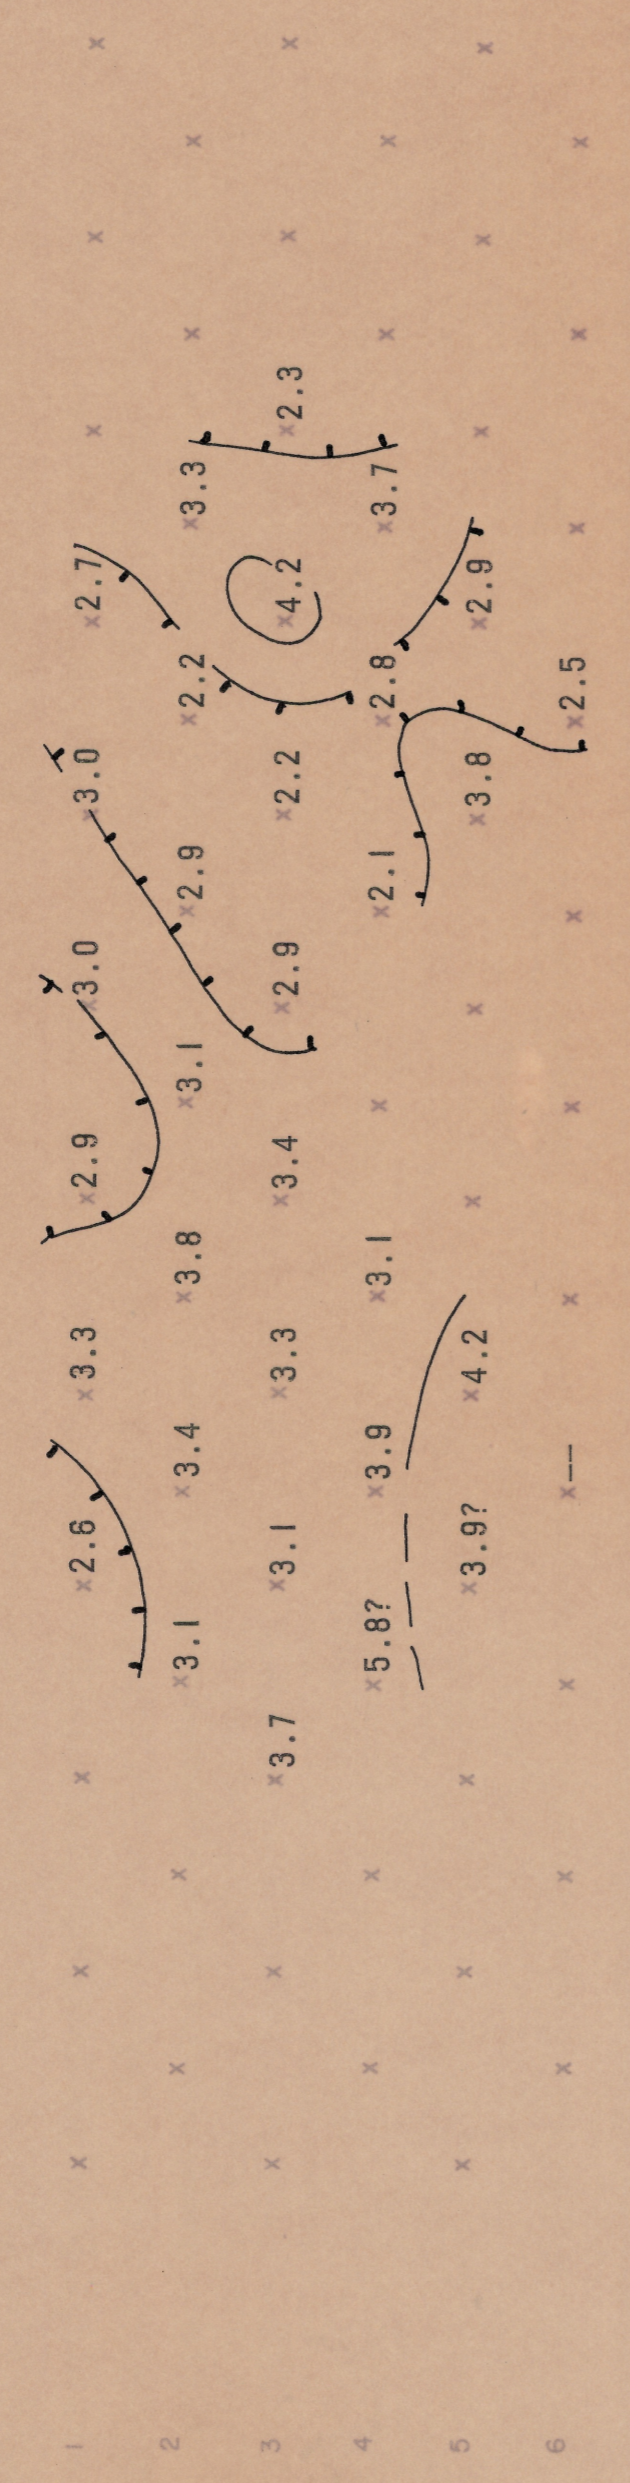

APPARANT METALLIC CONDUCTION FACTOR (MCF) $MCF = \frac{PFE \times 1000}{DC \times 100}$
CONTOUR INTERVAL LOGARITHMIC

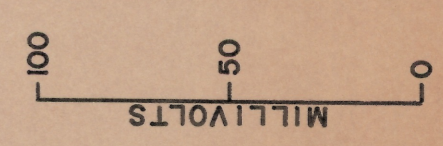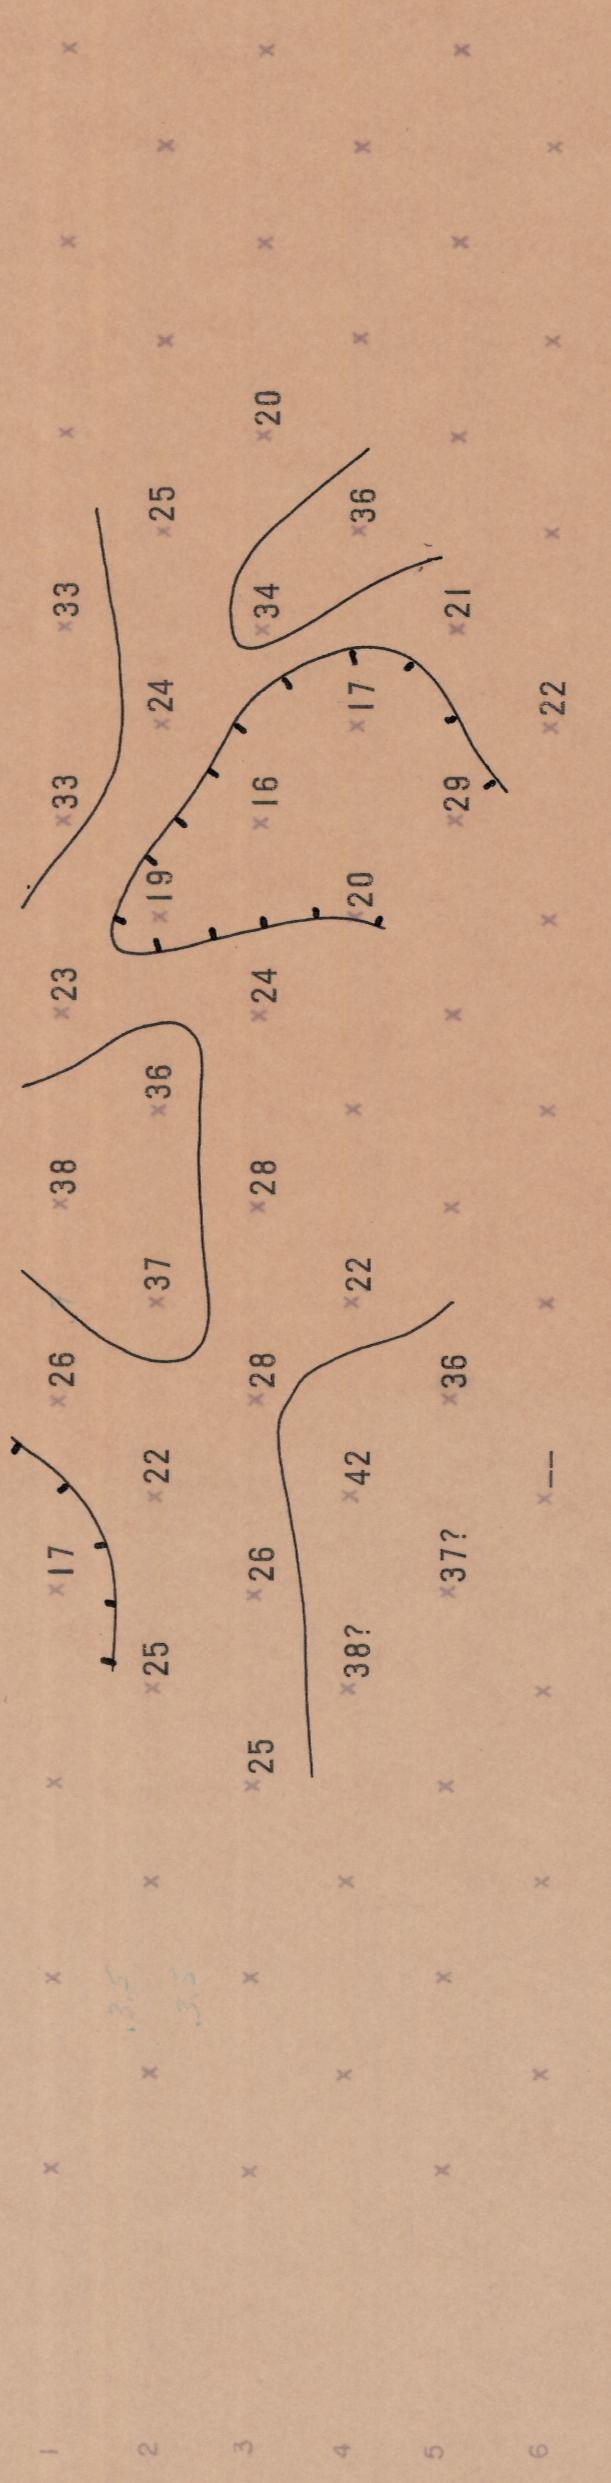

SELF POTENTIAL

WOOLEY MINE AREA
SECTIONAL DATA SHEET
LINE NO. 2 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: JULY 1968
FOR GUNNEX LIMITED