


ELECTRODES SURFACE  
STATIONS 60S  
0' INTERVAL BETWEEN  
SENDER & RECEIVER DIPOLES


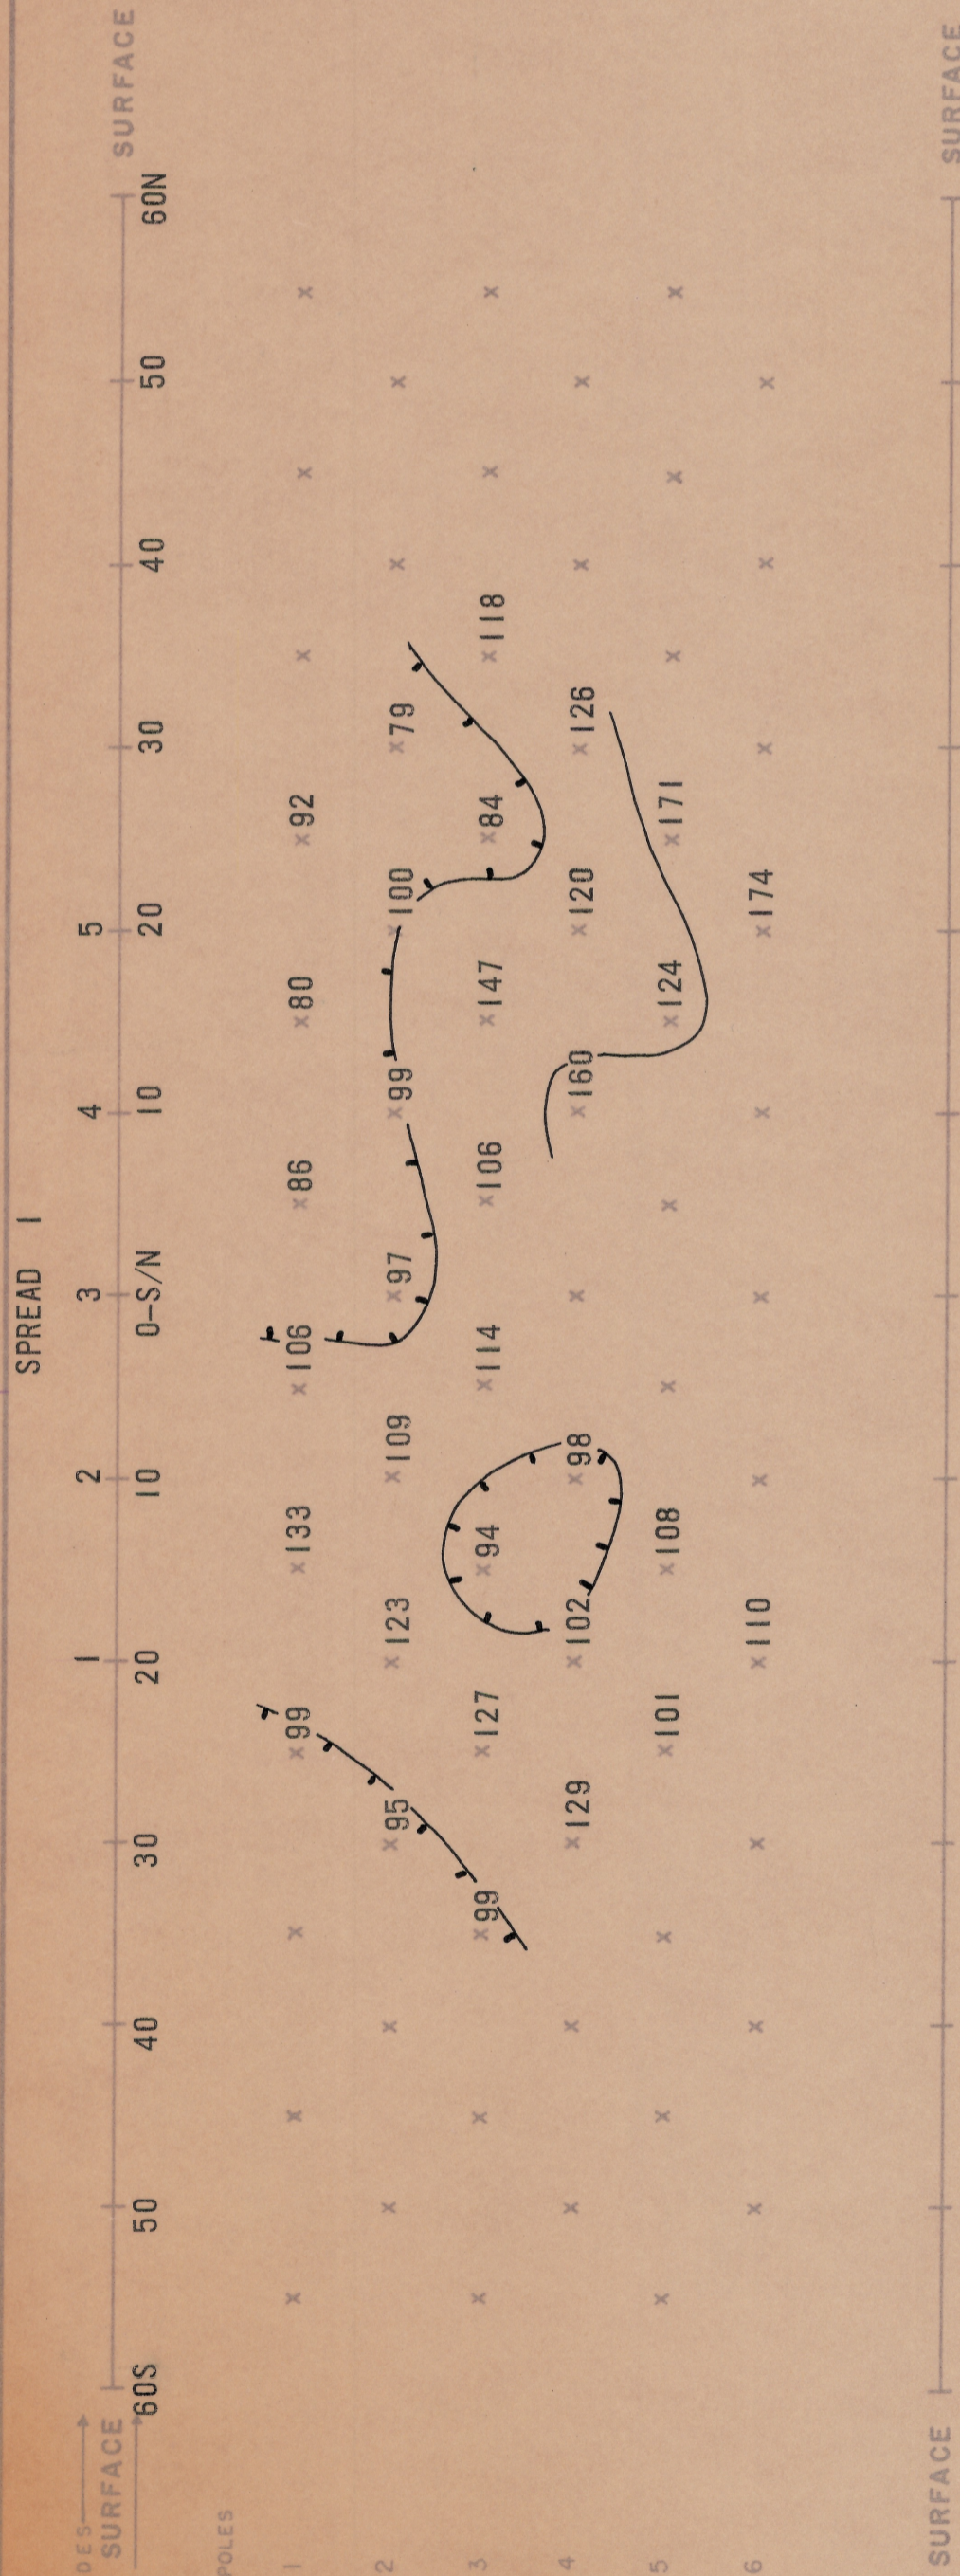


APPROXIMATE DATA FROM GRAPH 2:


Station	Spread (S)	Percent Frequency Effect (PFE)
1	10	2.7
1	20	2.7
1	30	2.6
1	40	2.7
1	50	2.7
2	10	2.7
2	20	2.7
2	30	2.7
2	40	2.7
2	50	2.7
3	10	3.3
3	20	3.6
3	30	3.6
3	40	3.6
3	50	3.6
4	10	4.0
4	20	4.2
4	30	4.2
4	40	4.2
4	50	4.2
5	10	3.8
5	20	3.8
5	30	3.8
5	40	3.8
5	50	3.8
6	10	4.3
6	20	4.3
6	30	4.3
6	40	4.3
6	50	4.3

APPROXIMATE DATA FROM GRAPH 3:

Station	Spread (S)	Apparent Metallic Conduction Factor (MCF)
1	10	23
1	20	25
1	30	27
1	40	27
1	50	27
2	10	23
2	20	25
2	30	27
2	40	27
2	50	27
3	10	31
3	20	32
3	30	32
3	40	32
3	50	32
4	10	32
4	20	32
4	30	32
4	40	32
4	50	32
5	10	25
5	20	25
5	30	25
5	40	25
5	50	25
6	10	30
6	20	30
6	30	30
6	40	30
6	50	30

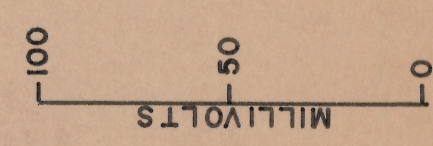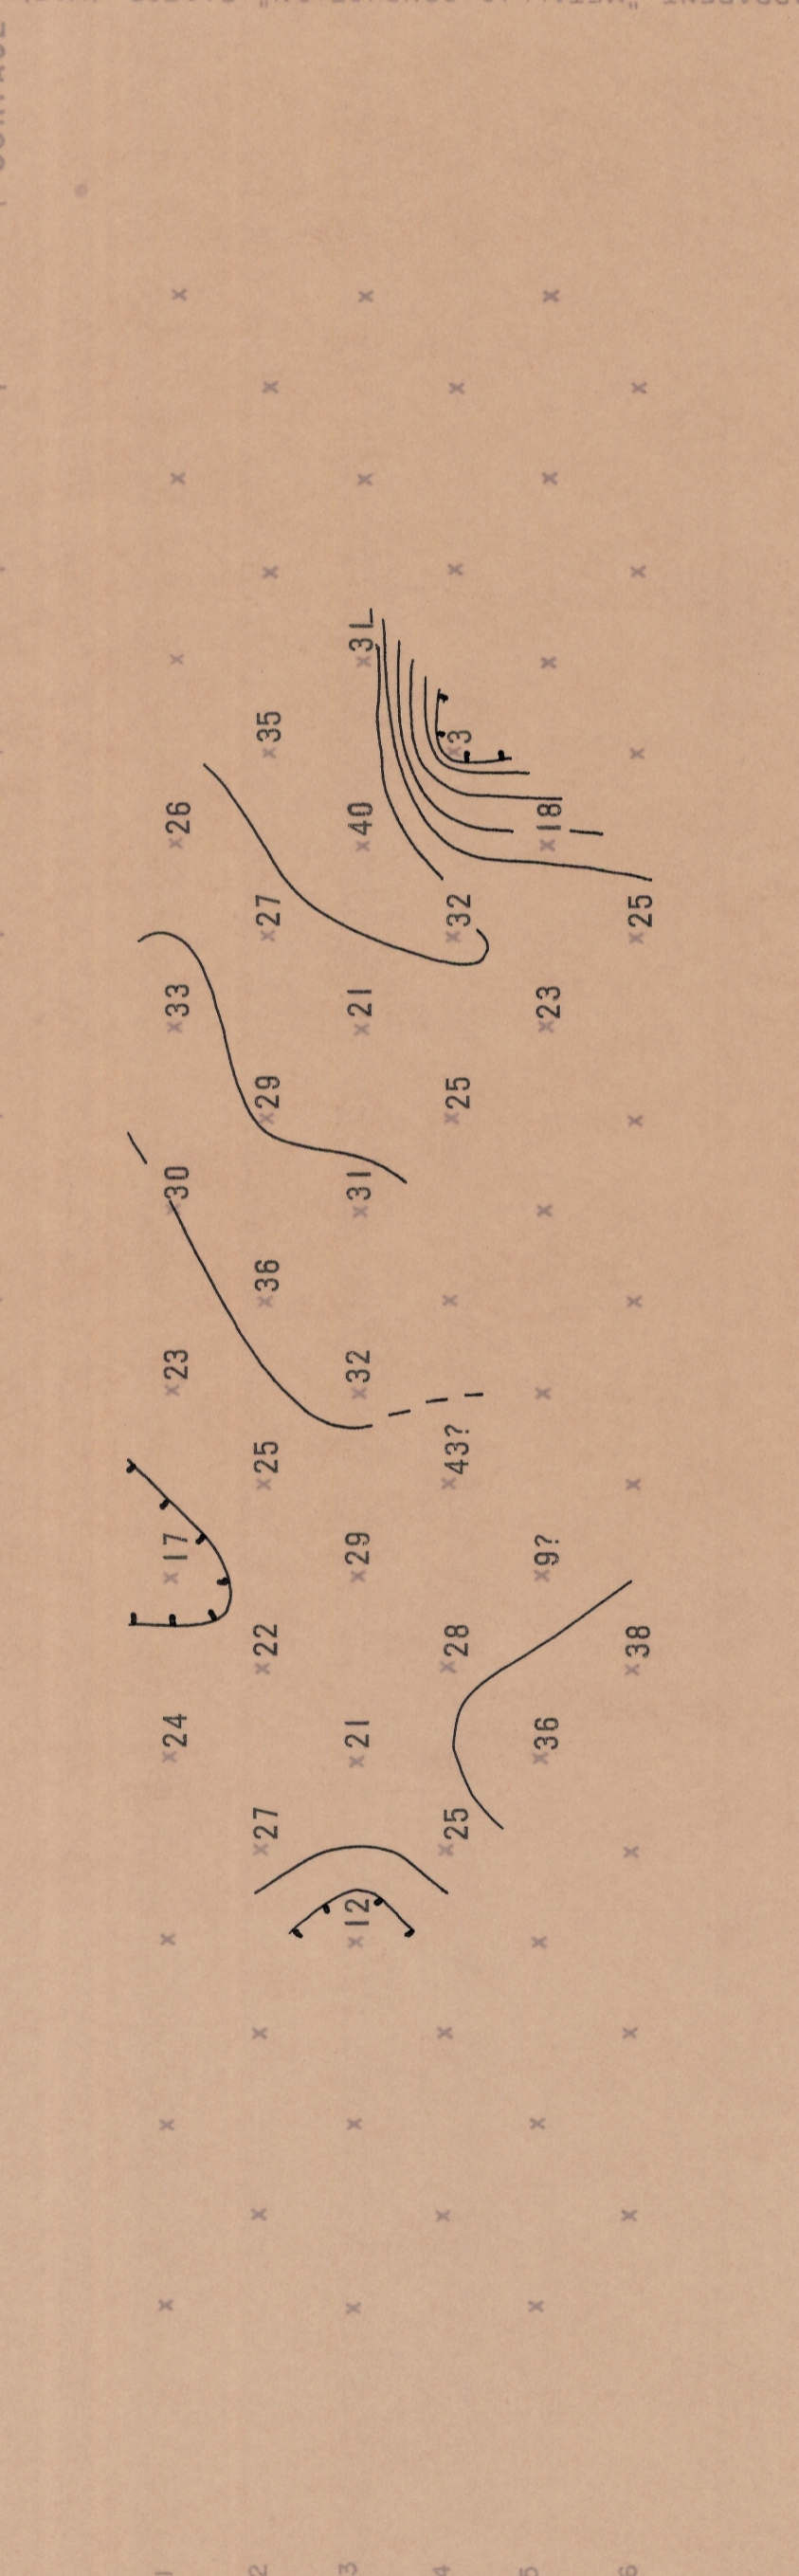

EXPLANATION

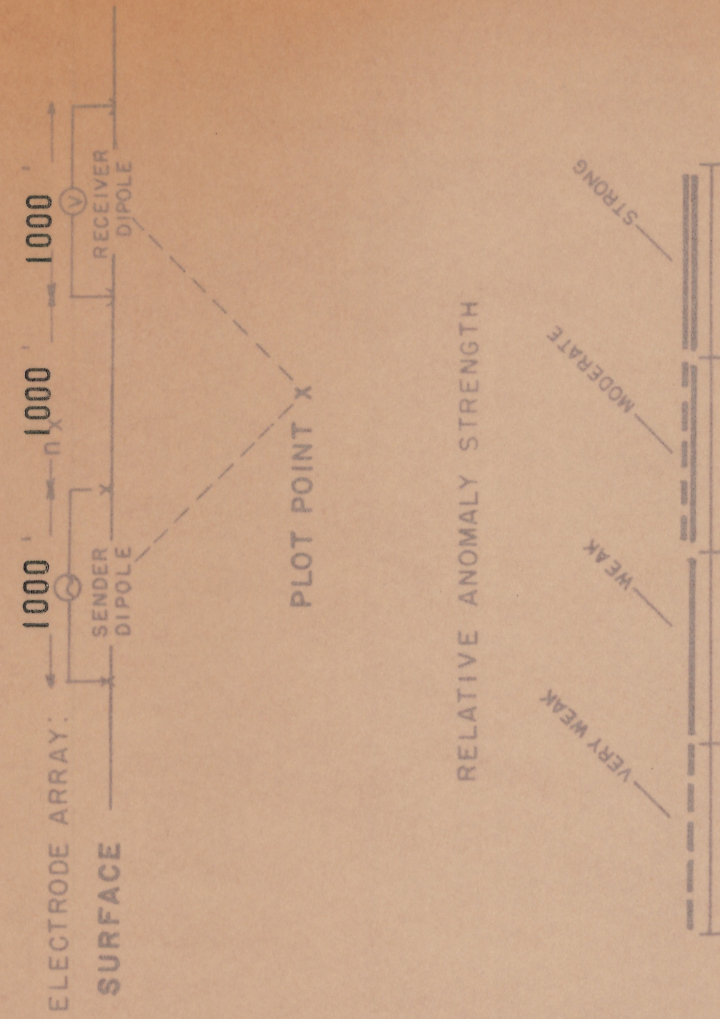

LOOKING WEST

WOOLEY MINE AREA

SECTIONAL DATA SHEET  
LINE NO. 3 (SPREAD 1)  
INDUCED POLARIZATION TRAVERSE  
HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1" = 1000' DATE: JULY 1968  
FOR GUNNEX LIMITED



SELF POTENTIAL

HEINRICHS 10-100