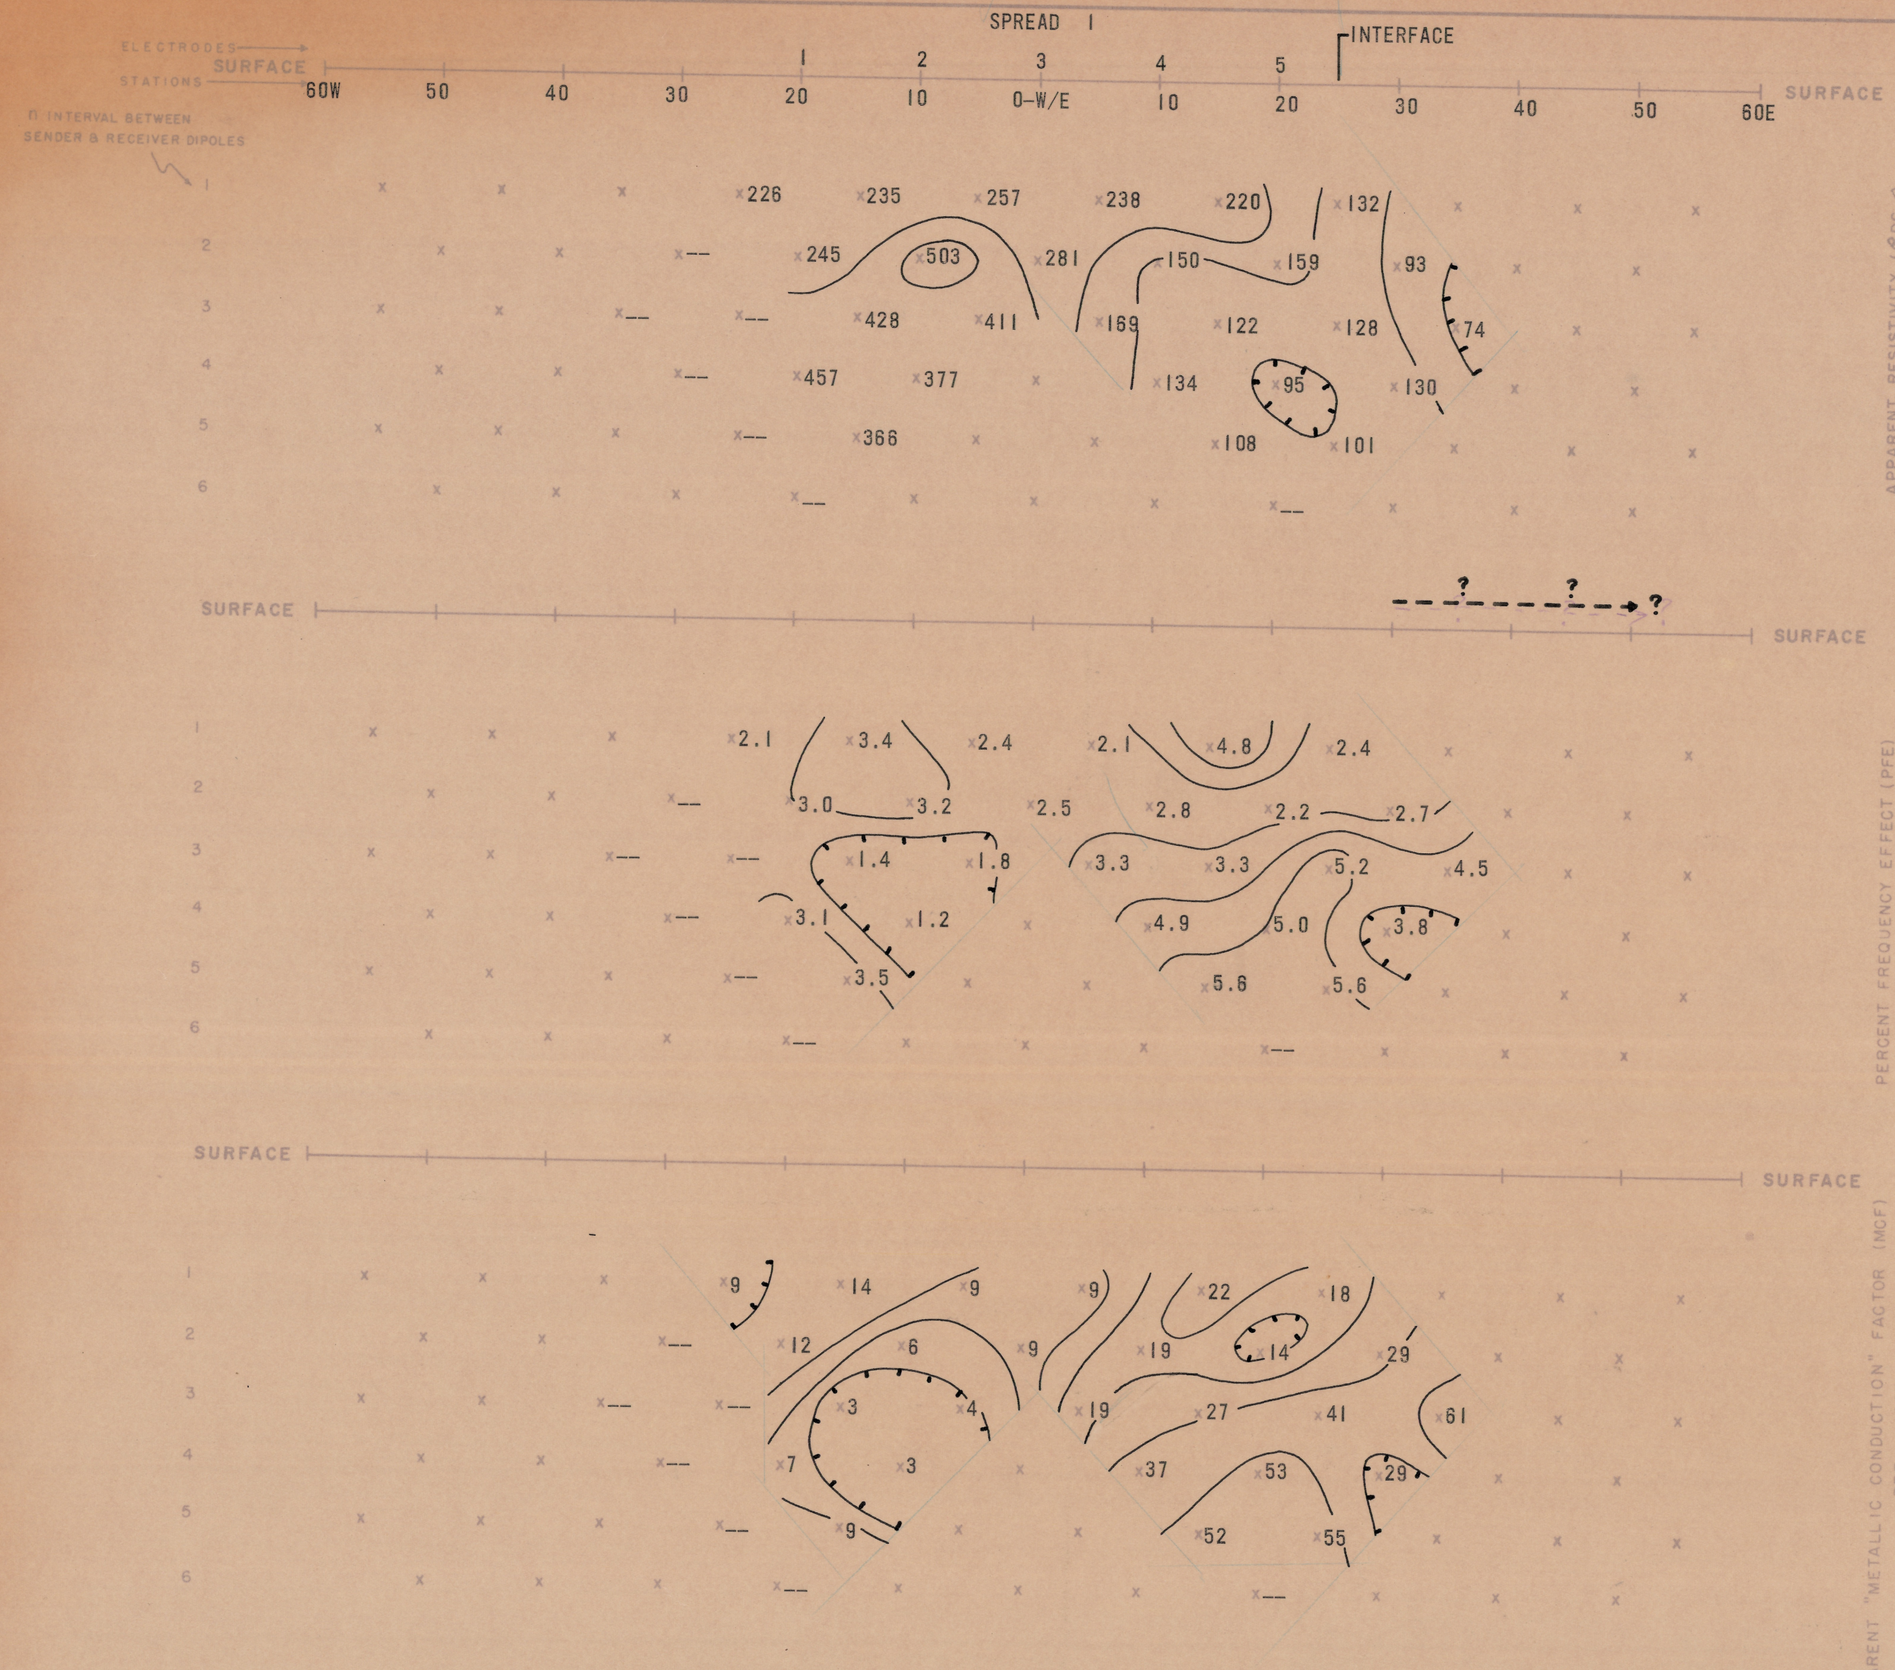

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$(MCF = \frac{PFE \times 1000}{\rho_{DC}})$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

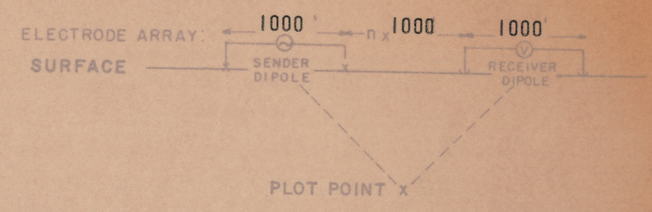

RELATIVE ANOMALY STRENGTH

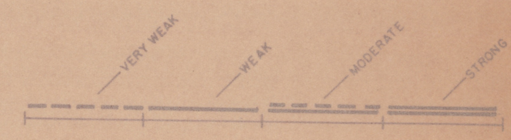

LOOKING NORTH

LOST BASIN AREA
KINGMAN AREA

SECTIONAL DATA SHEET
LINE NO. 1 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: SEP 1968

FOR

GUNNEX LIMITED

HEINRICHS
GEOEXPLORATION COMPANY
geophysical engineers
POST OFFICE BOX 5671 TUCSON, ARIZONA 85703
Phone: 602/623-0578 Cable: GEOEX, Tucson
vancouver sydney