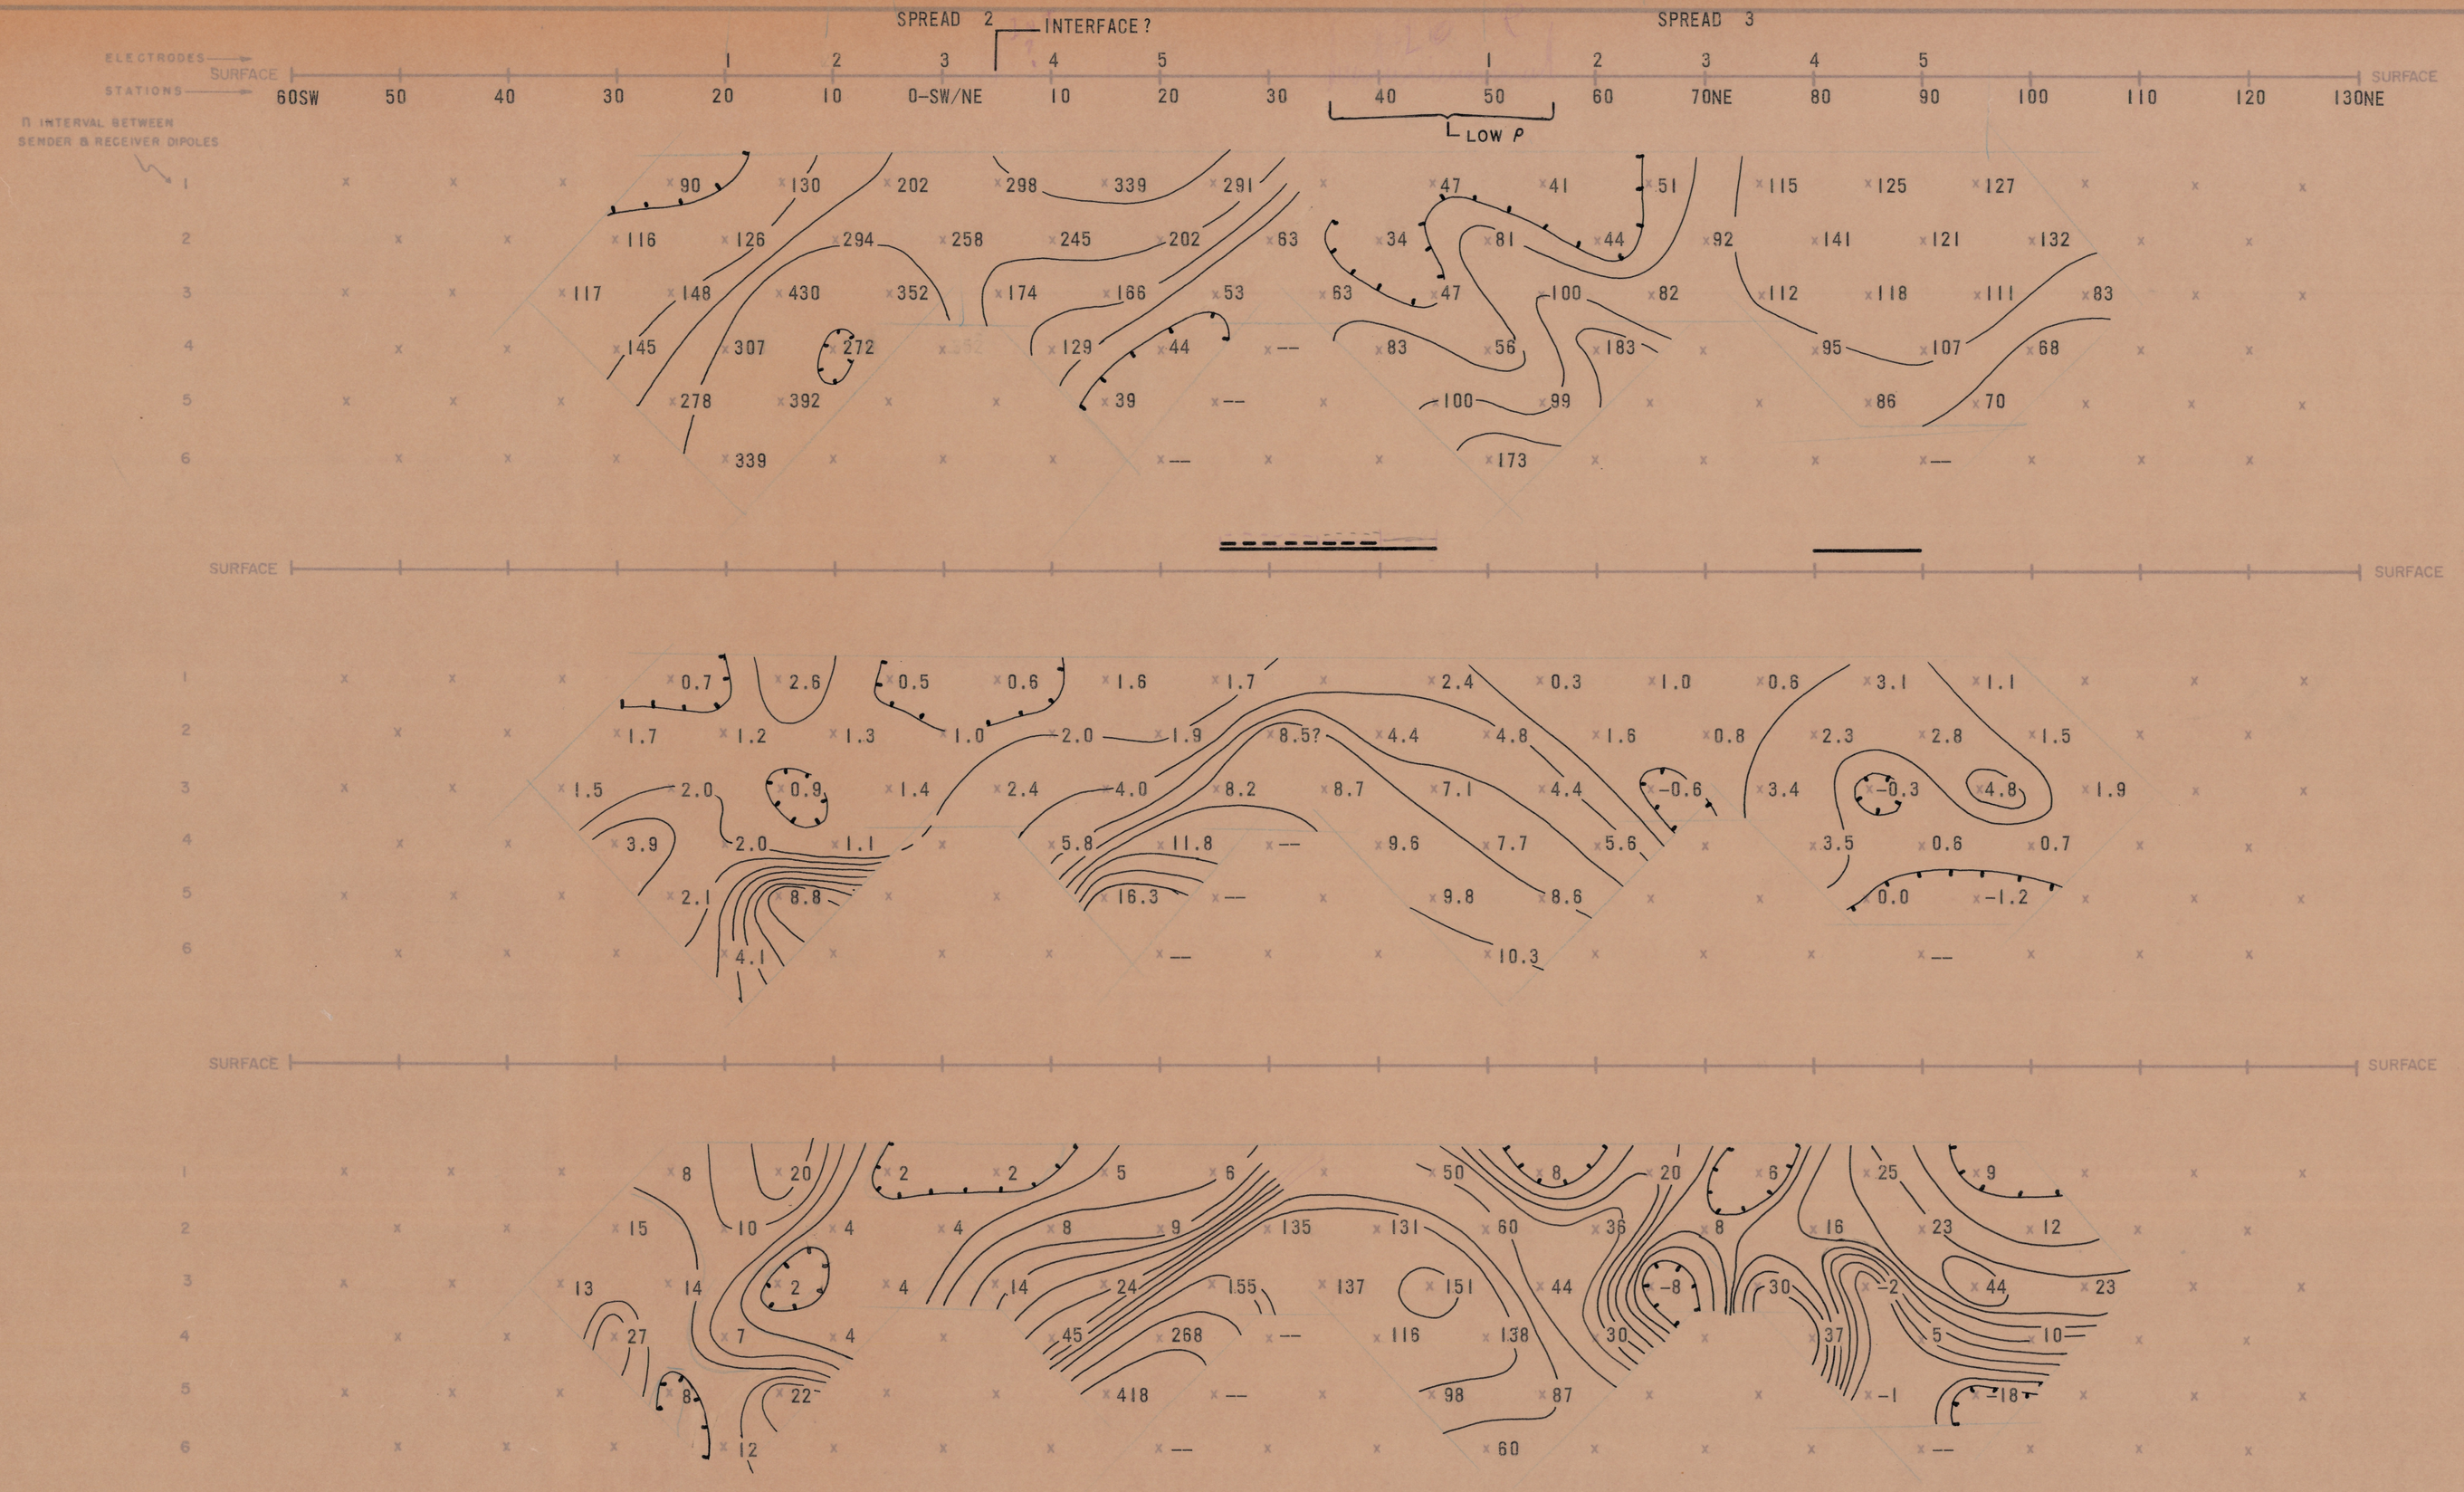

APPARENT RESISTIVITY (ρ DC, Ω FT) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = PFE X 1000 / ρDC 2π)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

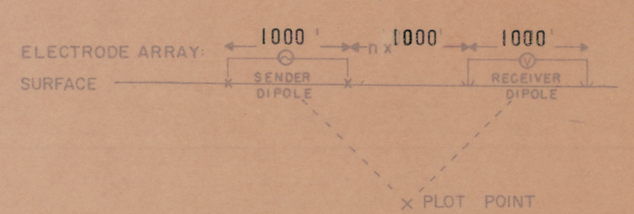

RELATIVE ANOMALY STRENGTH

LOOKING N 37° W

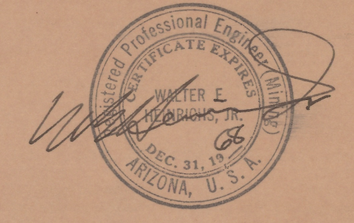

VEKOL MINE AREA

SECTIONAL DATA SHEET

LINE NO. 0 (SPREADS 2 & 3)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: NOV 1968

FOR

GUNNEX LIMITED

HEINRICHS
GEOEXPLORATION COMPANY
POST OFFICE BOX 5671, TUCSON, ARIZONA, 85703
Phone: 602/623-0578 Cable: GEOEX, Tucson
vancouver
sydney
geophysical engineers