

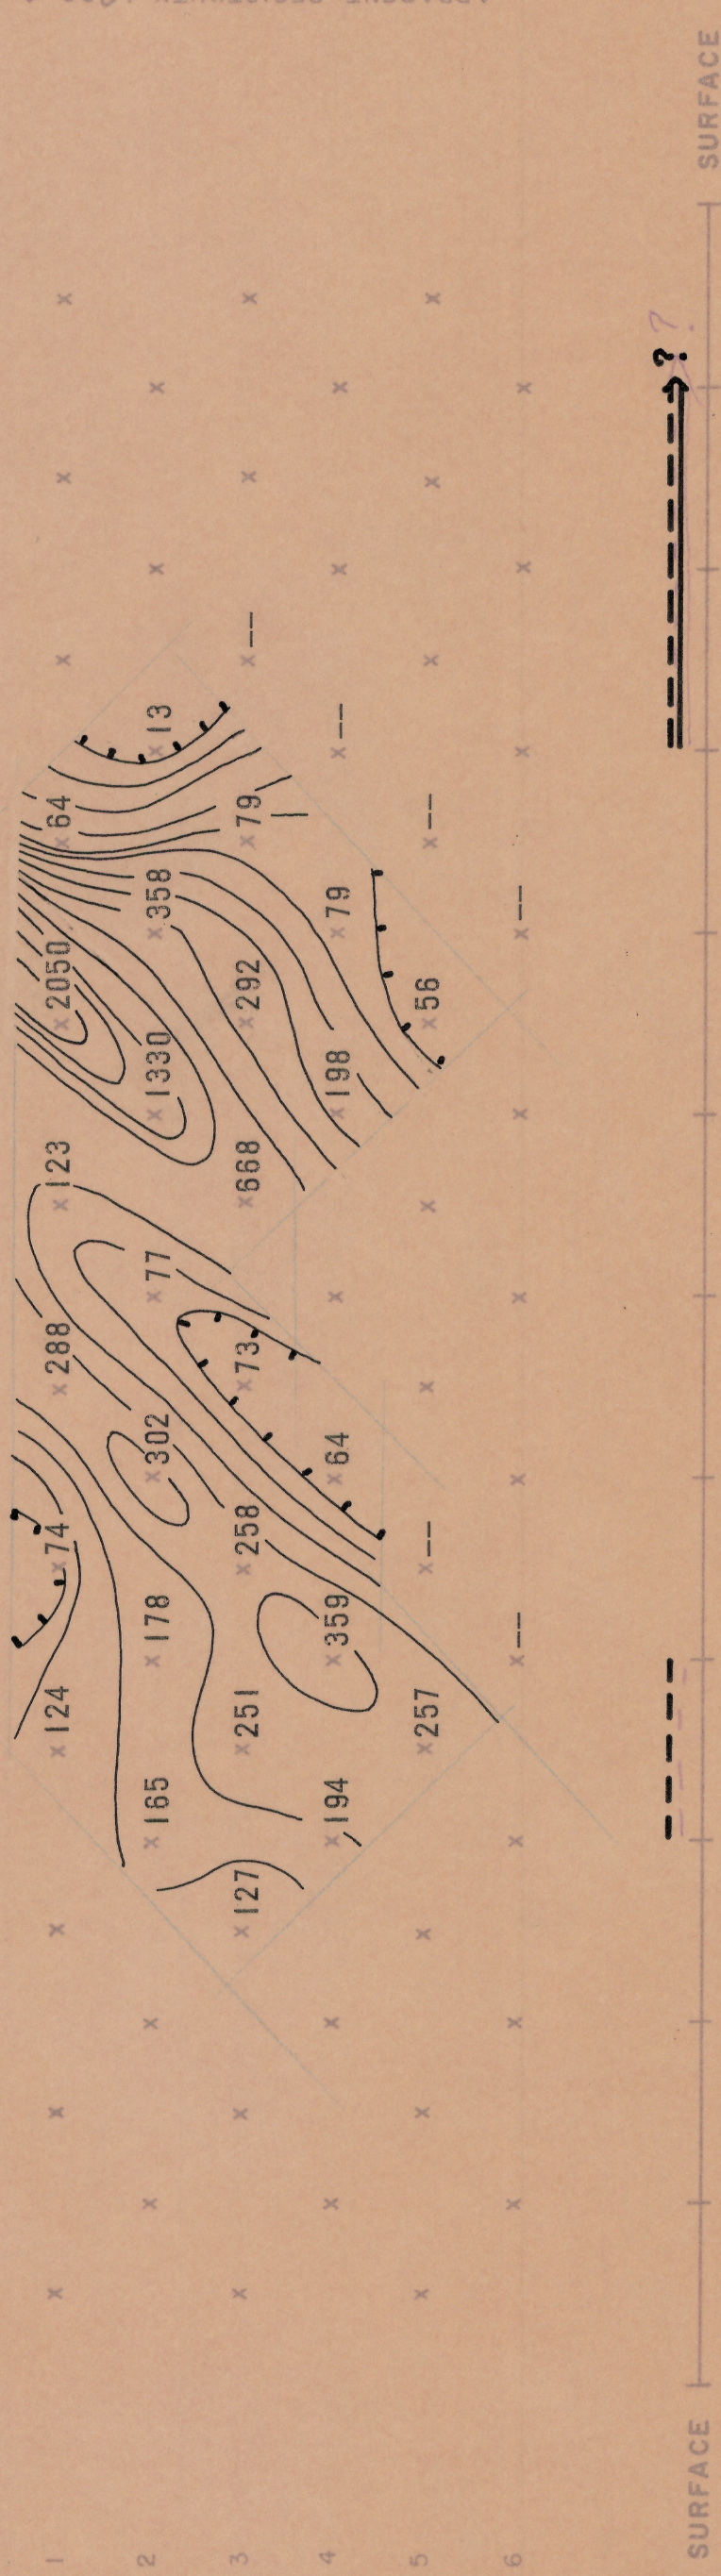


ELECTRODES SURFACE  
STATIONS  
72SW 62 52 42 32 22 12SW 4 8NE 18 28 38 48NE SURFACE


INTERFACIAL RESISTANCE  
SPREAD 1  
1 2 3 4 5  
2SW HIGH P

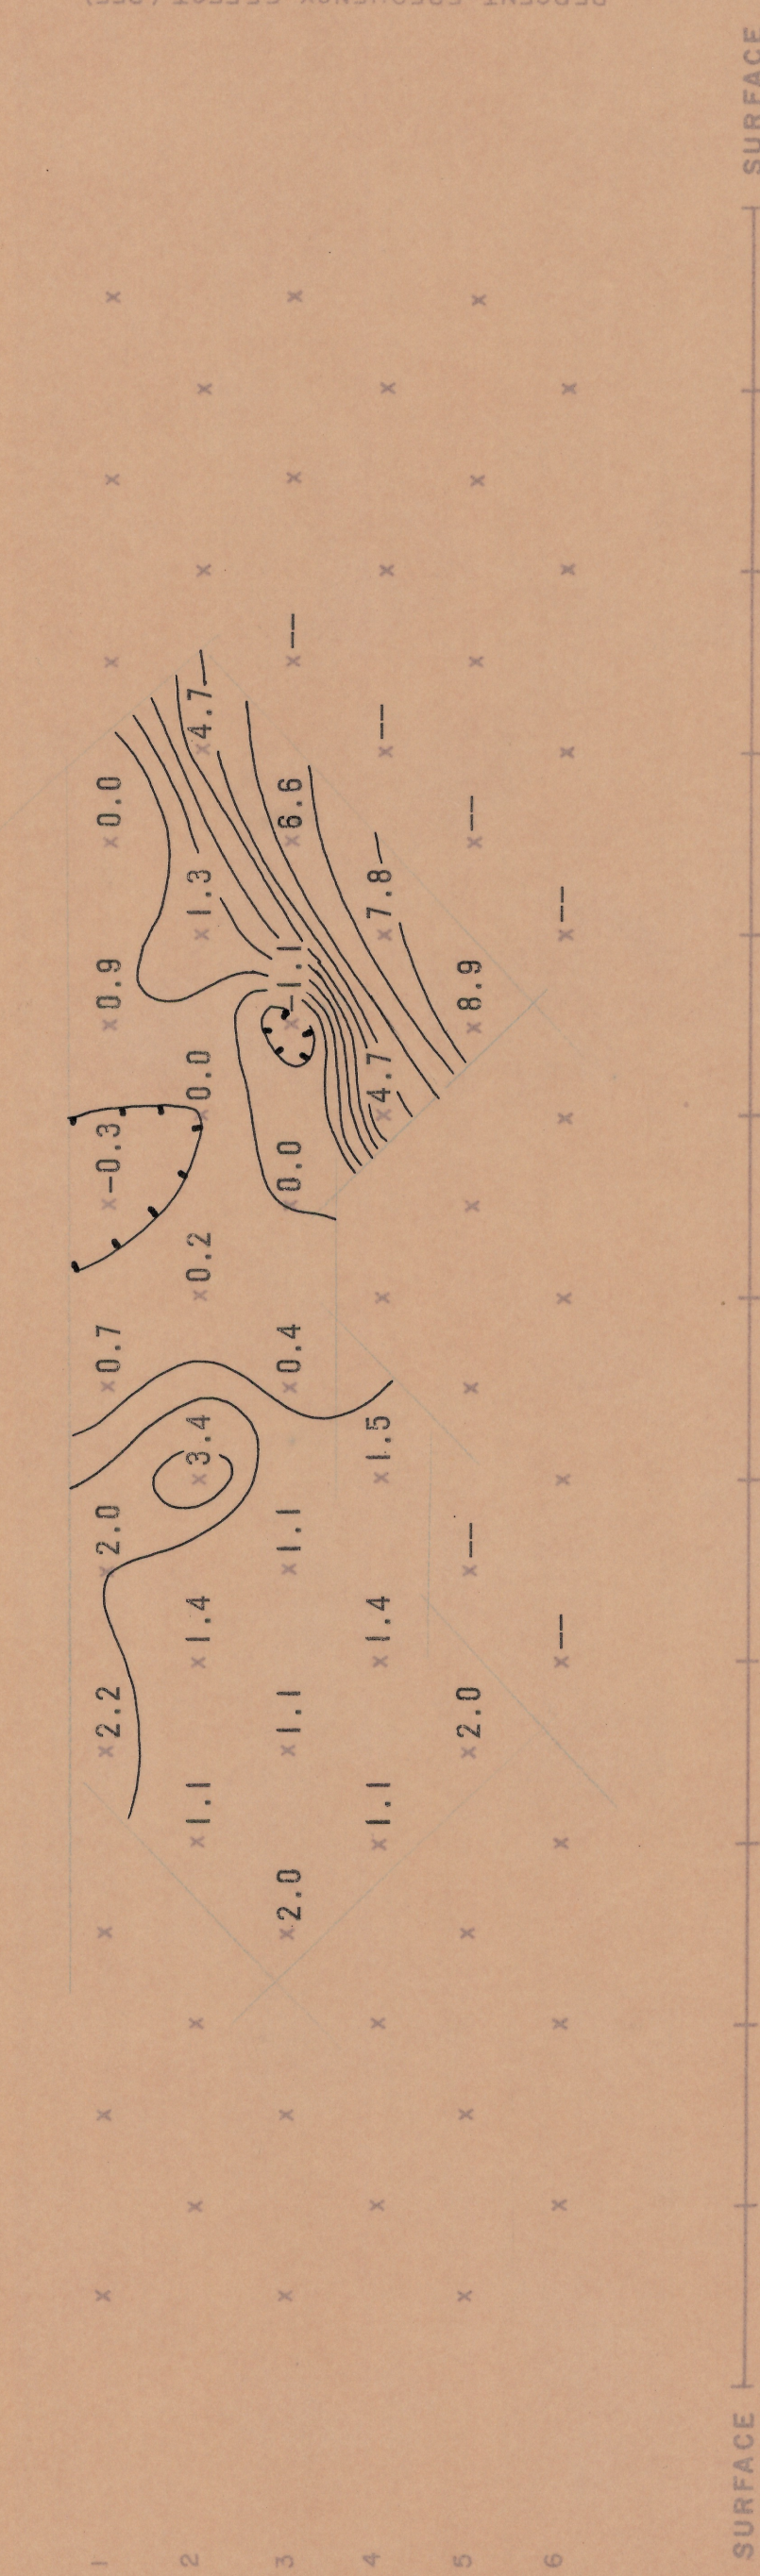


APPARENT RESISTIVITY ( $\rho_a$ ) IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 CPS

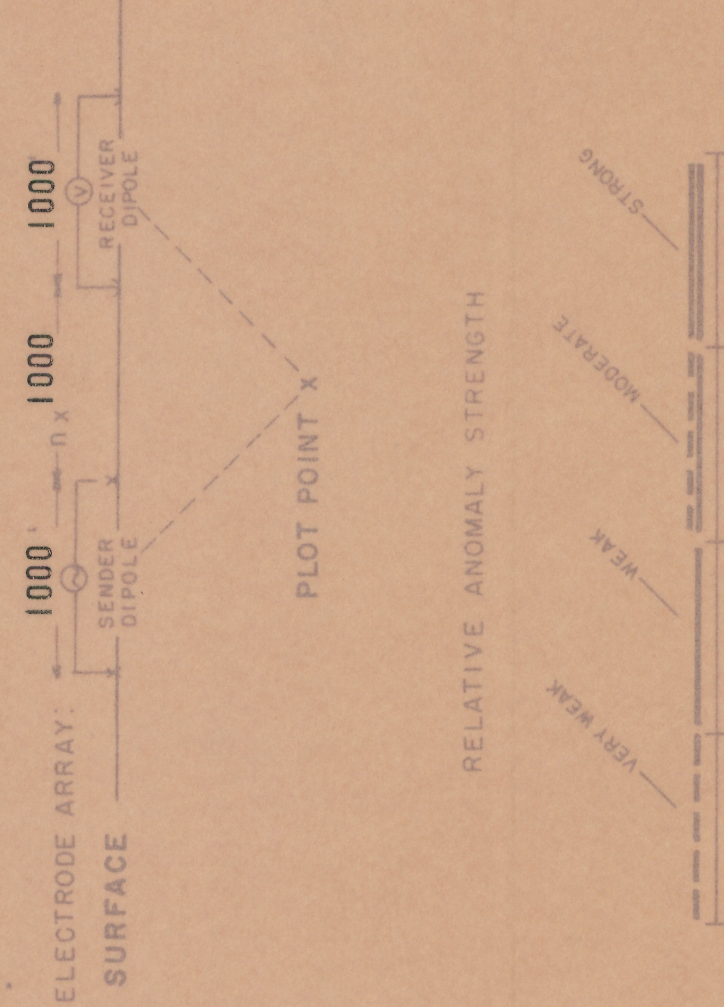

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 CPS

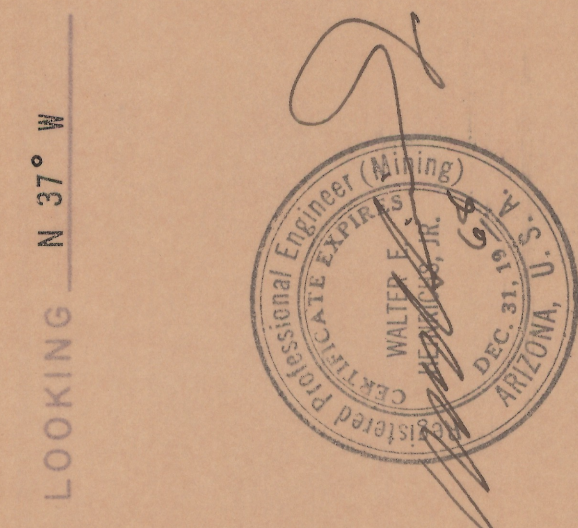

APPARENT METALLIC CONDUCTION FACTOR (MCF) CONTOUR INTERVAL LOGARITHMIC  
(MCF =  $\frac{\rho_a}{\rho_b} \times 1000$ )  
SENDER FREQUENCY: 0.05 CPS

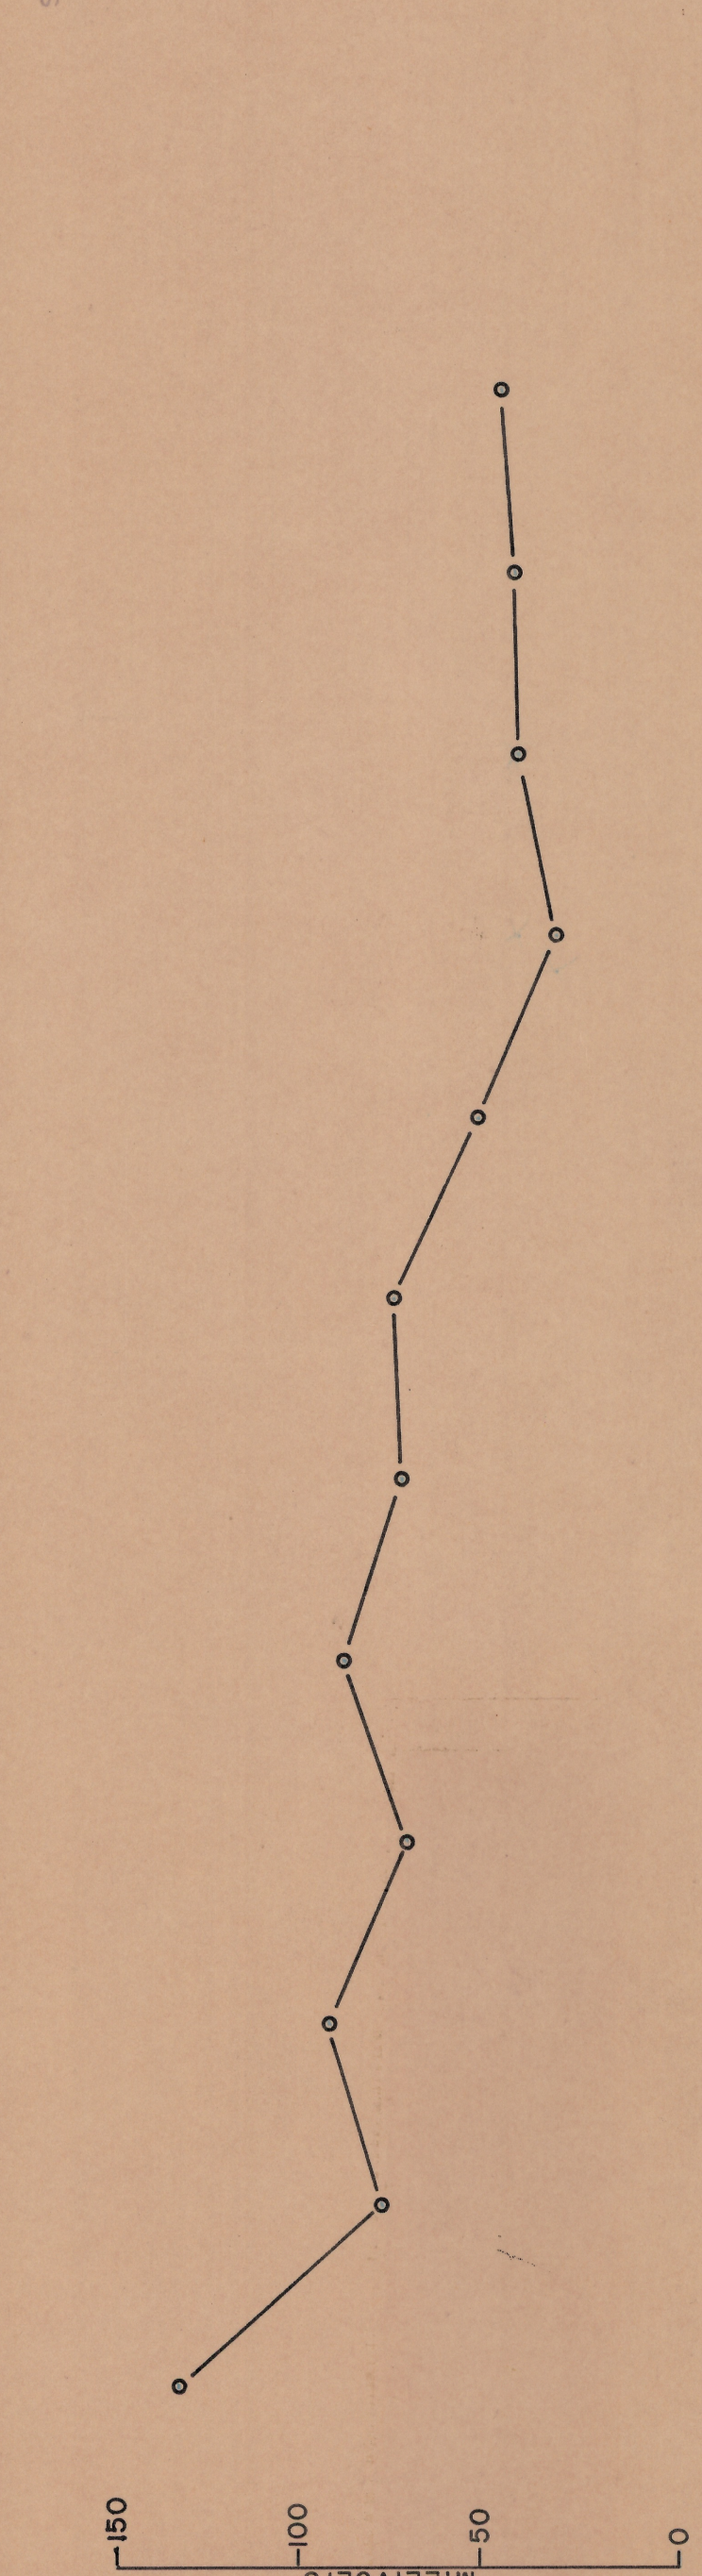

VEKOL MINE AREA  
SECTIONAL DATA SHEET  
LINE NO. IS (SPREAD 1)  
INDUCED POLARIZATION TRAVERSE  
HEINRICH'S GEOEXPLORATION COMPANY  
SCALE: 1" = 1000' DATE: NOV 1968  
FOR GUNNEX LIMITED