



44410-20-107 H/S 53 bottom

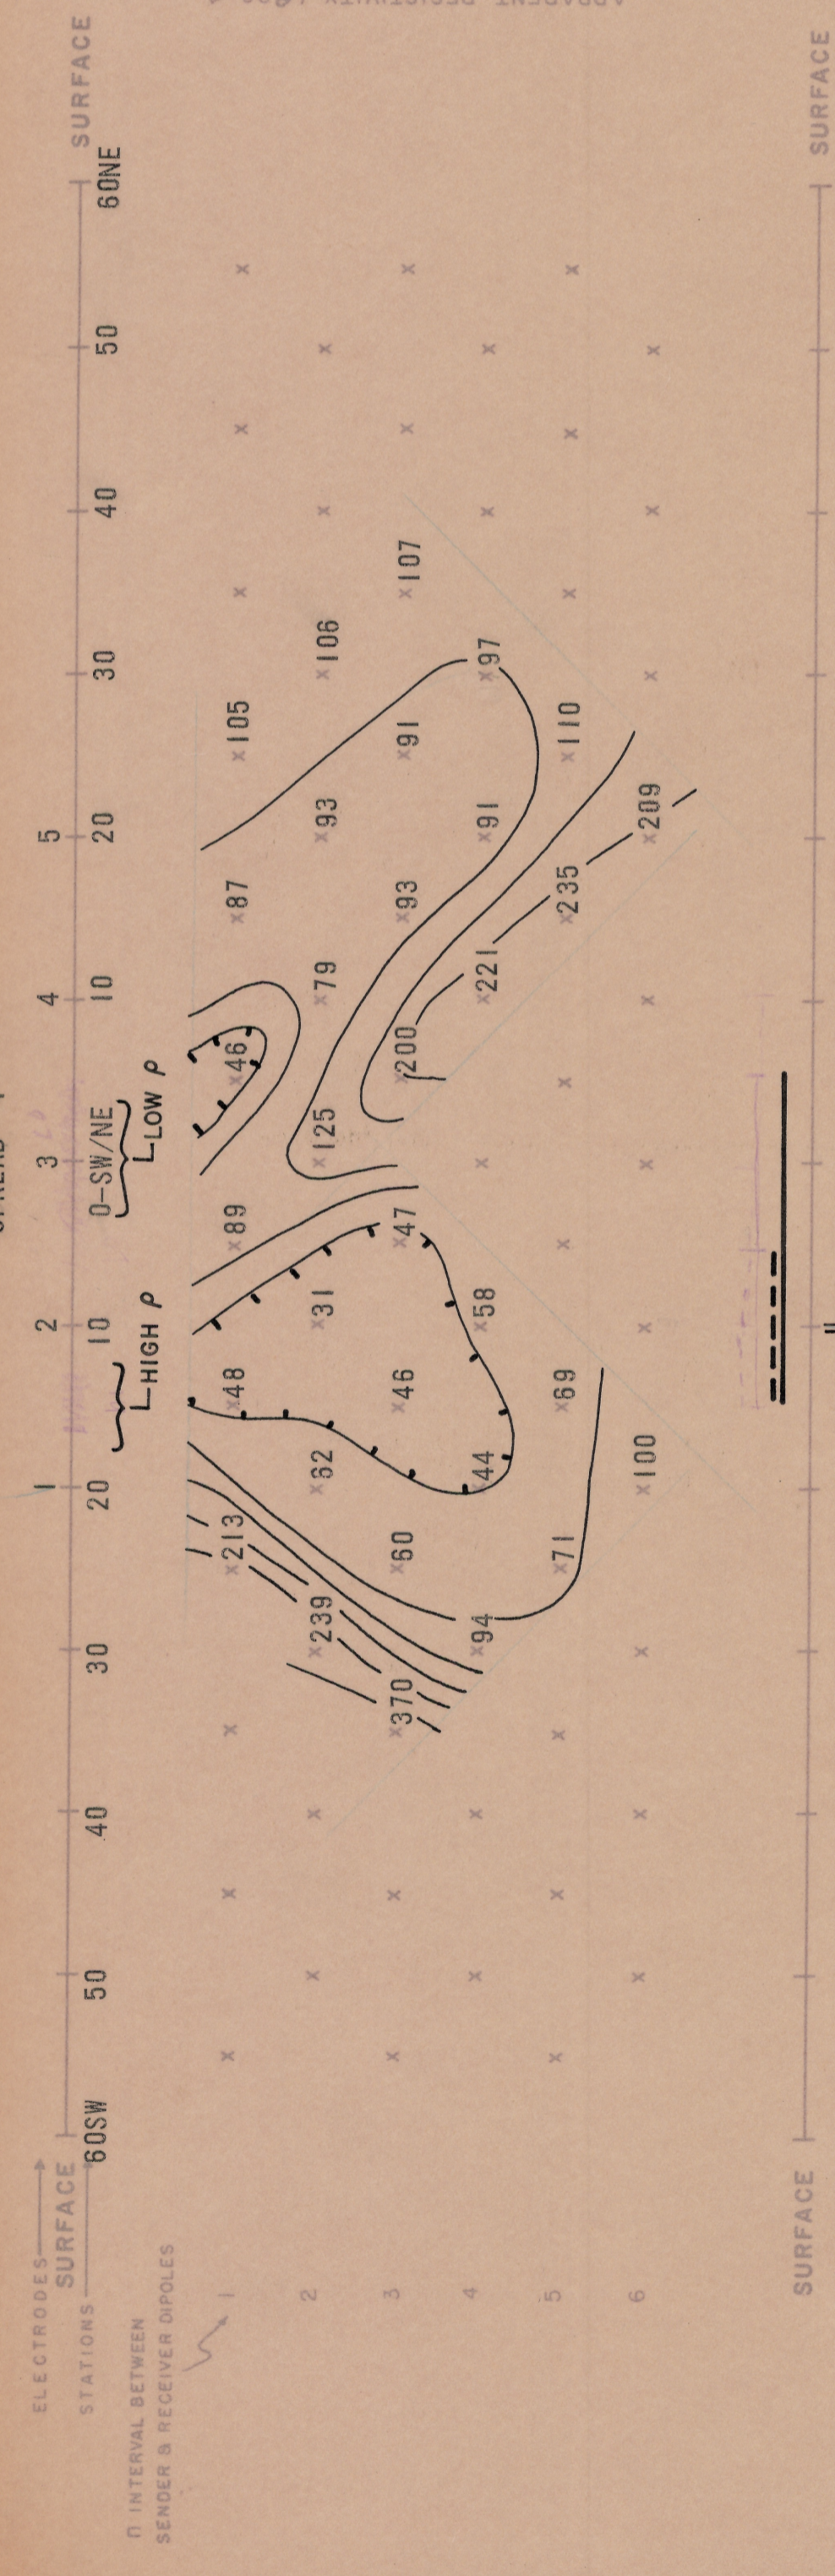

APPARENT RESISTIVITY (DC) IN UNITS OF OHM FEET (DC) $\frac{\rho}{4\pi}$


CONTOUR INTERVAL LOGARITHMIC

SENDER FREQUENCY: 0.05 CPS

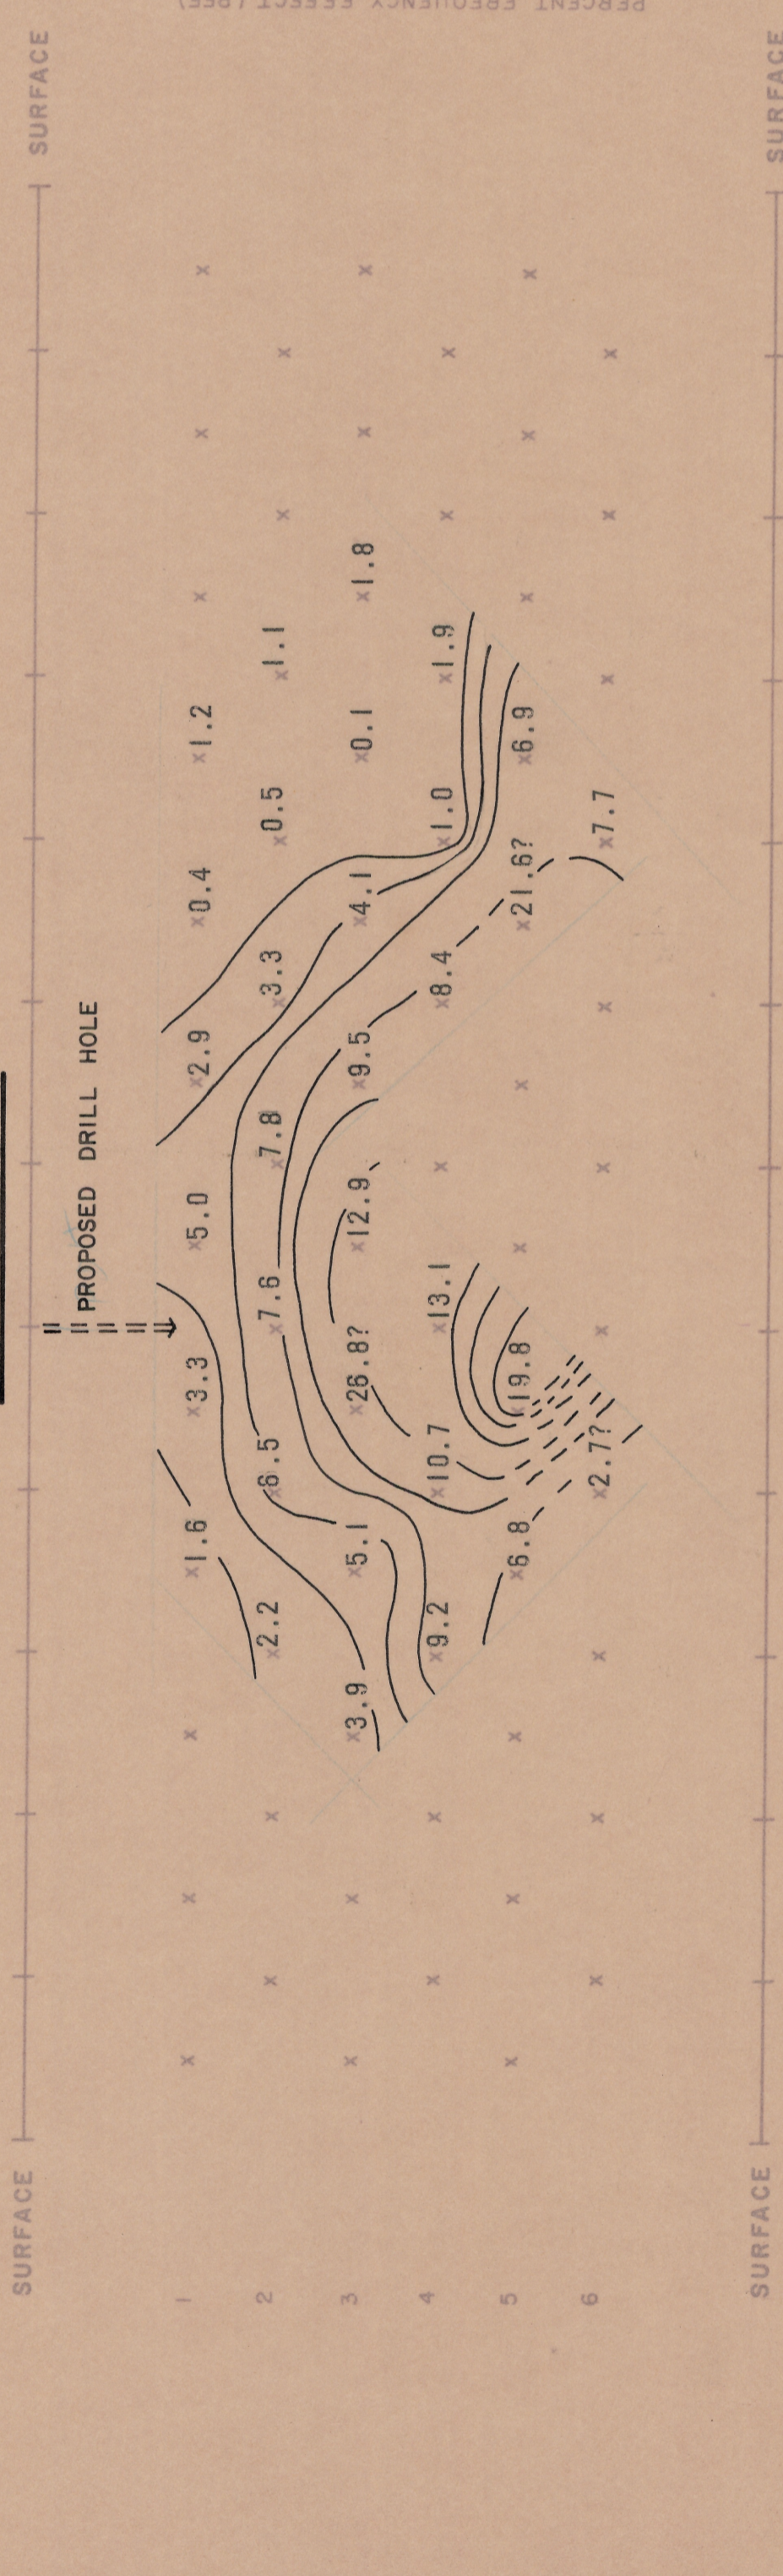

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT


SENDER FREQUENCIES: 0.05 & 3.0 CPS

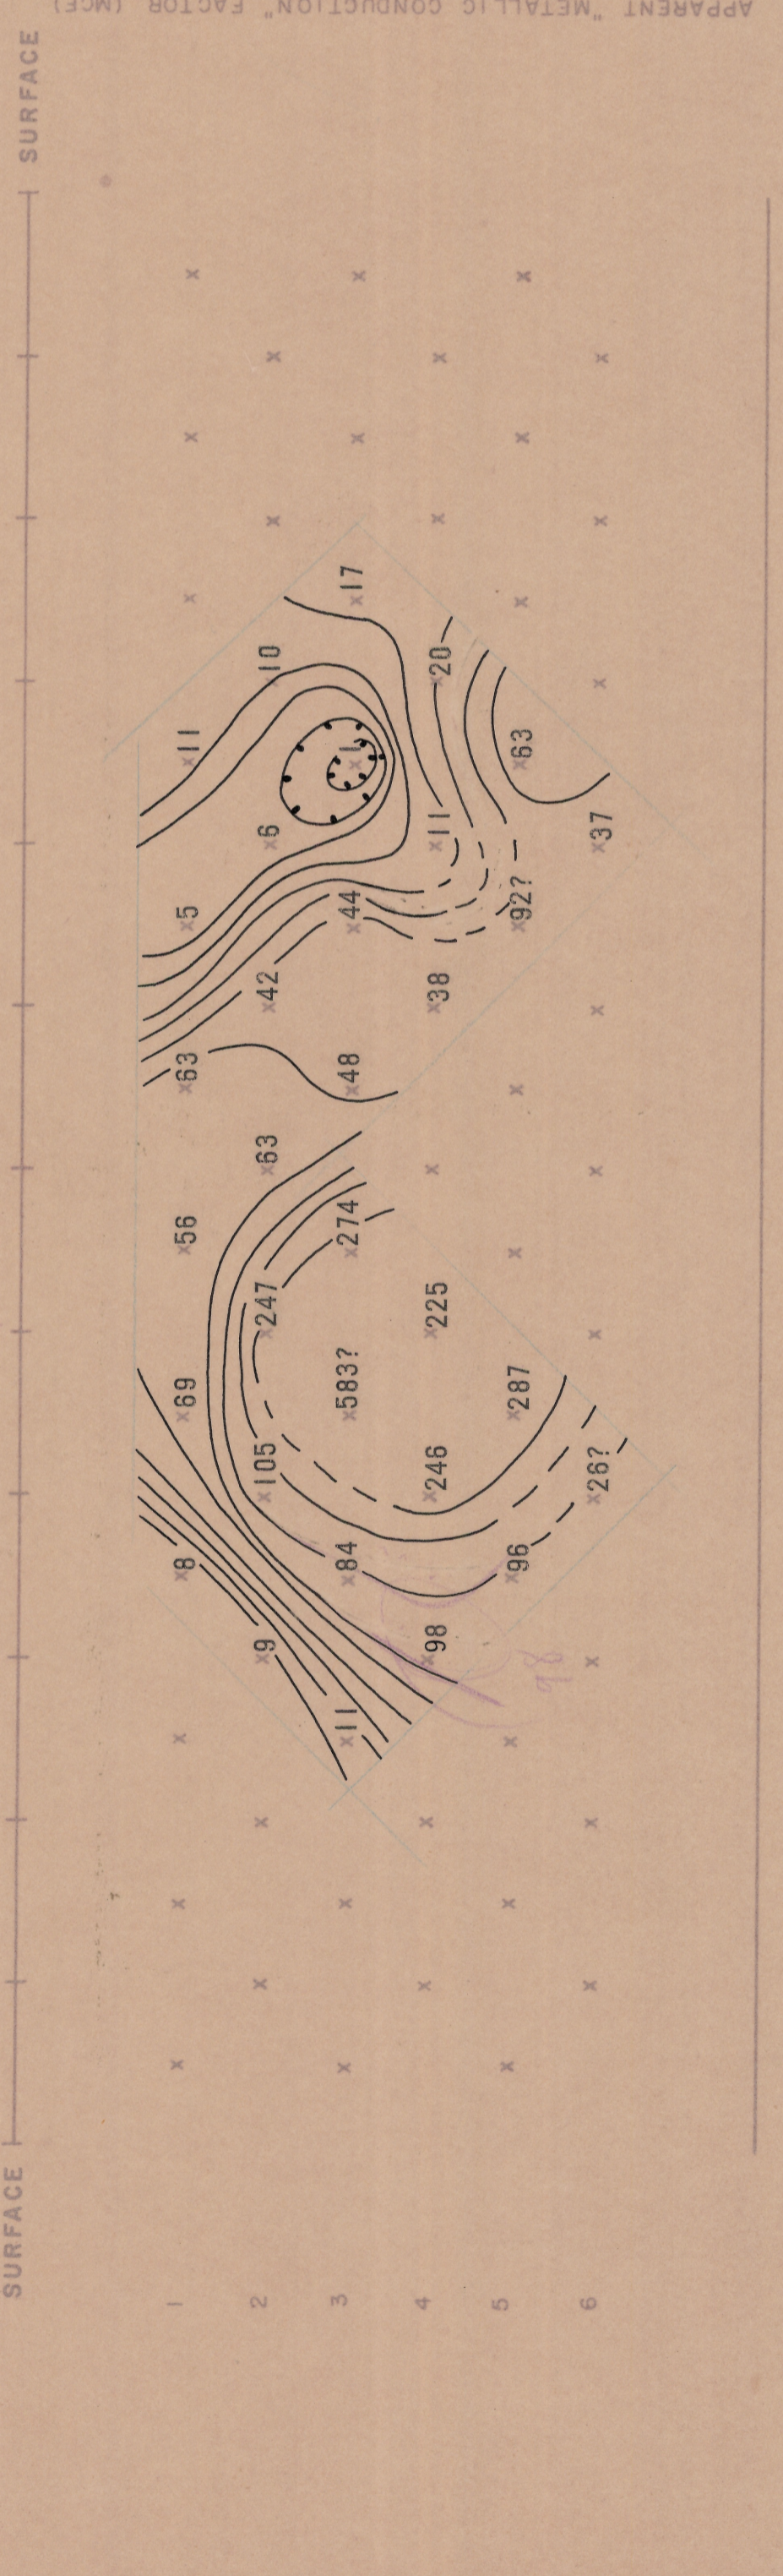


APPARENT "METALLIC CONDUCTION" FACTOR (MCF) $(MCF = \frac{\rho_{DC} \times 1000}{\rho_{AC} \times 1000})$

CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

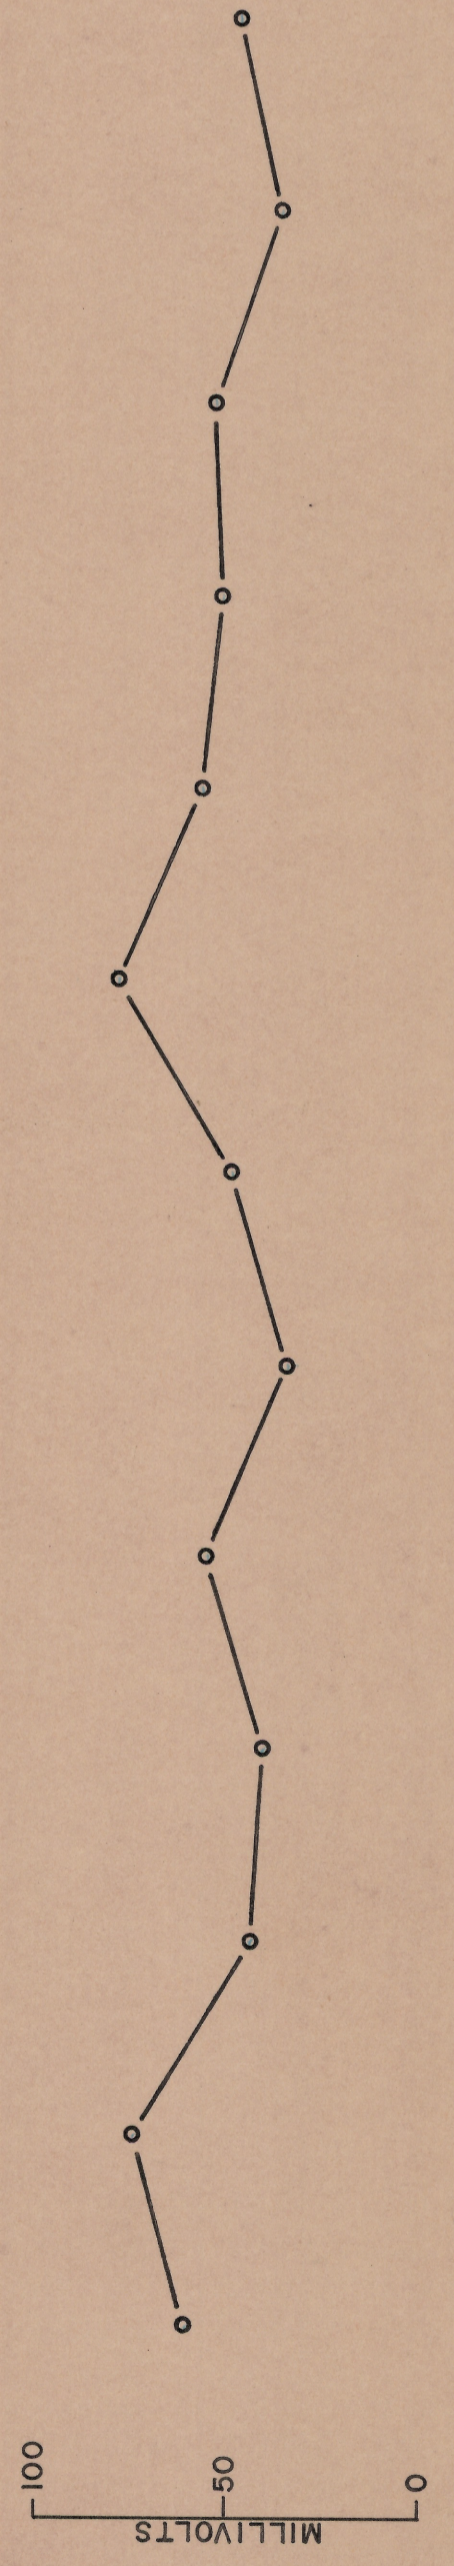

EXPLANATION

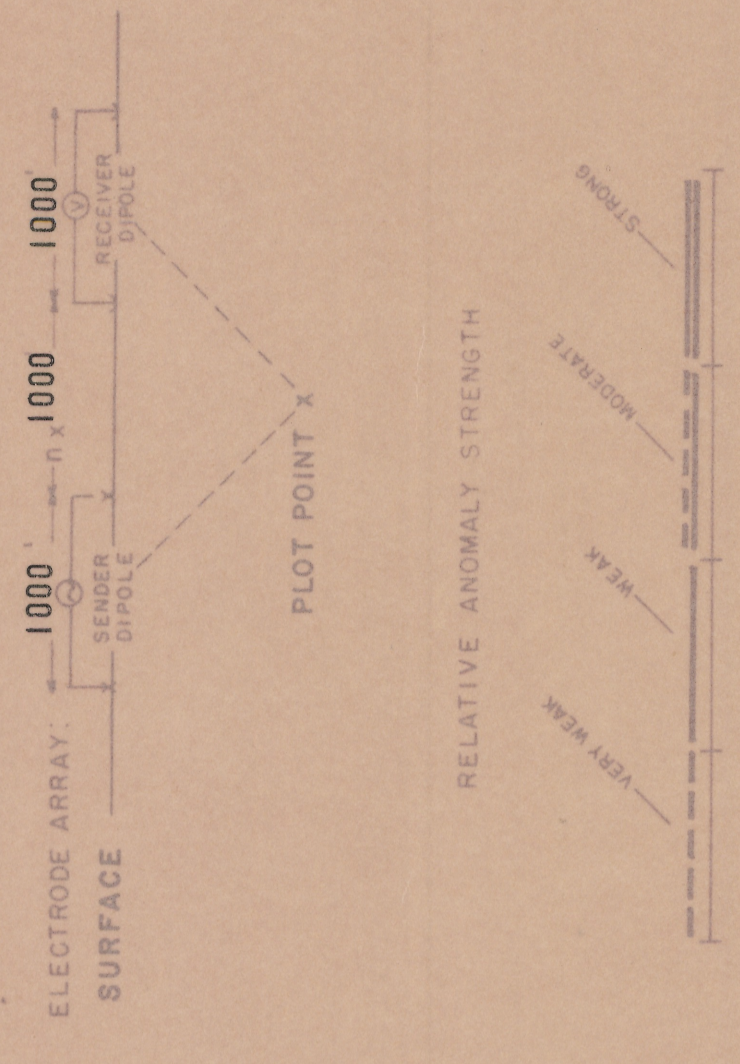

LOOKING N 38° W



VEKOL MINE AREA

SECTIONAL DATA SHEET
LINE NO. 7 (SPREAD I)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: NOV 1968

FOR
GUNNEX LIMITED