


EXPLANATION



LOOKING N 37° W

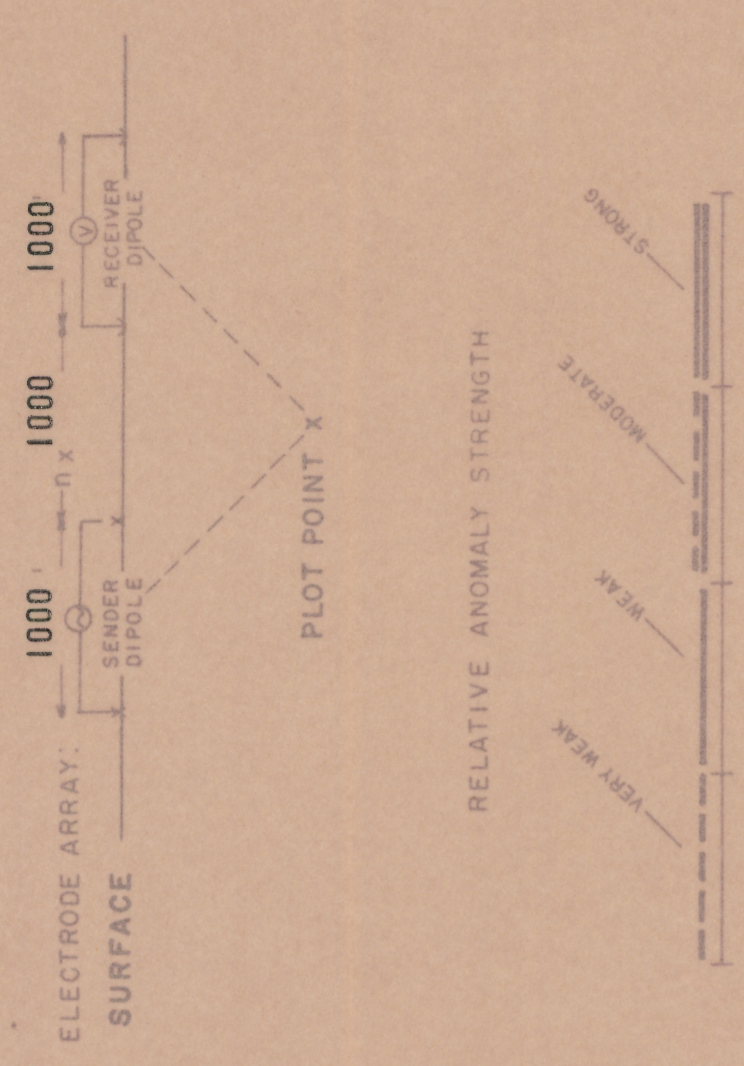

VEKOL MINE AREA

SECTIONAL DATA SHEET
LINE NO. 6 (SPREAD 1)
INDUCED POLARIZATION TRAVERSE
HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: NOV 1968
FOR
GUNNEX LIMITED

APPEARANT RESISTIVITY (P) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 CPS

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 CPS

APPEARANT "METALLIC CONDUCTION" FACTOR (MCF)
 $MCF = \frac{P_{DC}}{P_{AC}} \times 1000$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

2911-910-100-105 WIK 38 11/68