SPREAD 1

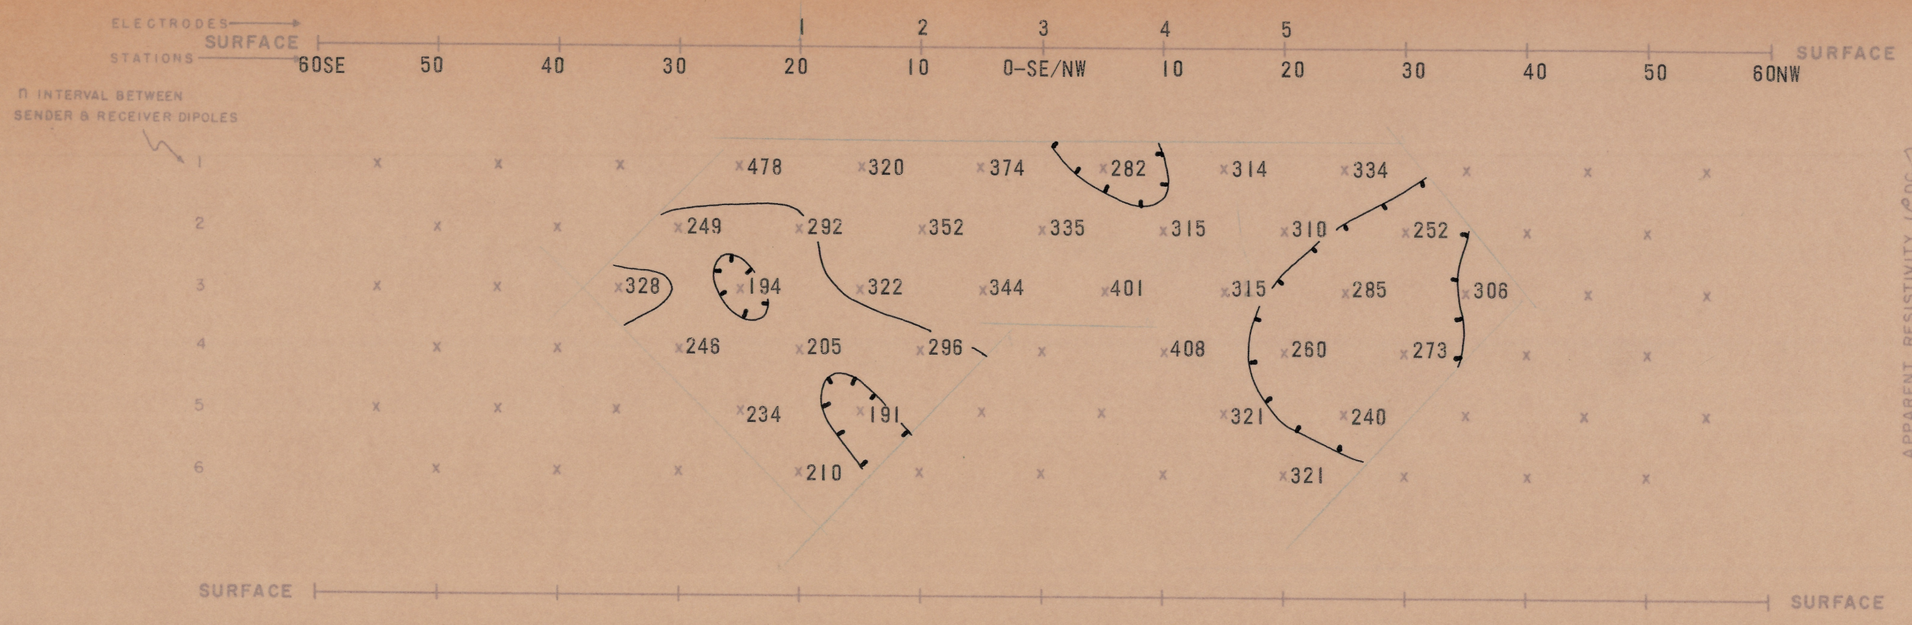

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.

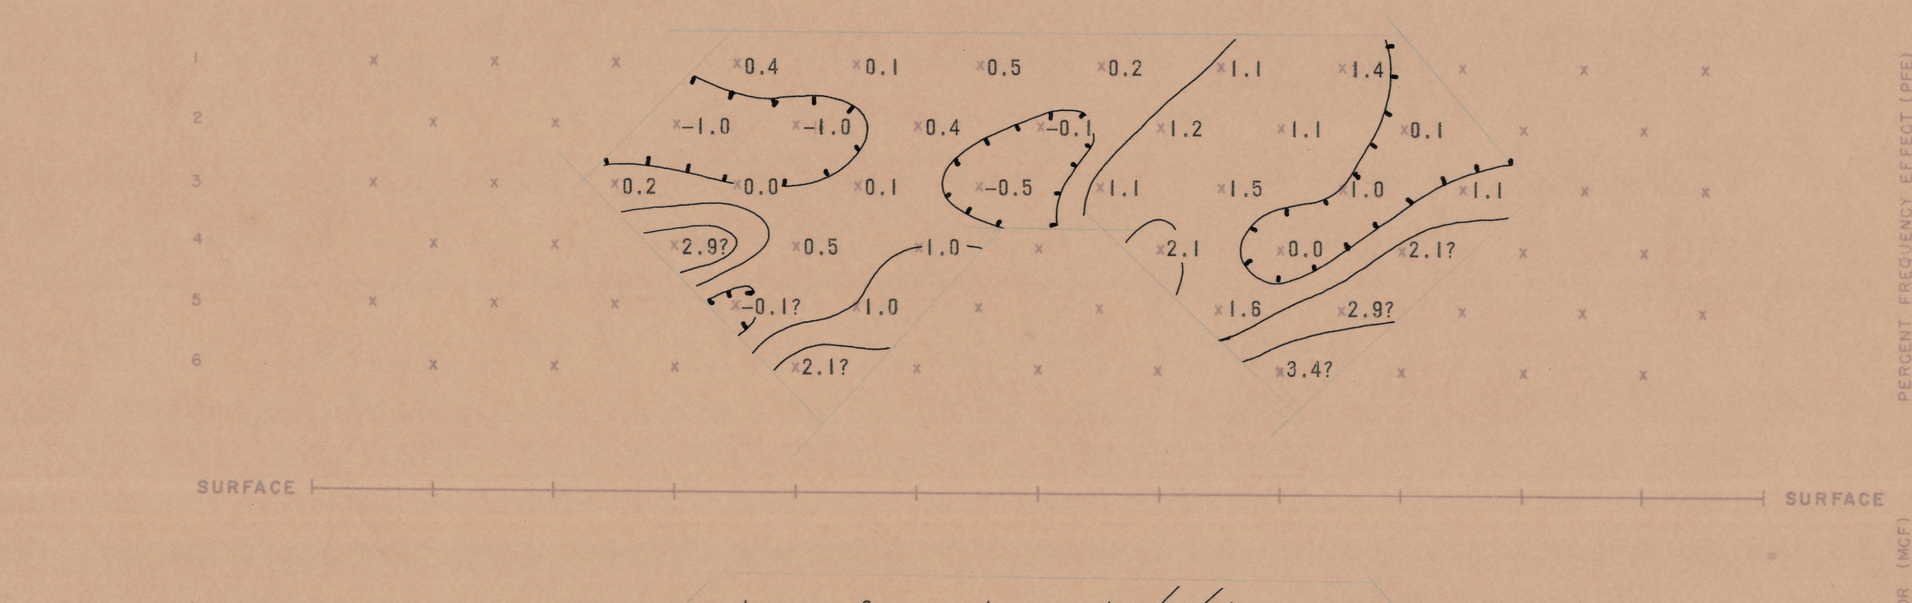

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

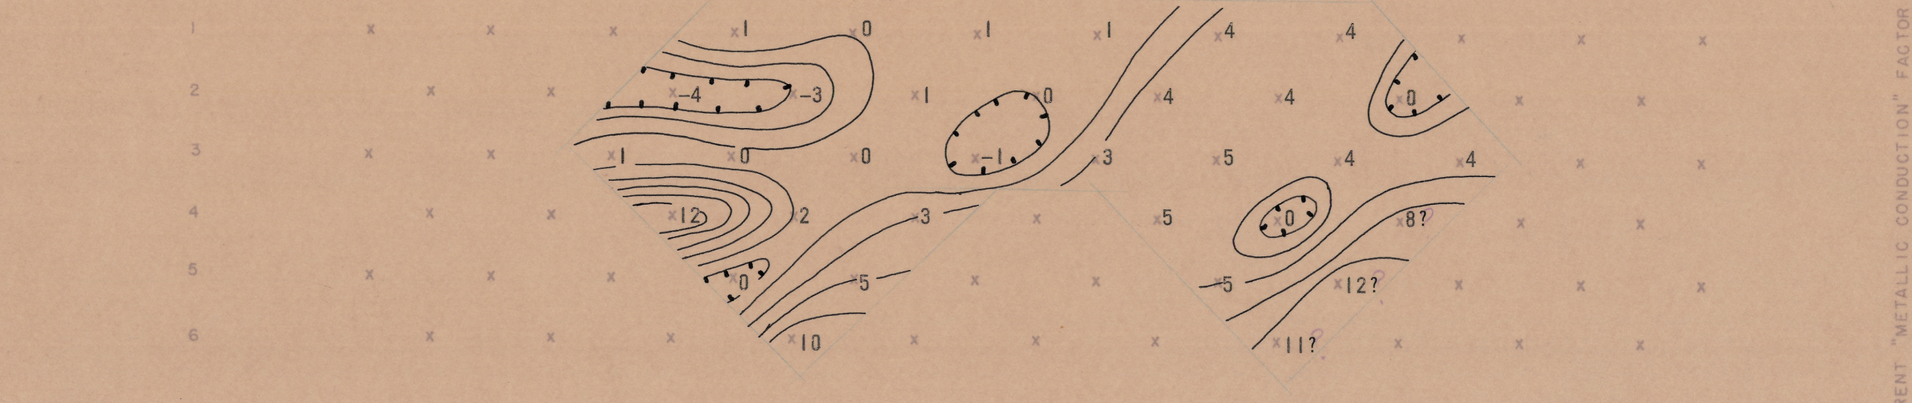

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)

$$\left(MCF = \frac{PFE \times 1000}{\rho_{DC}}\right)$$

CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

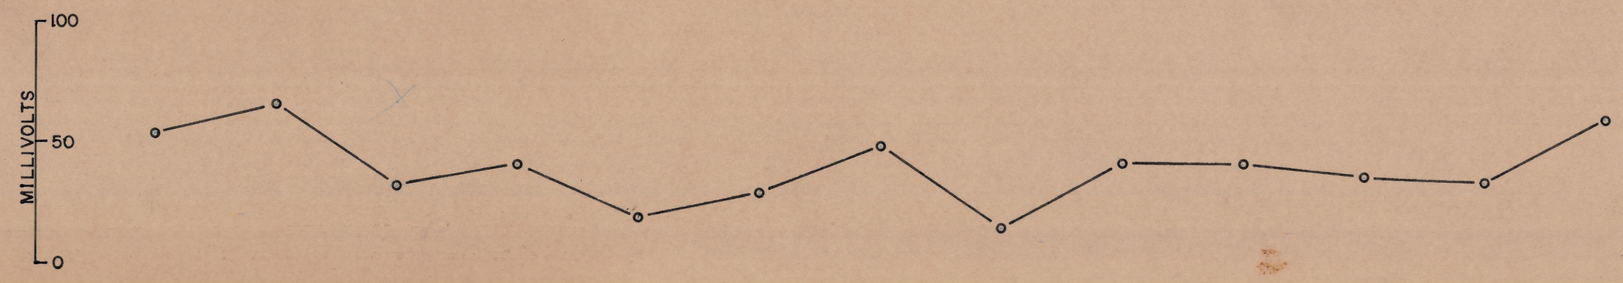

EXPLANATION

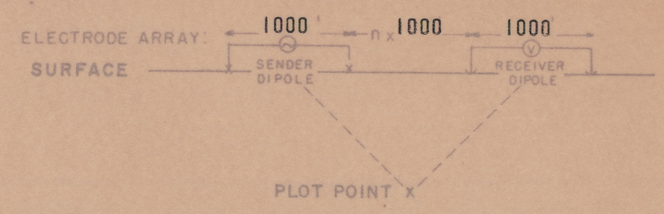

RELATIVE ANOMALY STRENGTH

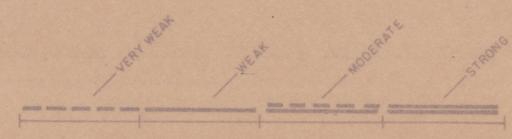

LOOKING S 70° W

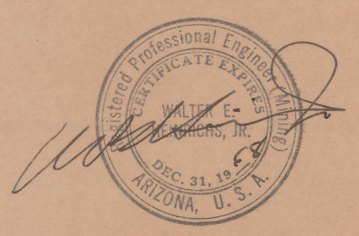

VEKOL MINE AREA

SECTIONAL DATA SHEET

LINE NO. 2 (SPREAD 1)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: NOV 1968

FOR

GUNNEX LIMITED

HEINRICHS
GEOEXPLORATION COMPANY
POST OFFICE BOX 5671, TUCSON, ARIZONA, 85703
Phone: 602/623-0578 Cable: GEOEX, Tucson
geophysical engineers
vancouver
sydney