



APPARENT RESISTIVITY (ρ_a)
IN UNITS OF OHM FEET (FT)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY 0.05 cps.


EXPLANATION

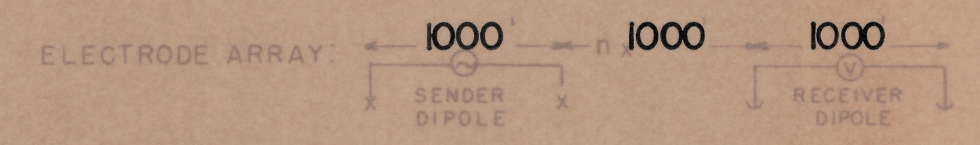


RELATIVE ANOMALY STRENGTH

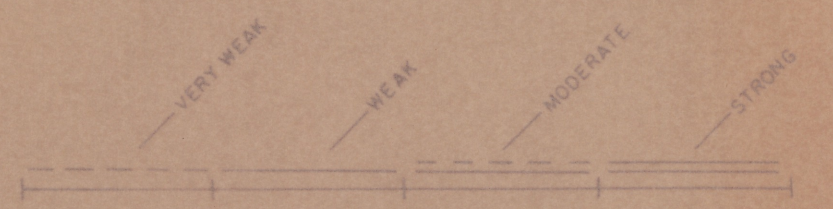

LOOKING N 63° W

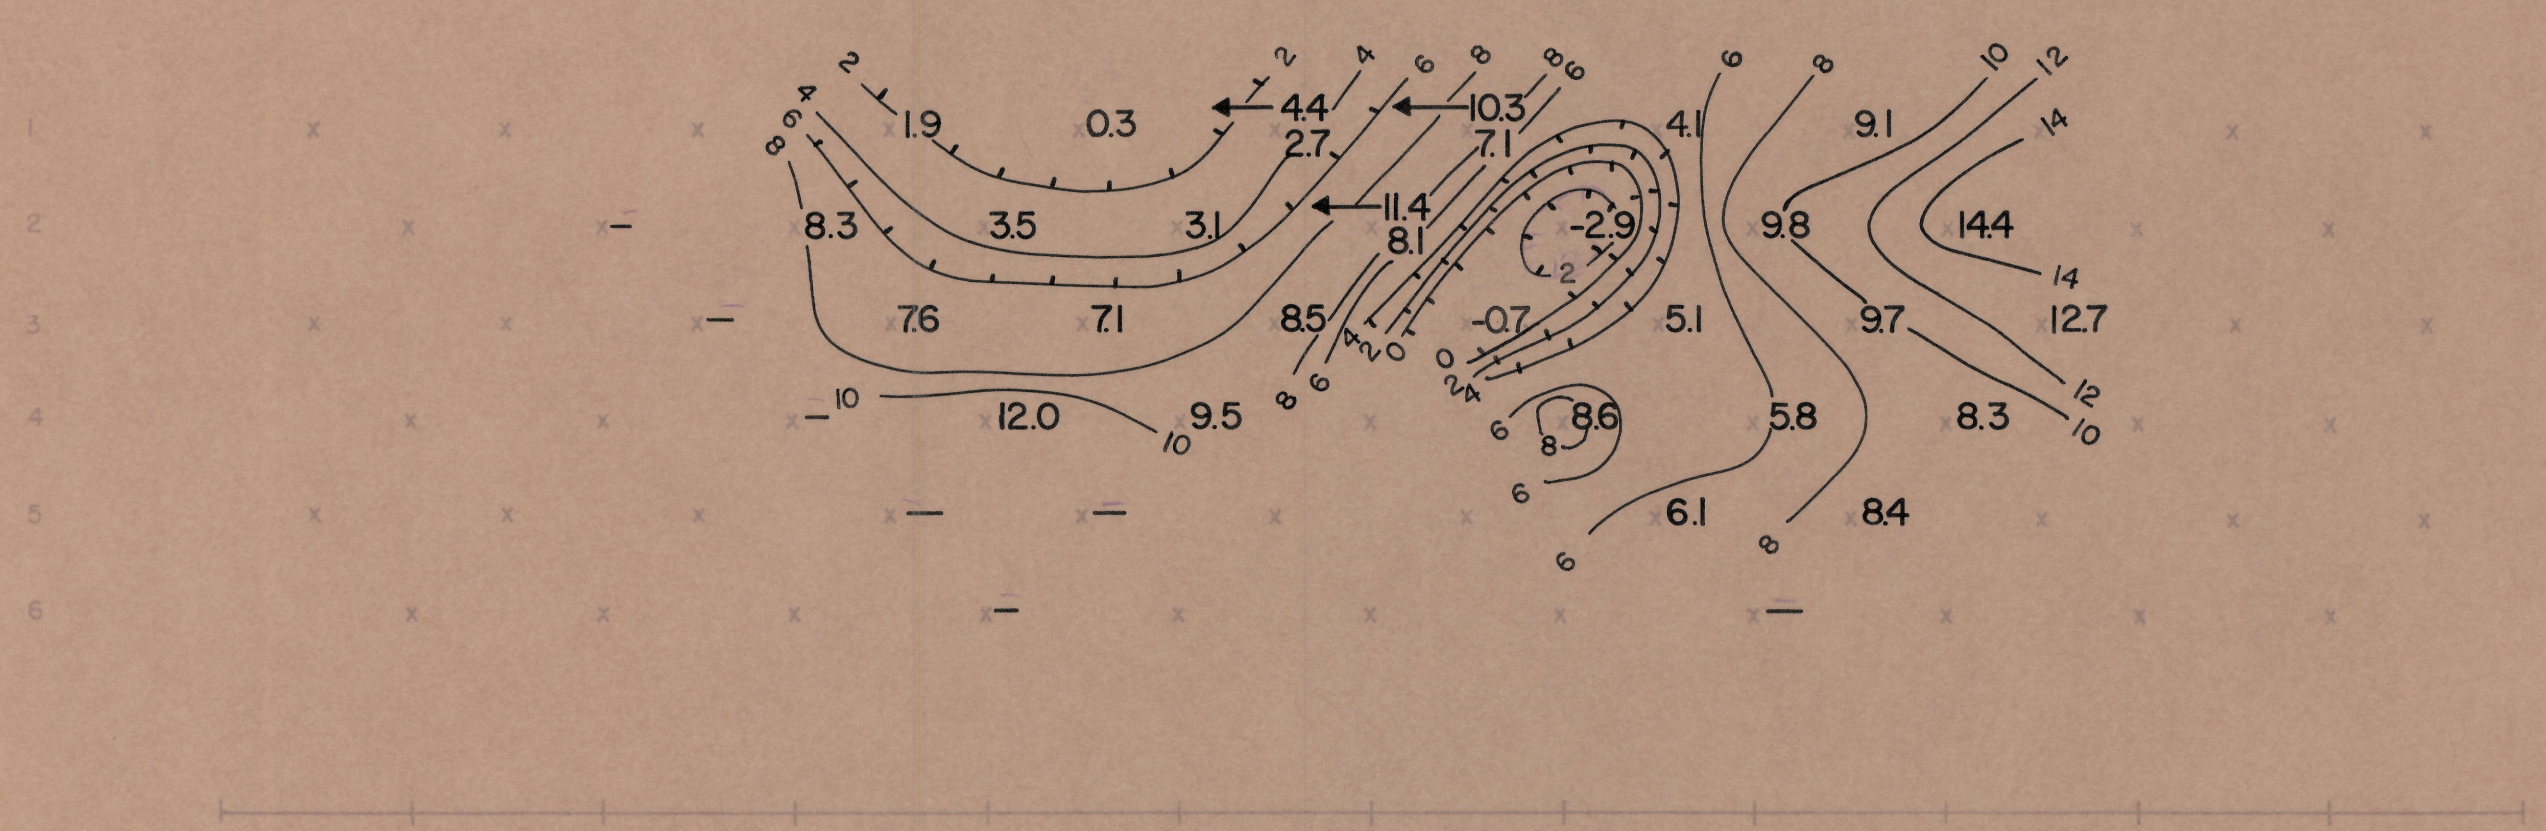

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps.

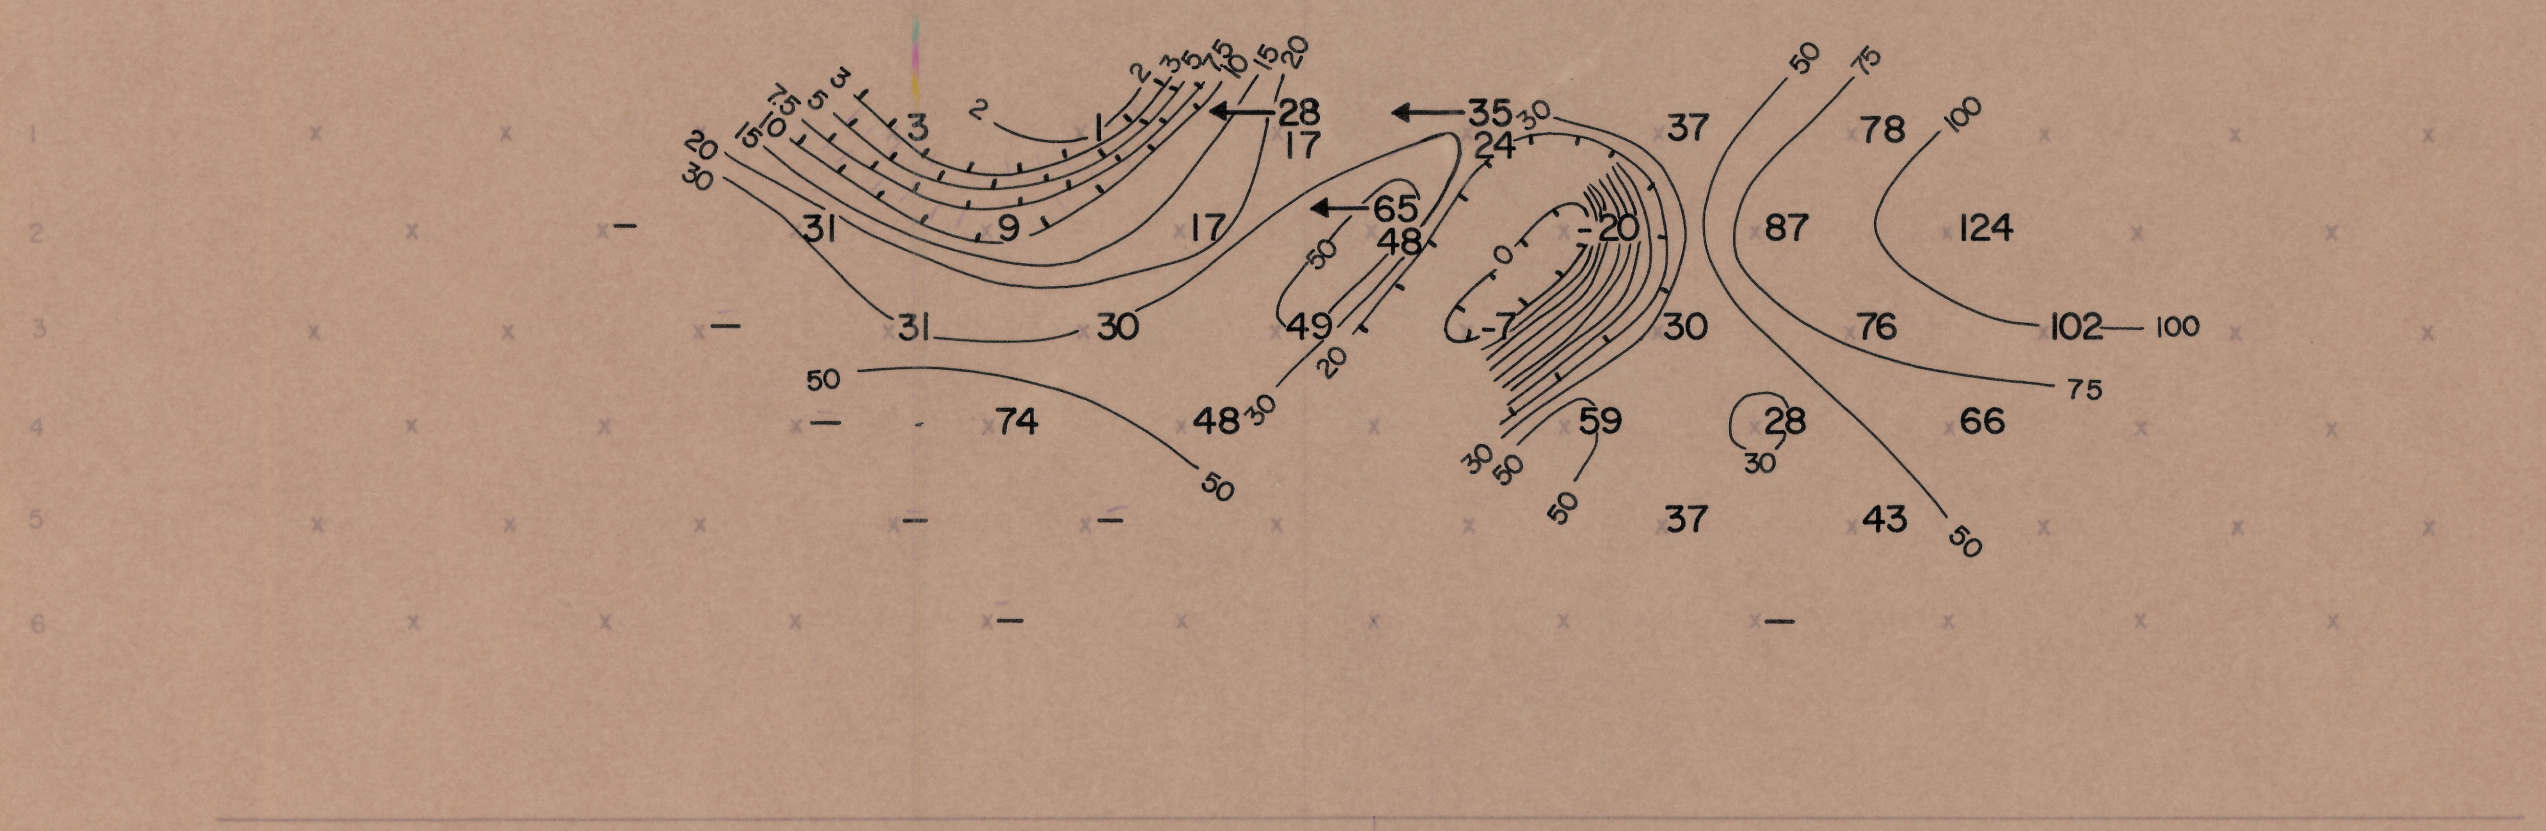

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = \frac{PFE \times 1000}{\rho_a}$)
CONTOUR INTERVAL LOGARITHMIC

SUPERIOR AREA

SECTIONAL DATA SHEET

LINE NO. 84 E

INDUCED POLARIZATION TRAVERSE

HEINRICH'S GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JUNE 1966

FOR

GUNNEX LTD.

SELF POTENTIAL



CO-10-100-10-107 H.F. 80 JUN 1966