



APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps.


EXPLANATION

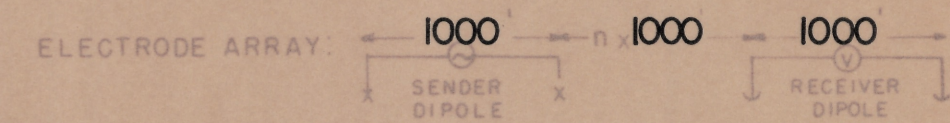


RELATIVE ANOMALY STRENGTH

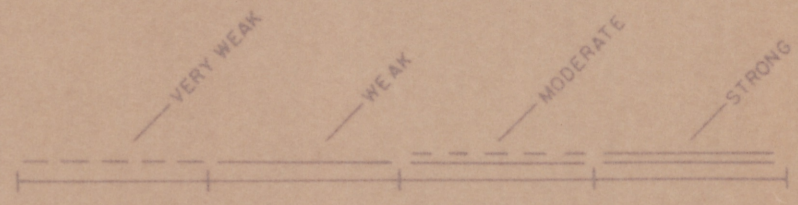

LOOKING N 10° W

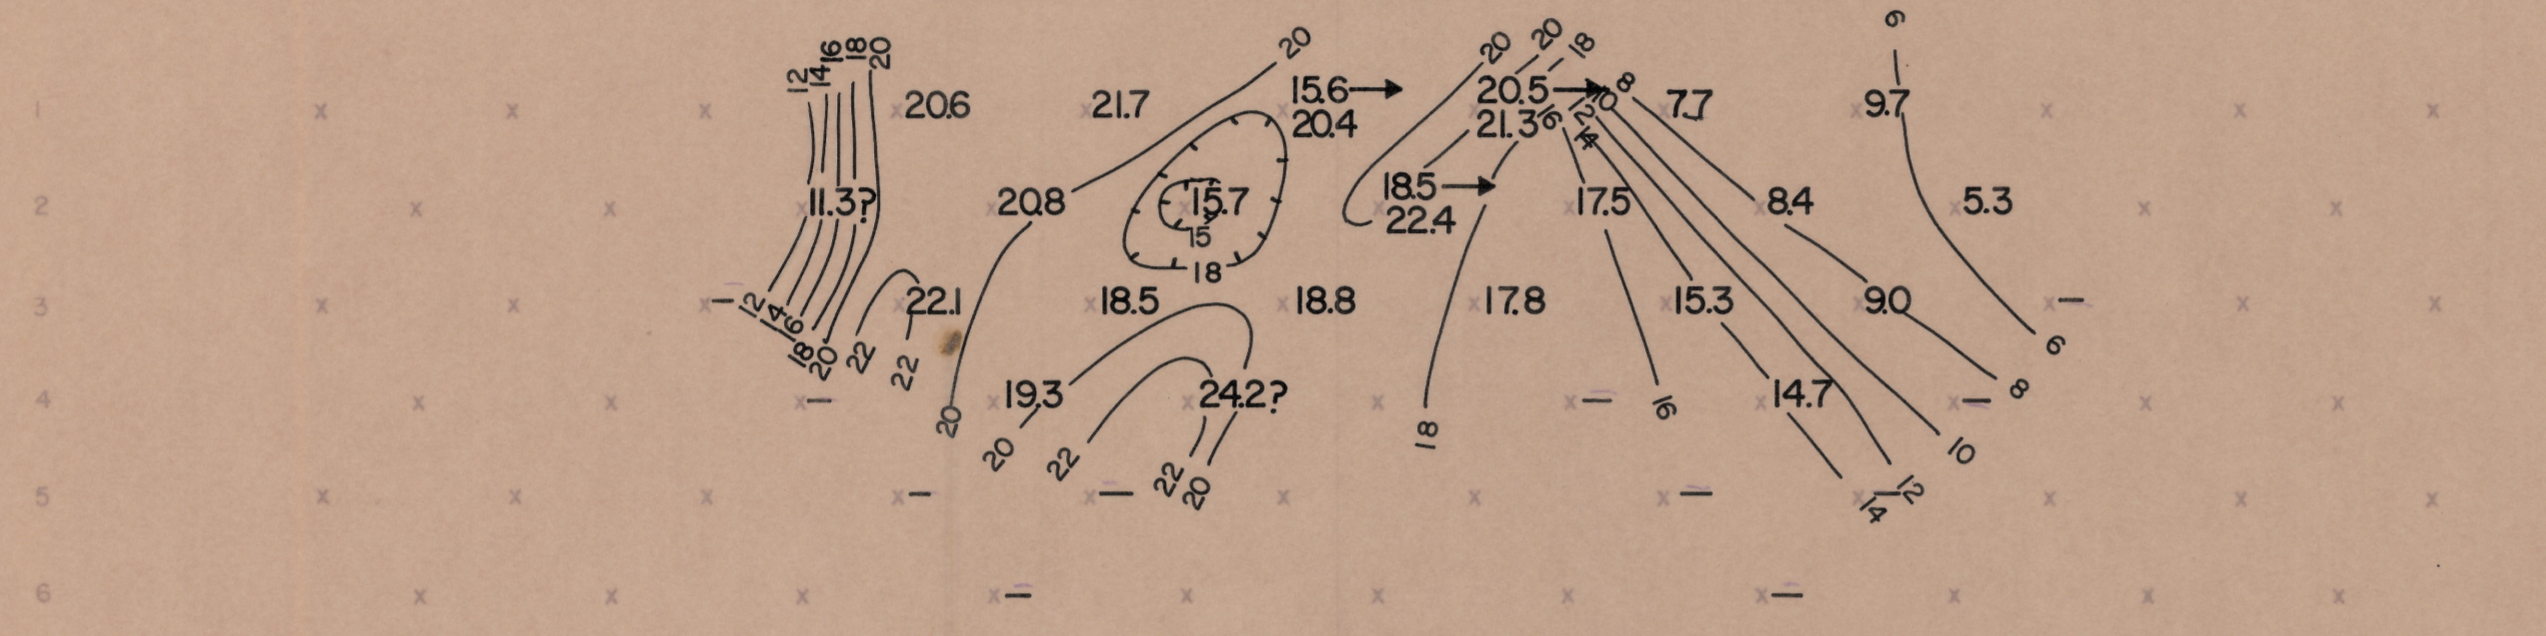

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps.

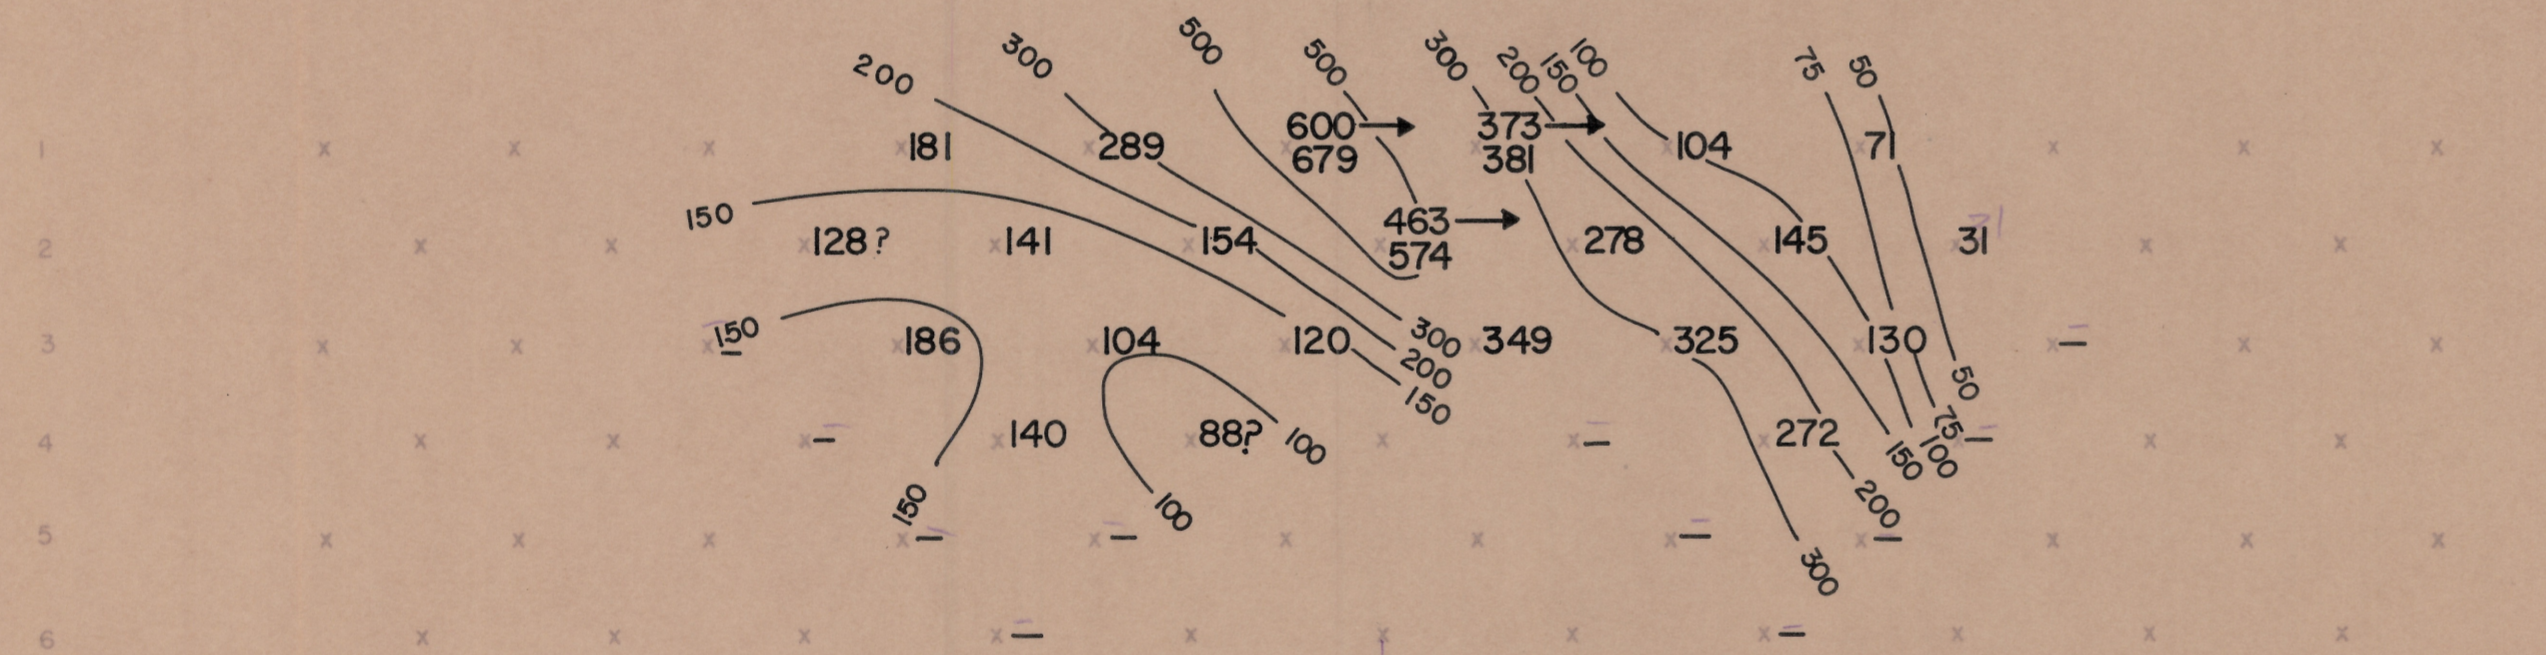

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
 $(MCF = \frac{PFE \times 1000}{\rho_{DC}})$   
CONTOUR INTERVAL LOGARITHMIC

SUPERIOR AREA  
SECTIONAL DATA SHEET  
LINE NO. D-1  
INDUCED POLARIZATION TRAVERSE  
HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1" = 1000' DATE: JUNE 1966  
FOR  
GUNNEX LTD.



SELF POTENTIAL



3246-100-10-100 W/S 98 henrichs