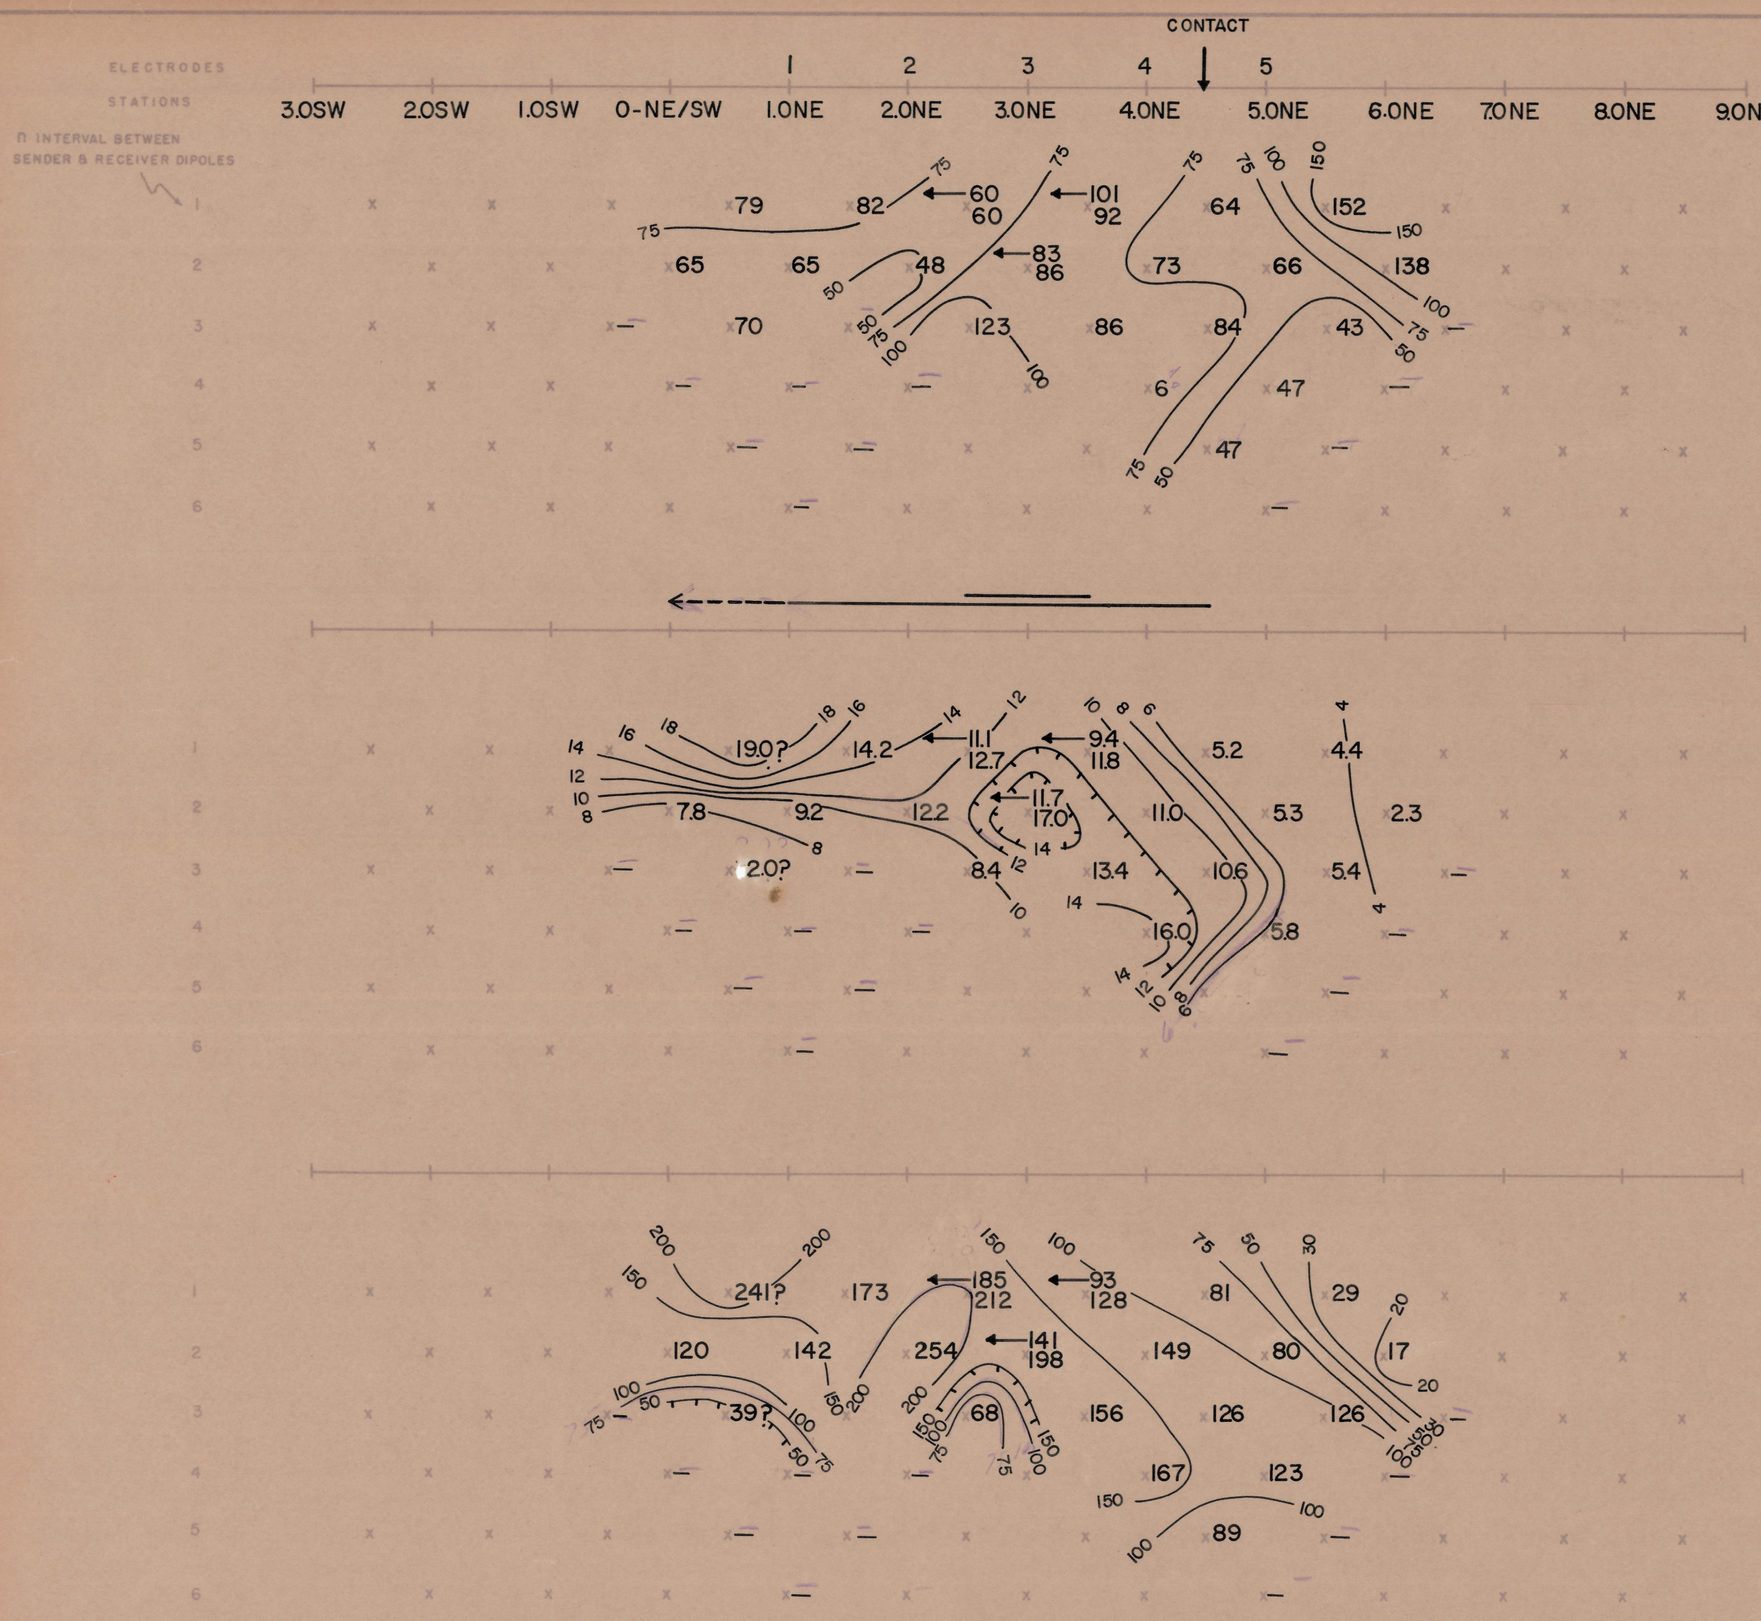

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$\left(MCF = \frac{PFE \times 1000}{\rho_{DC} 2\pi}\right)$
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

ELECTRODE ARRAY: 1000 — n — 1000 — 1000
SENDER DIPOLE — RECEIVER DIPOLE

RELATIVE ANOMALY STRENGTH

VERY WEAK — WEAK — MODERATE — STRONG

LOOKING N 45°W

SELF POTENTIAL

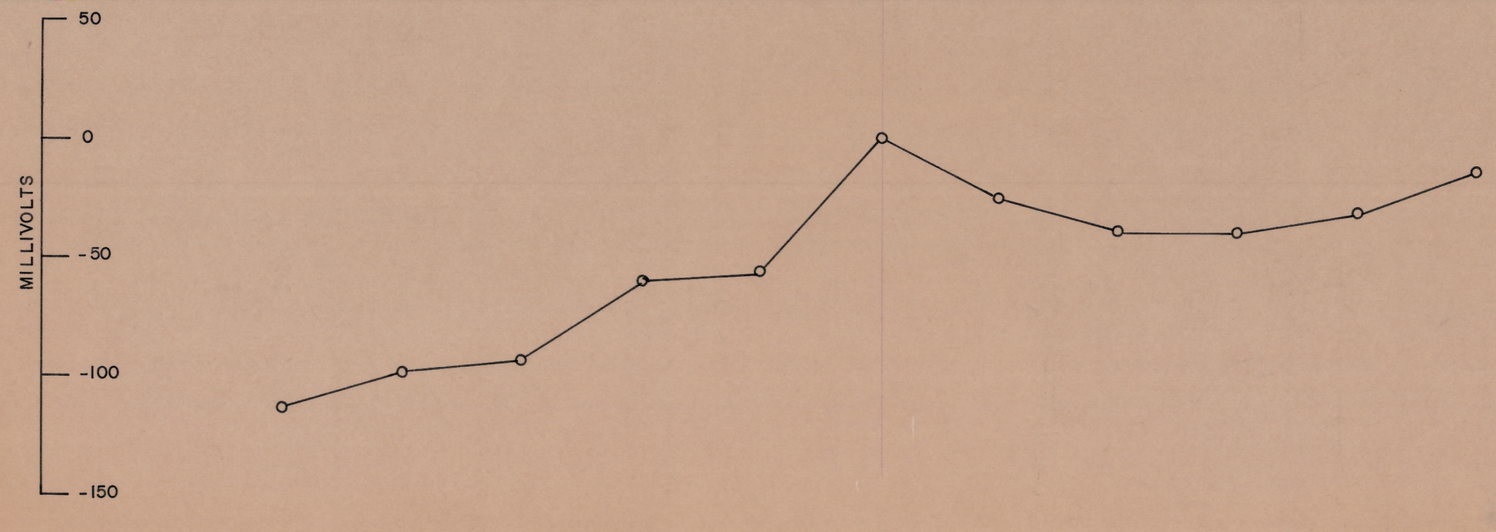

SUPERIOR AREA

SECTIONAL DATA SHEET
LINE NO. 54 E
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1"= 1000' DATE: JUNE 1966

FOR

GUNNEX LTD.