



EXPLANATION

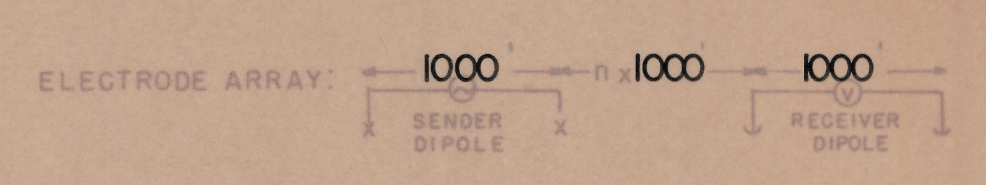

APPARENT RESISTIVITY ($\rho_{DS}/2t$)
IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 cps.

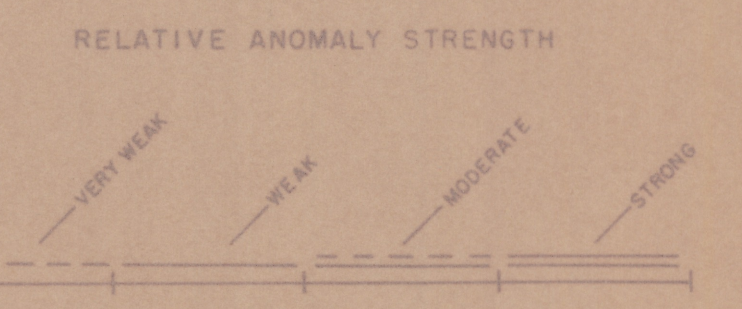

LOOKING N 45° W

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 cps

SUPERIOR AREA

SECTIONAL DATA SHEET

LINE NO. 0

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JUNE 1966

FOR

GUNNEX LTD.

SELF POTENTIAL



6040-150-10-15 H/C 98 20000337