



EXPLANATION

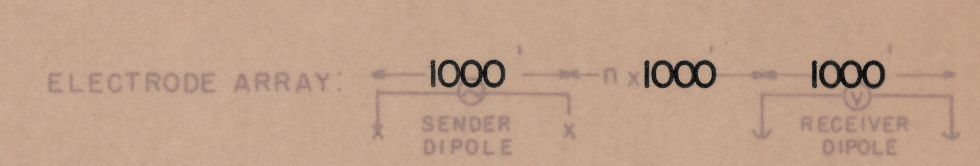

APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET (FT)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

RELATIVE ANOMALY STRENGTH

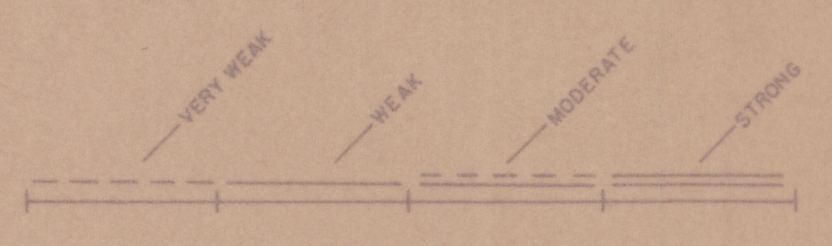

LOOKING N 45° W

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

SUPERIOR AREA

SECTIONAL DATA SHEET

LINE NO. 30 E

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY


SCALE: 1" = 1000' DATE: MAY 1966

FOR

GUNNEX LTD.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $(MCF = \frac{PFE \times 1000}{\rho_a})$
 CONTOUR INTERVAL LOGARITHMIC

SELF-POTENTIAL

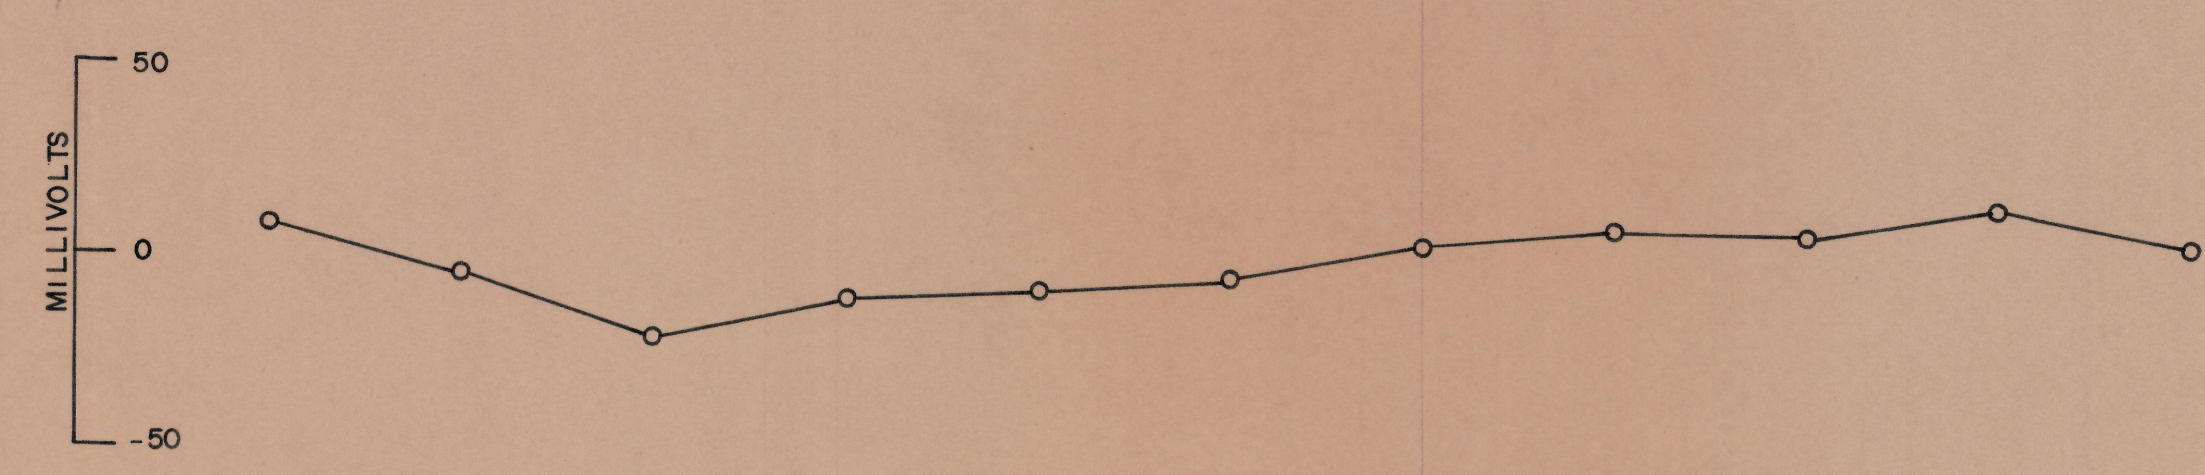

80110-150-40-05 1/4 80 hemmery