

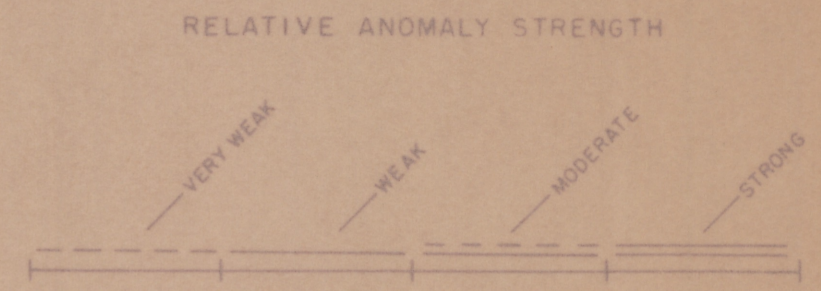



APPARENT RESISTIVITY ($\rho_{0.05}$)
IN UNITS OF OHM FEET (FT)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

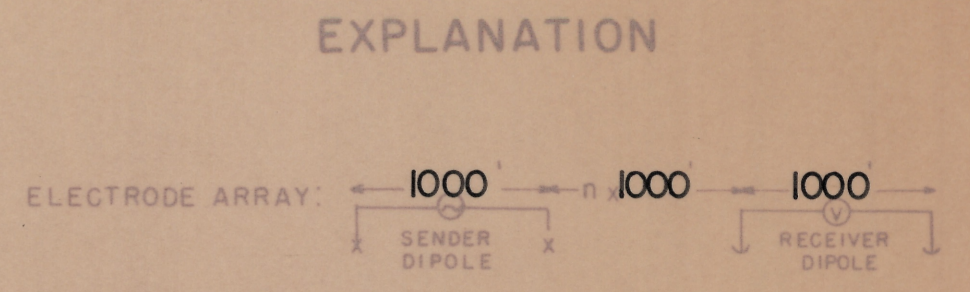

LOOKING N 45° W

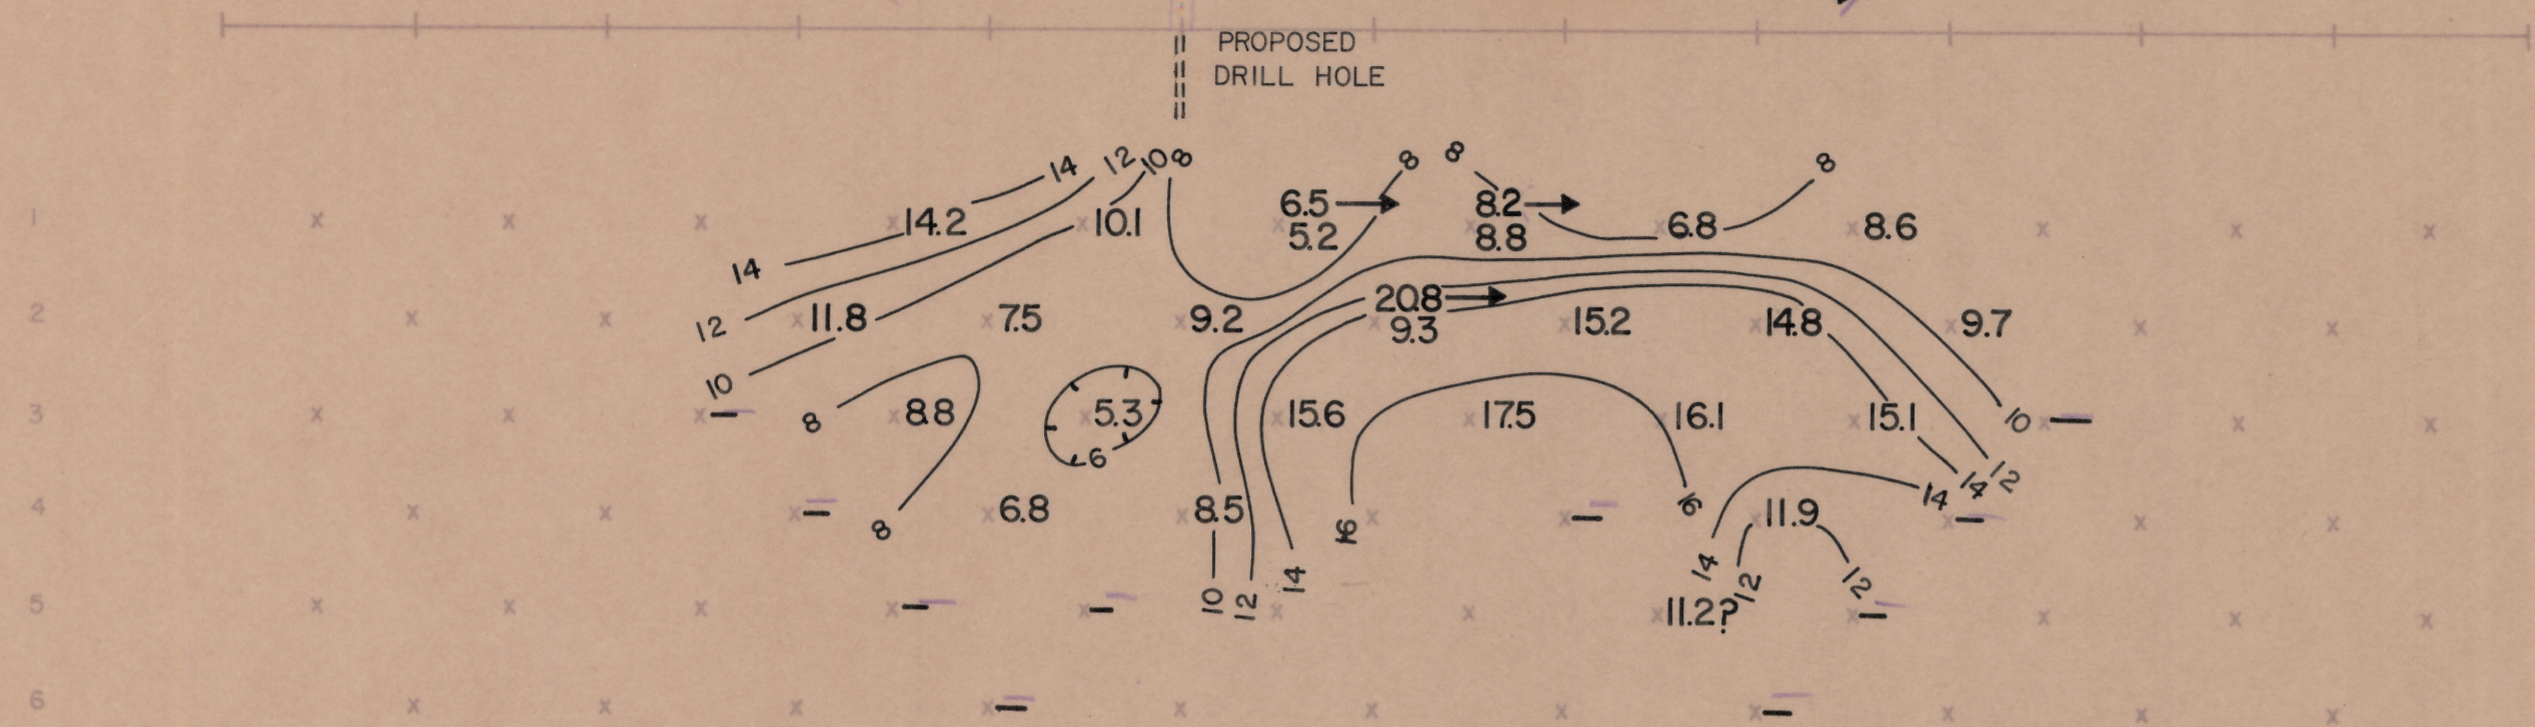

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

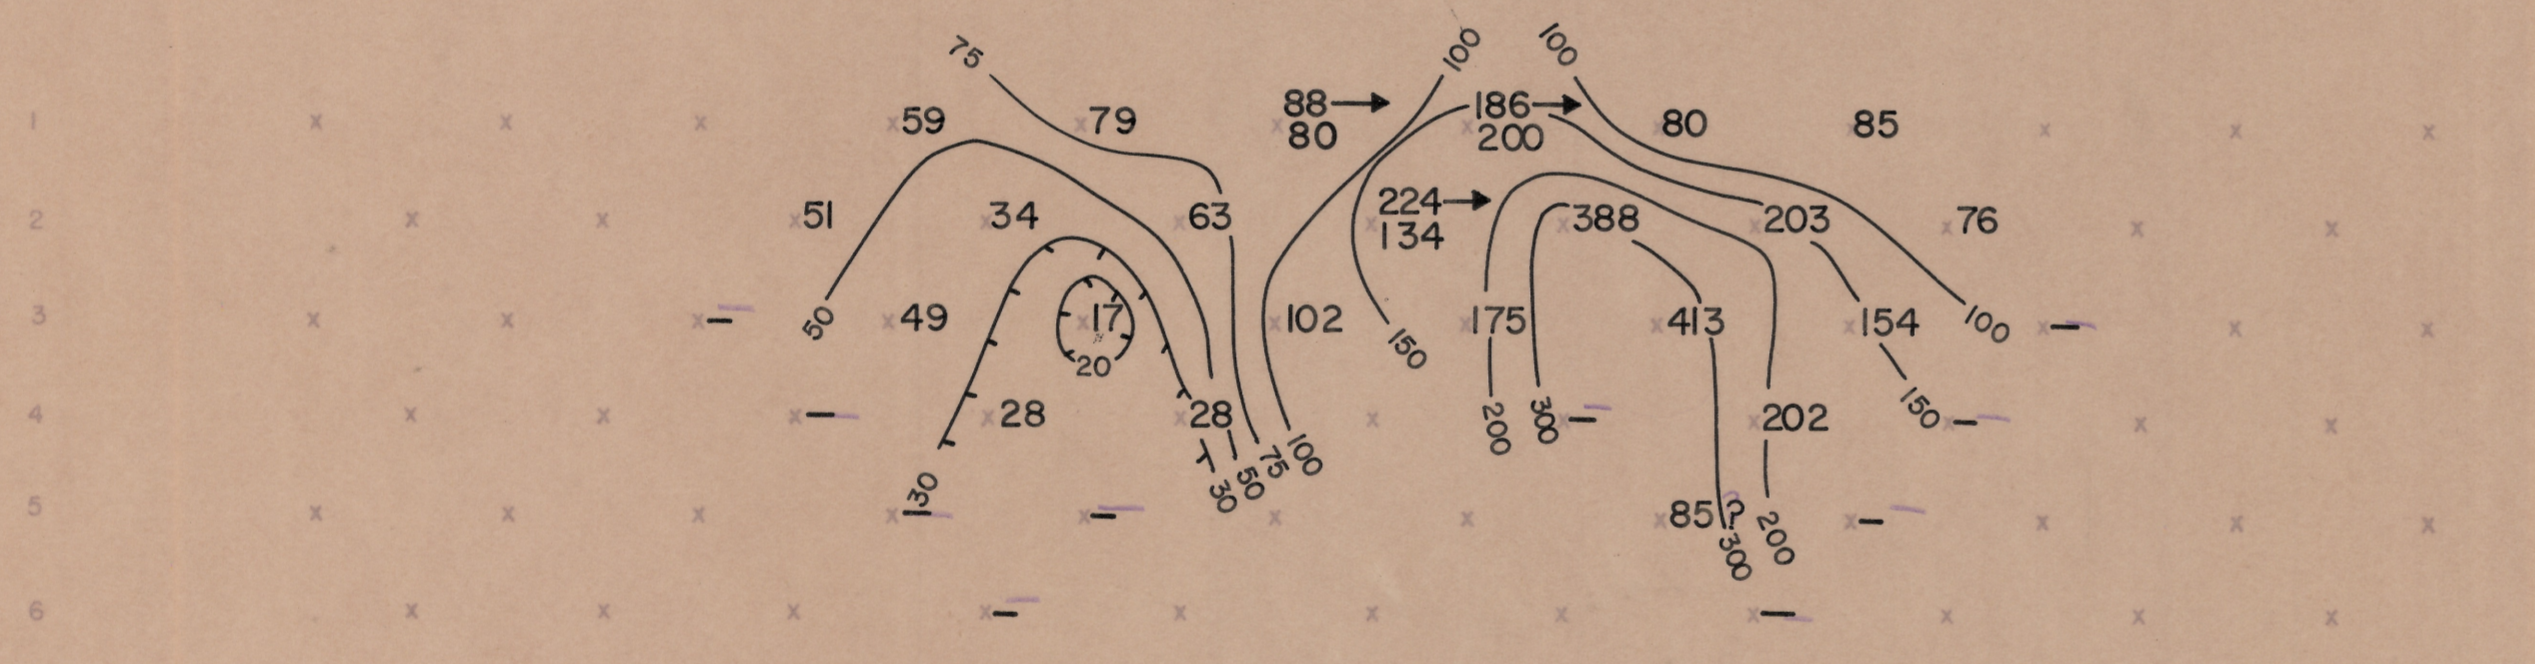

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
($MCF = PFE \times 1000$)
CONTOUR INTERVAL LOGARITHMIC

SUPERIOR AREA

SECTIONAL DATA SHEET

LINE NO. 15 W


INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JUNE 1966

FOR

GUNNEX LTD.

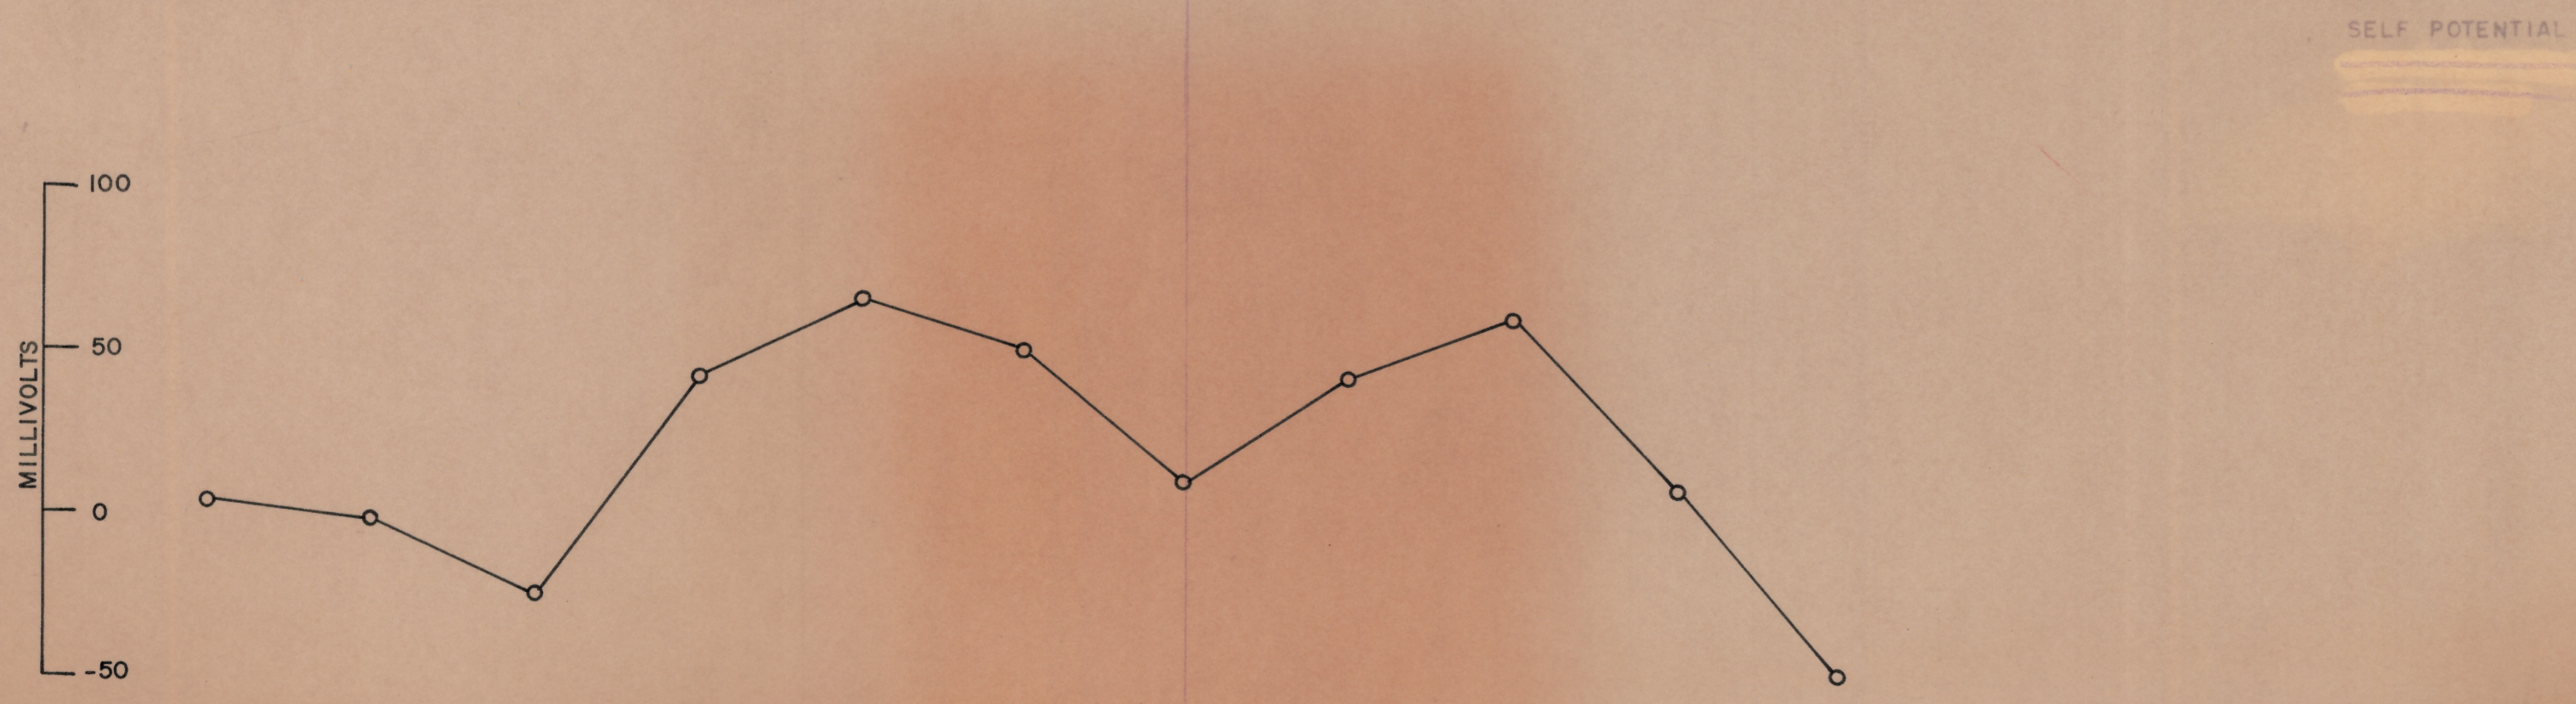

0990-12-10-10 NCS 10/10/66