



ELECTRODE STATIONS SURFACE 30S 25 20 15 10 5 0-N/S 5 10 15 20 25N SURFACE

Interval between sender & receiver dipoles

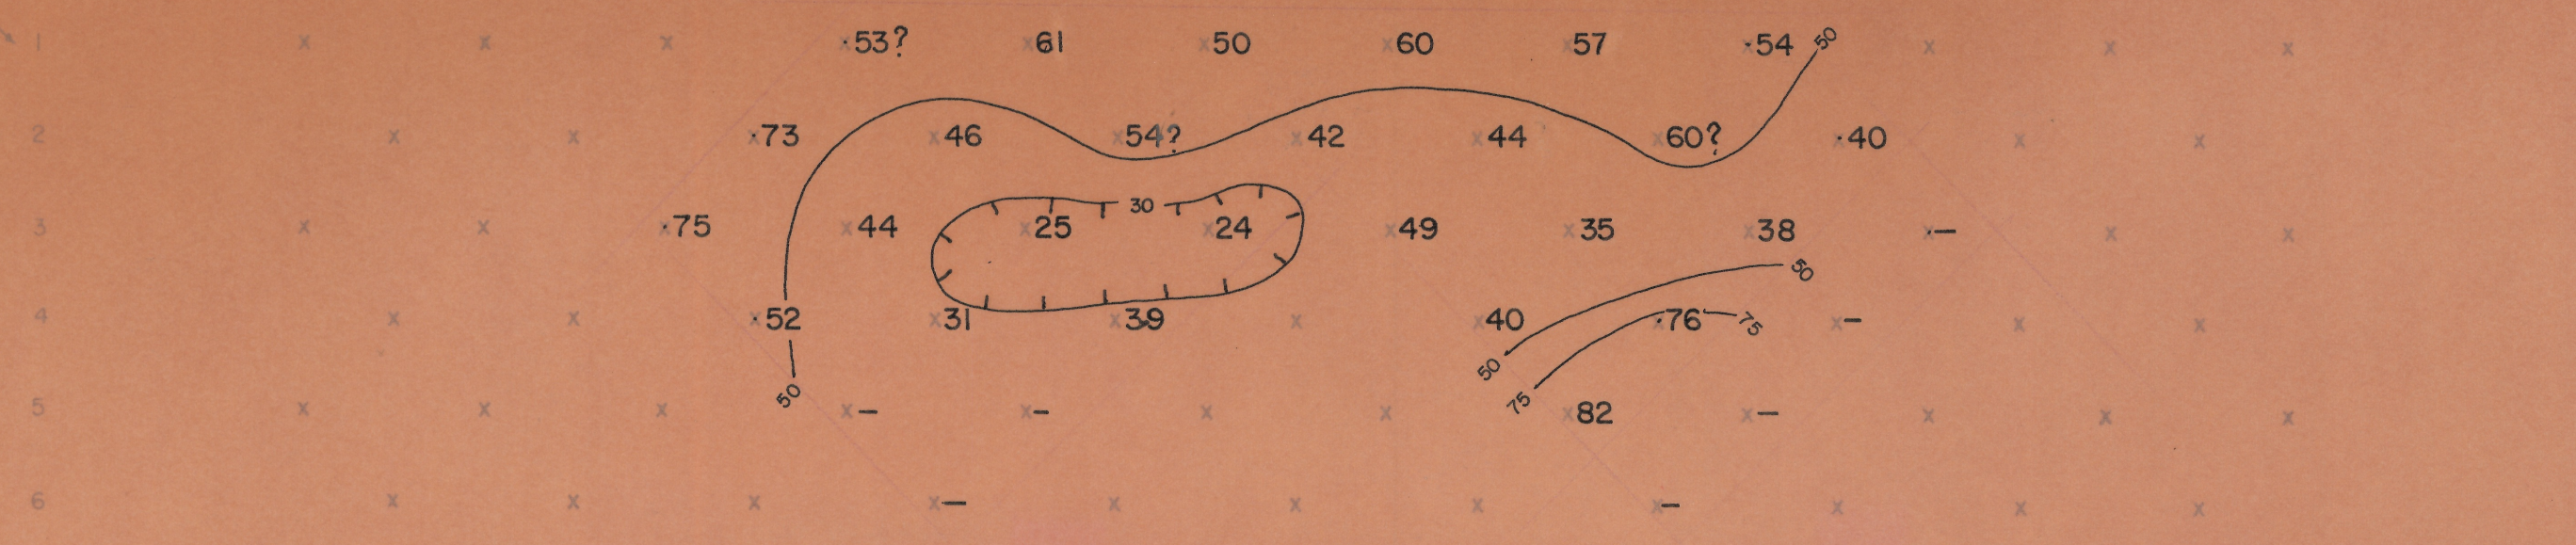


APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 CPS

EXPLANATION

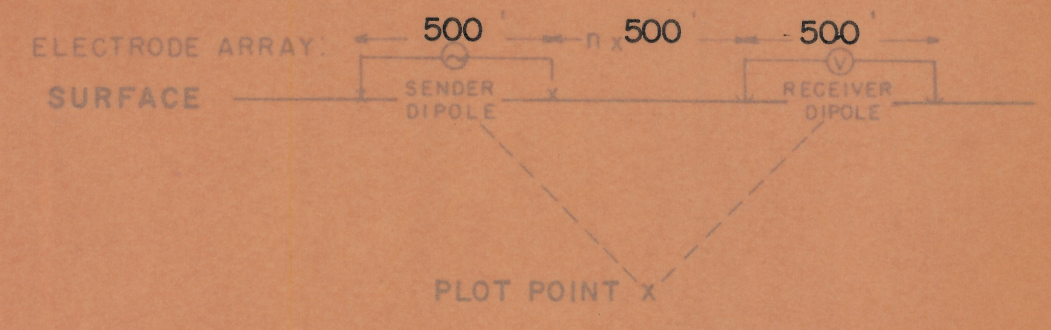


RELATIVE ANOMALY STRENGTH

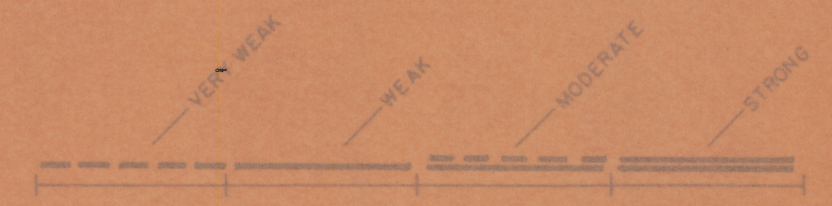


LOOKING WEST

SURFACE SURFACE

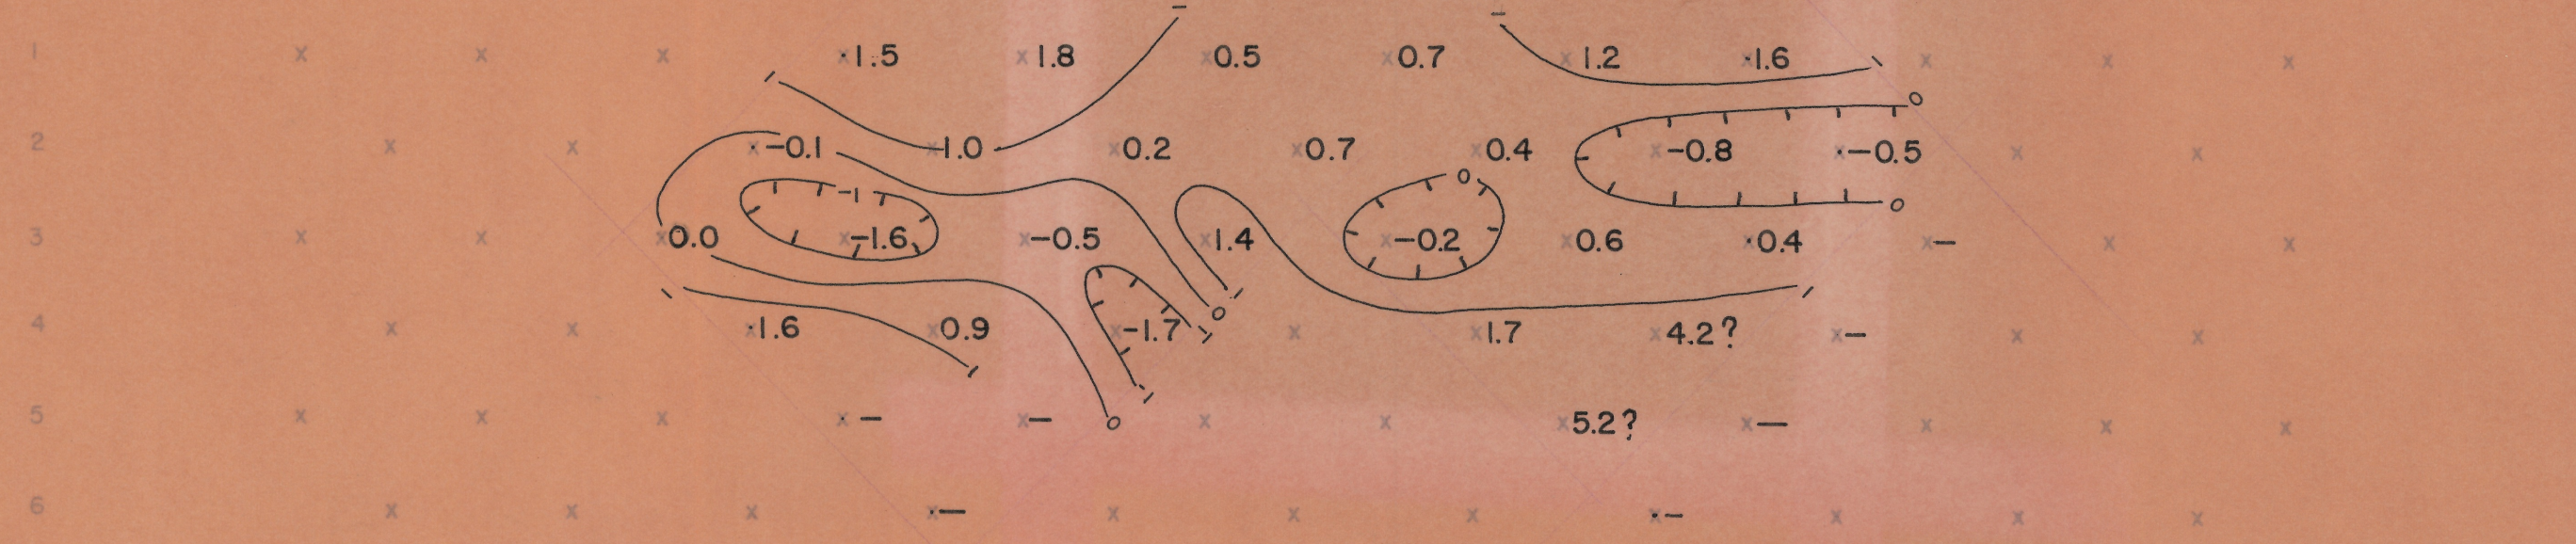

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 CPS

SURFACE SURFACE

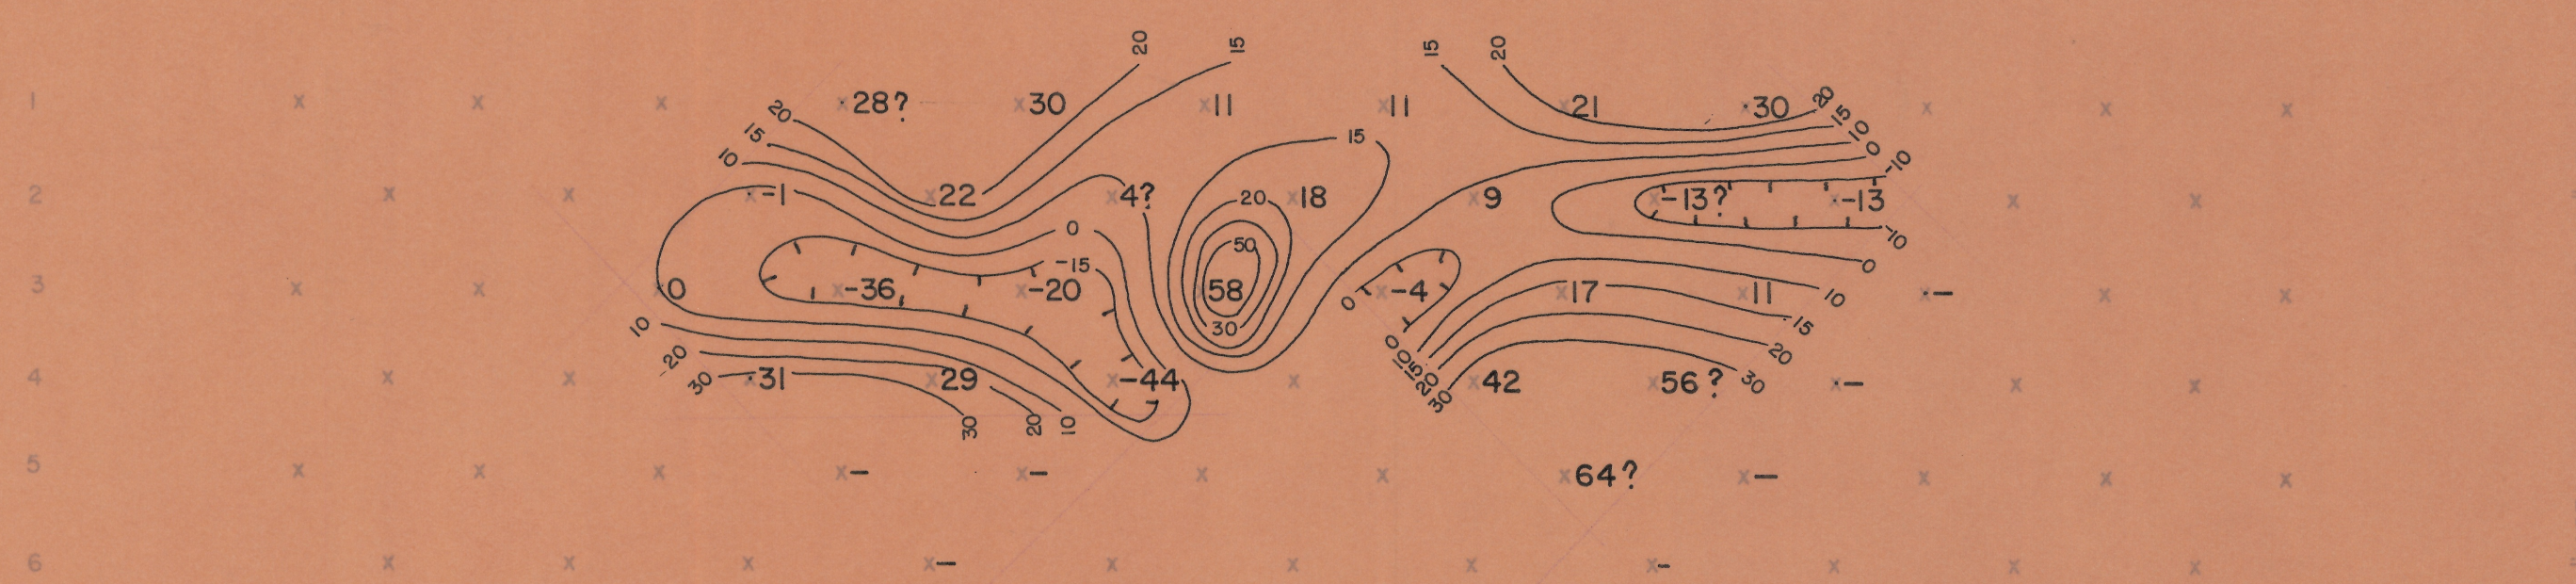

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) IN UNITS OF PEE X 1000
CONTOUR INTERVAL LOGARITHMIC

BRENDA AREA

SECTIONAL DATA SHEET

LINE NO. 1


INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: MAR 1967

FOR GUNNEX LIMITED

SELF POTENTIAL

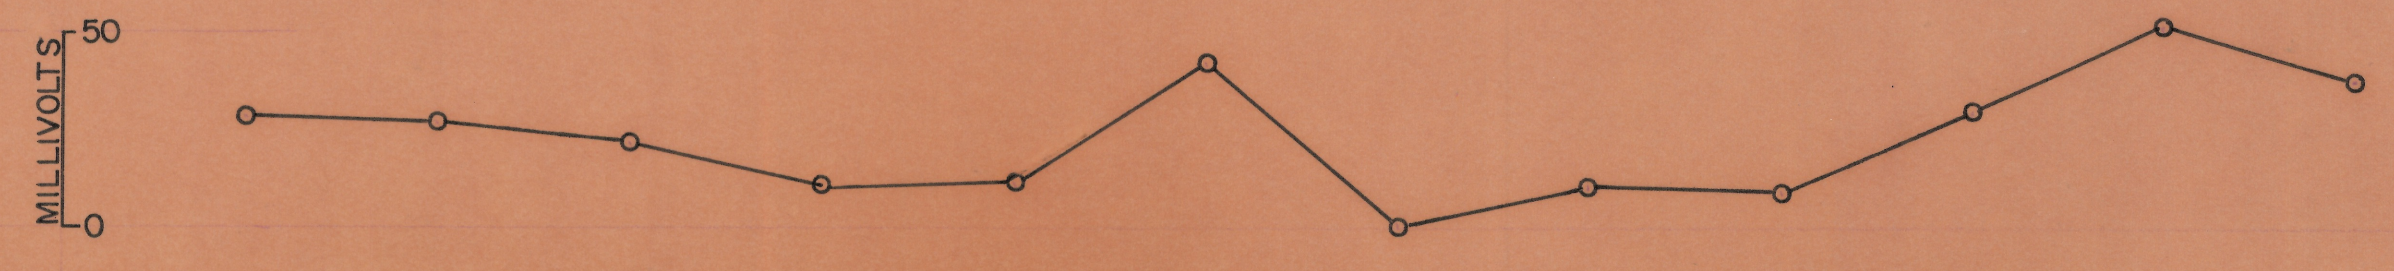

2570-250-10-107 1/15/80