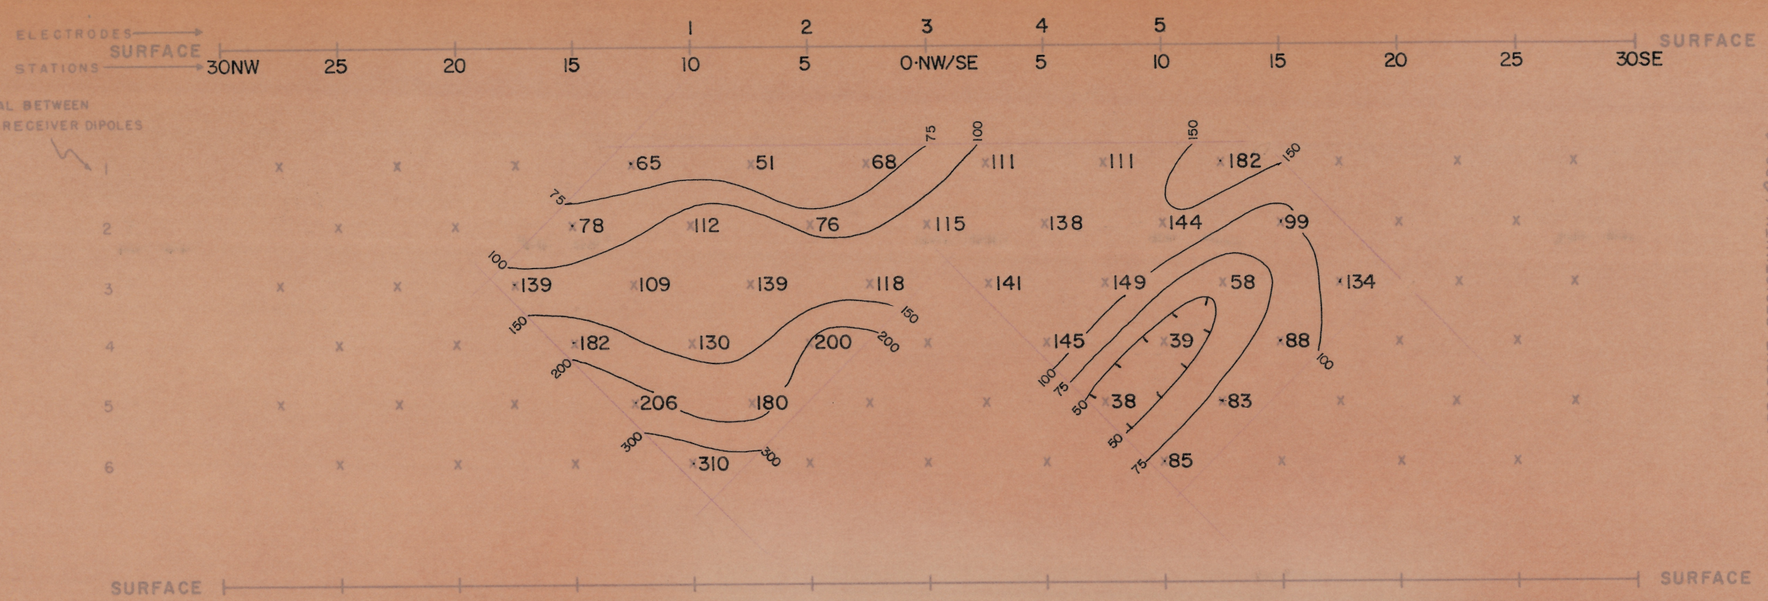

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

EXPLANATION

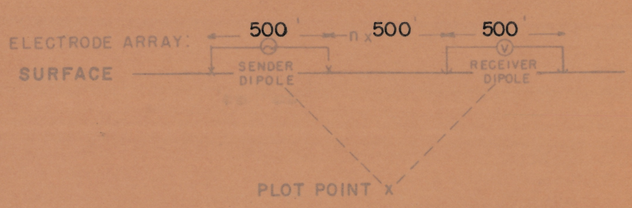

RELATIVE ANOMALY STRENGTH

LOOKING NORTHEASTERLY

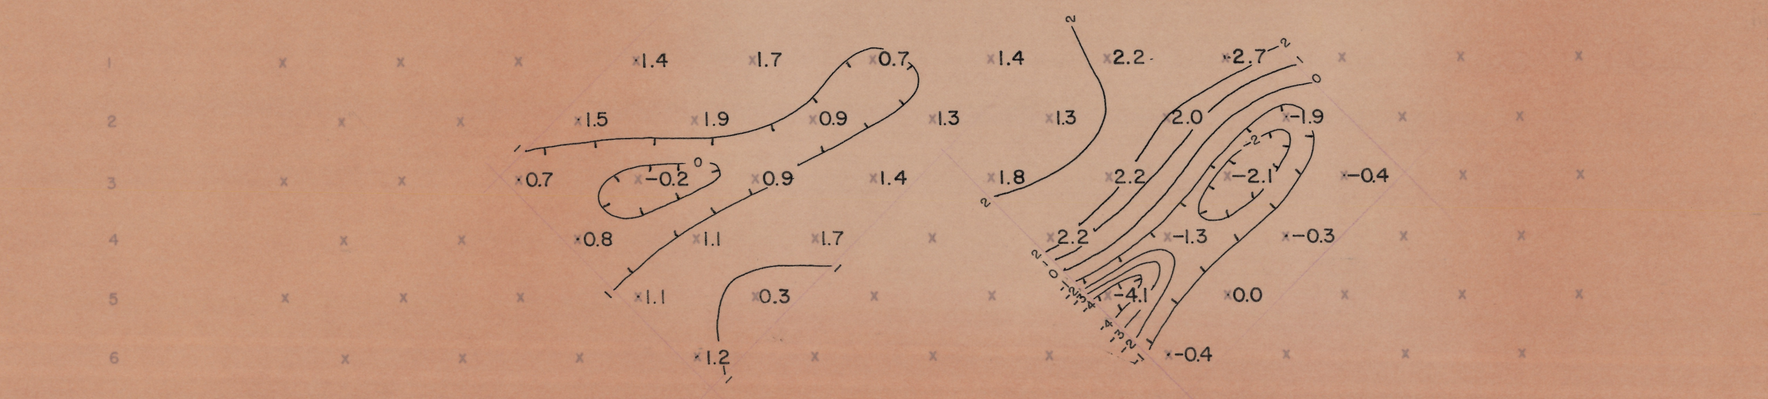

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

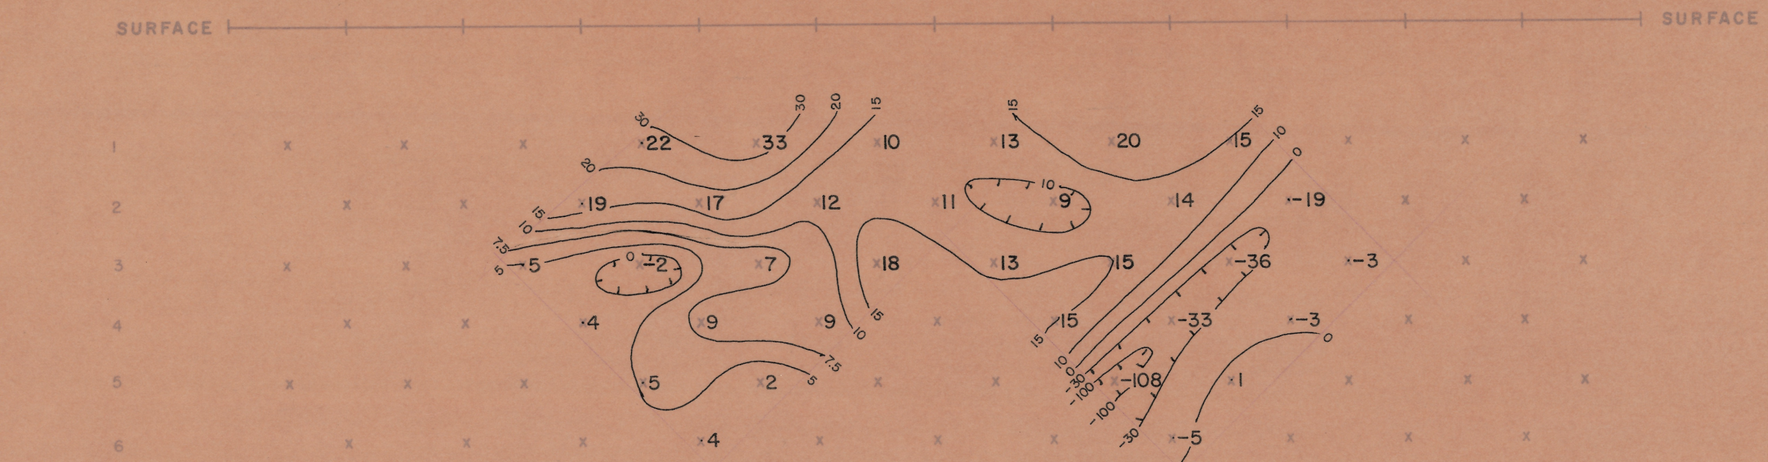

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$\left(MCF = \frac{PFE \times 1000}{\rho DC}\right)$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

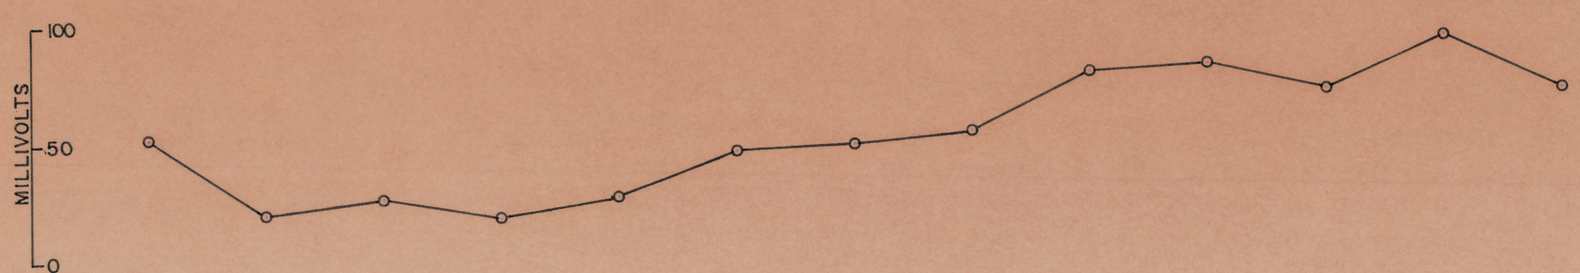

BRENDA AREA

SECTIONAL DATA SHEET

LINE NO. 5

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: APRIL 1967

FOR

GUNNEX LIMITED