



ELECTRODES SURFACE STATIONS 45SW 37.5 30 22.5 15 7.5 0-NE/SW 7.5 15 22.5 30 37.5 45NE SURFACE

DI INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

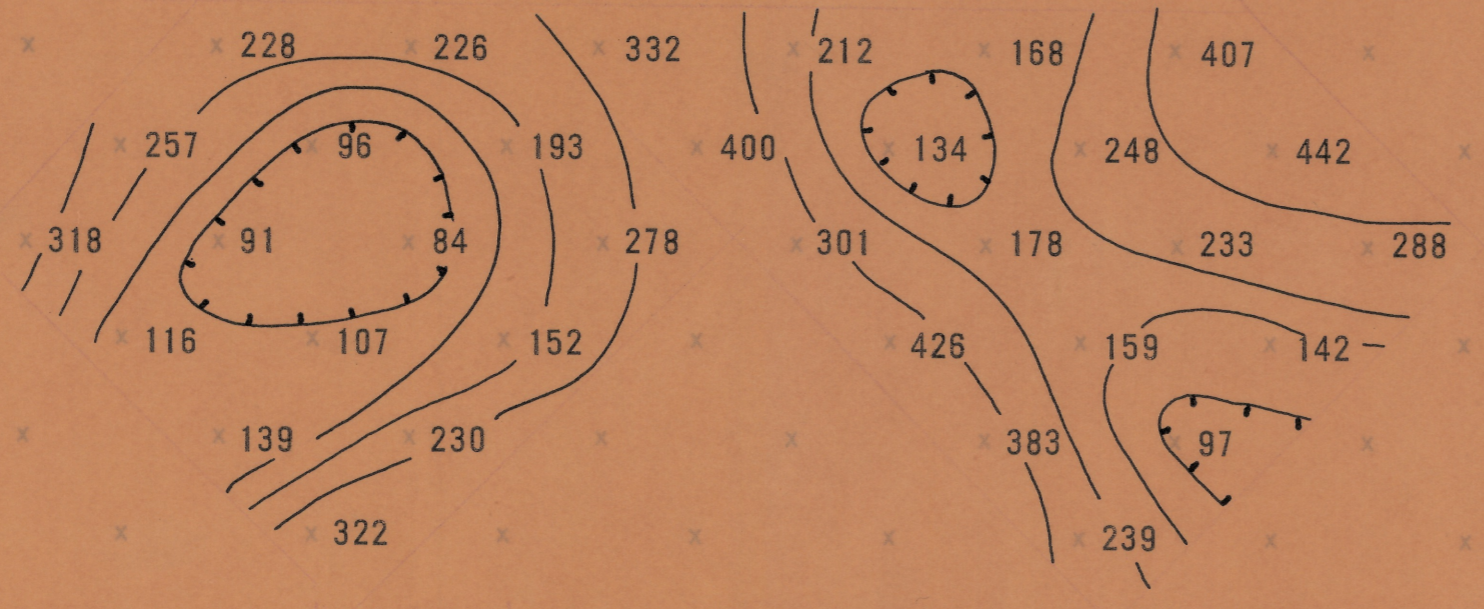


APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM-FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY 0.5 CPS

EXPLANATION

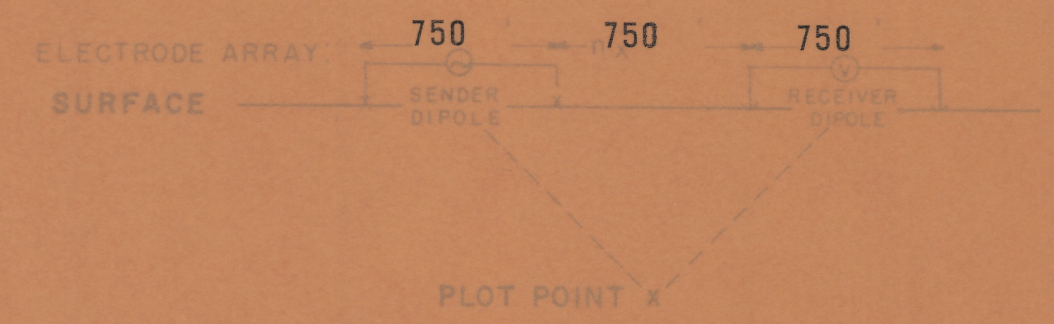


RELATIVE ANOMALY STRENGTH

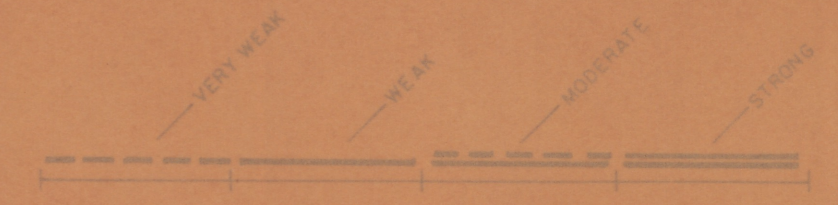


LOOKING N 40° W

SURFACE SURFACE

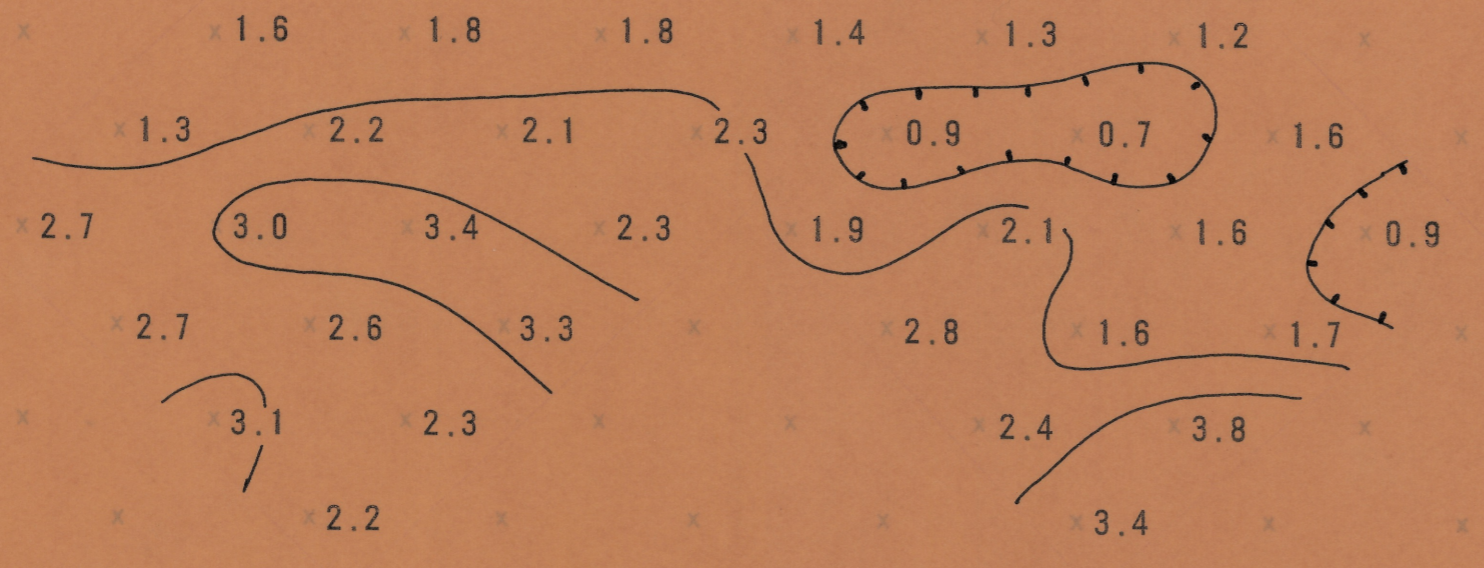

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES 10 TO 30 CPS

SURFACE SURFACE

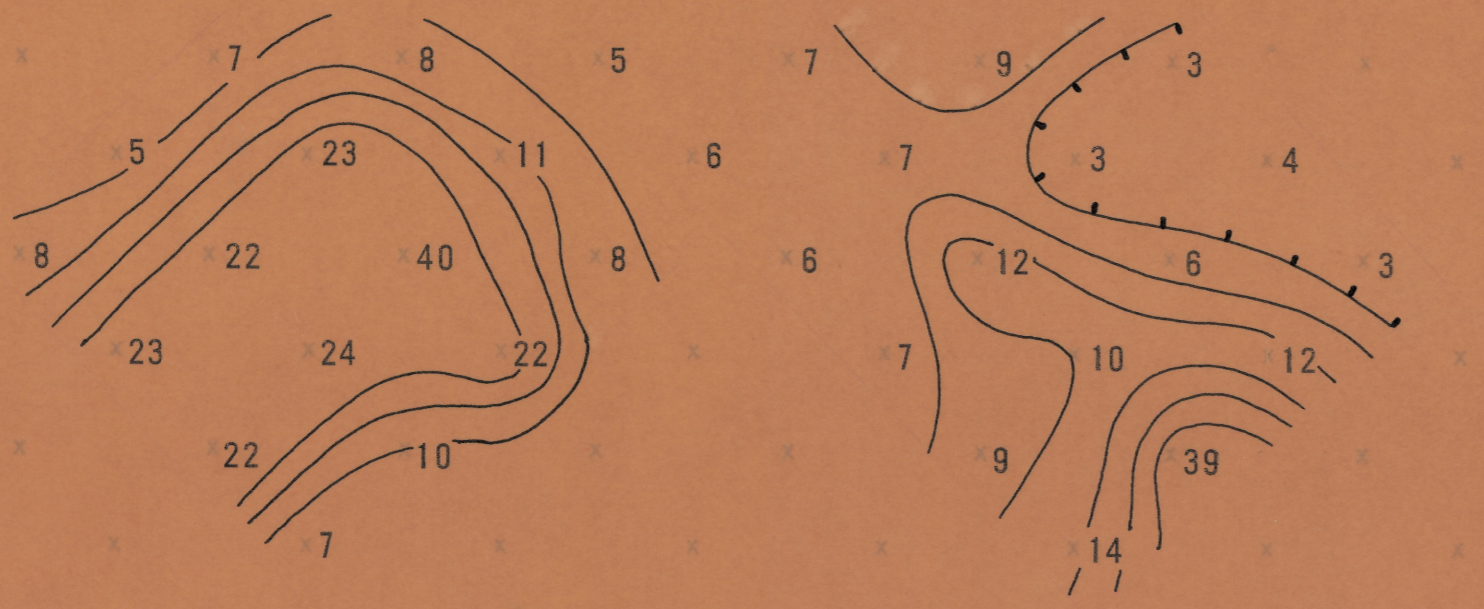

APPARENT METALLIC CONDUCTION FACTOR (AMCF) (MCF x 1000) (MCF x 1000) / (DI x DI)
CONTOUR INTERVAL LOGARITHMIC

DRAGON AREA

SECTIONAL DATA SHEET

LINE NO. 3

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 750' DATE: MARCH 1968

FOR

C F & I STEEL CORPORATION

SELF POTENTIAL

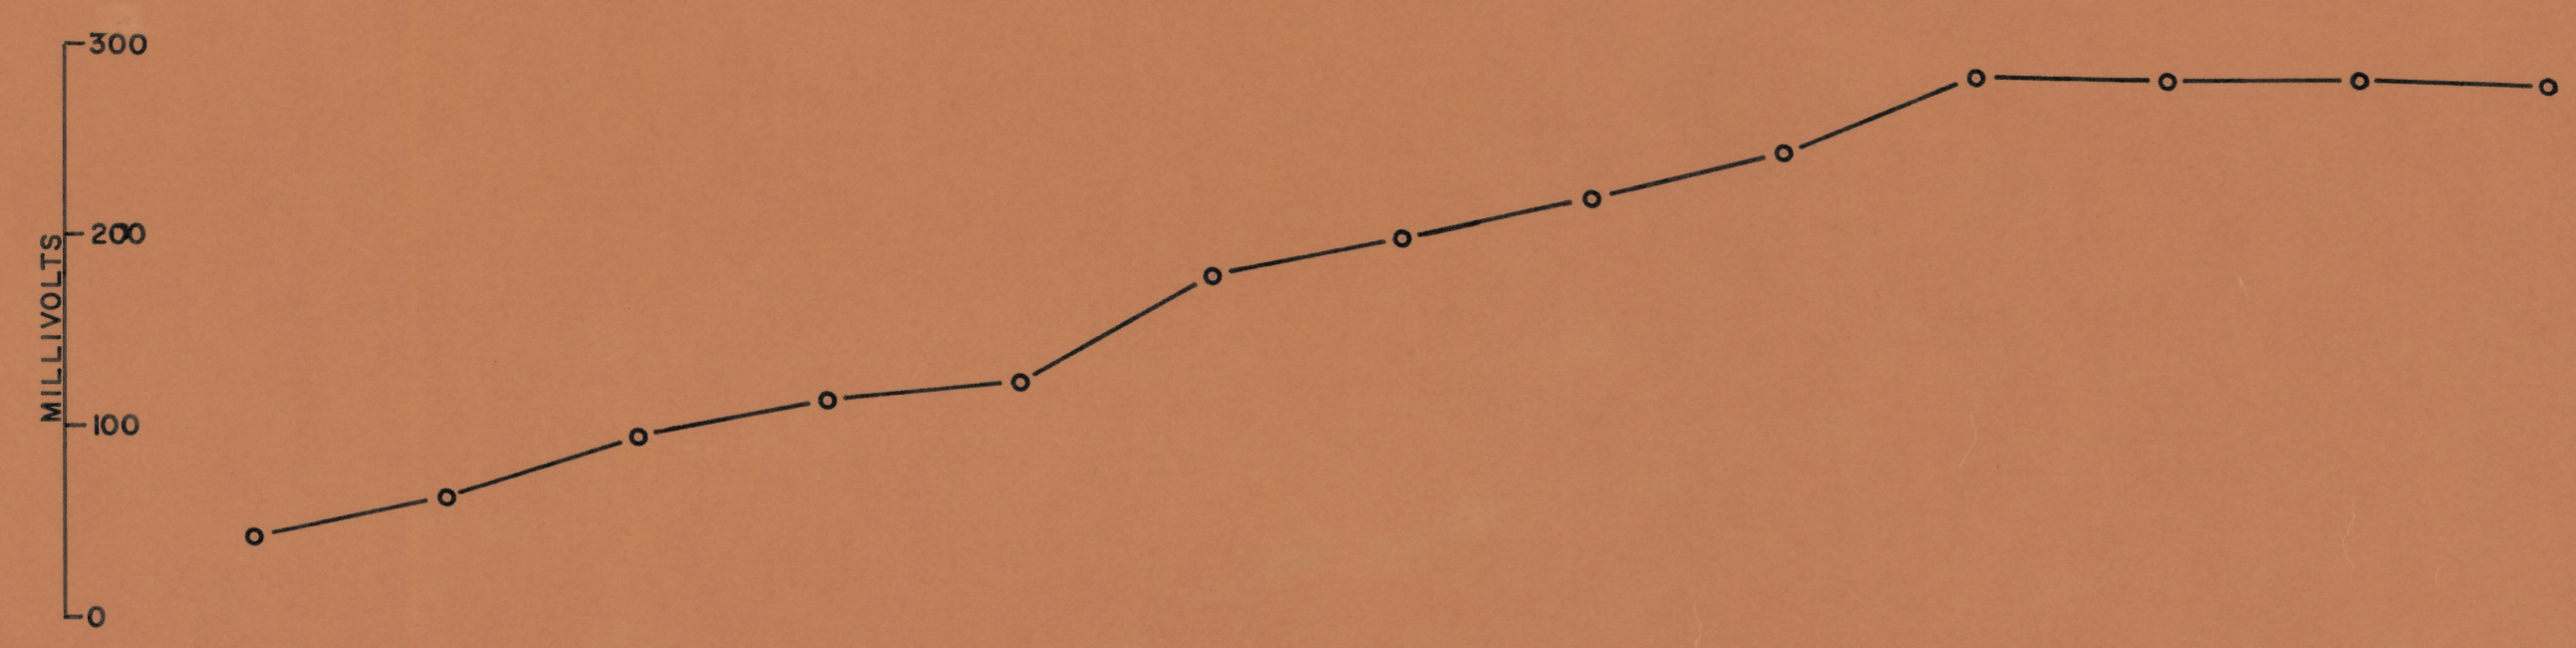

g/101-120-20-105 11/23/68 bernag