APPARENT RESISTIVITY (ρ OHM FEET)
IN UNITS OF OHM FEET

CONTOUR INTERVAL: LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL: CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$(MCF = \frac{PFE \times 1000}{\rho DC})$
CONTOUR INTERVAL: LOGARITHMIC

EXPLANATION

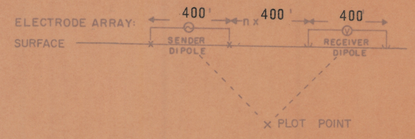

RELATIVE ANOMALY STRENGTH

LOOKING N 35 E

HARQUAHALA AREA

SECTIONAL DATA SHEET
LINE NO. E (SPR 1 & 2)
INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 400' DATE: MAY 1968

FOR

C F & I STEEL CORPORATION

SELF POTENTIAL

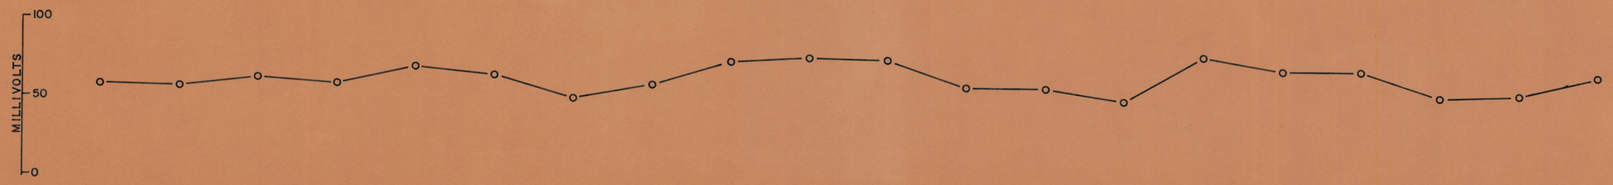

HEINRICHS
GEOEXPLORATION COMPANY
POST OFFICE BOX 5671, TUCSON, ARIZONA, 85703
Phone: 602 623-0578 Cable: GEOEX, Tucson
vancouver
sydney
geophysical engineers