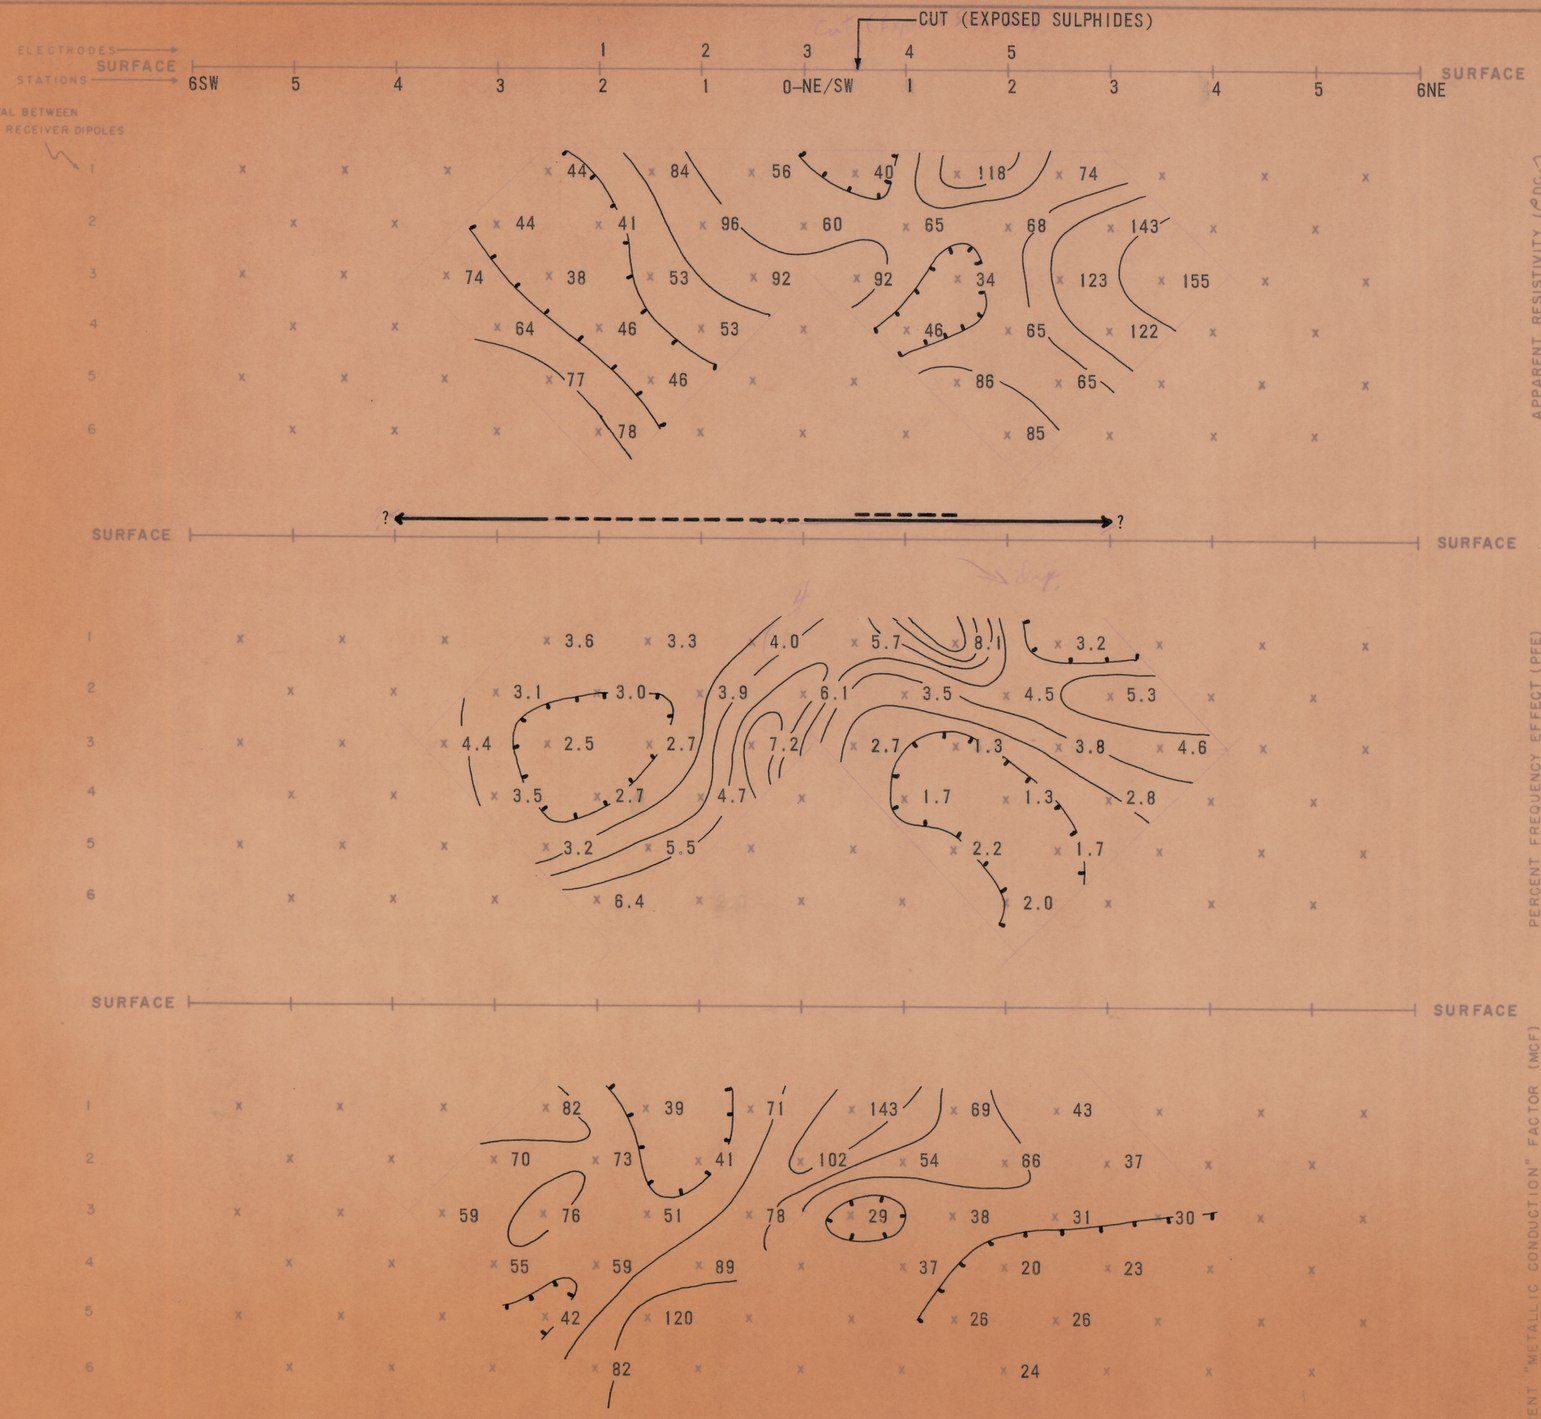

APPARENT RESISTIVITY ($\rho_a = 2\pi \frac{DC}{I}$) IN UNITS OF OHM FEET

CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$(MCF = \frac{PFE \times 1000}{\rho_{DC}/2\pi})$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

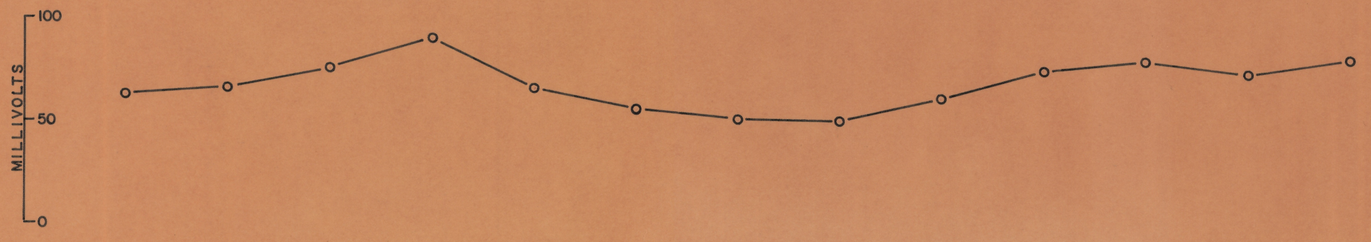

EXPLANATION

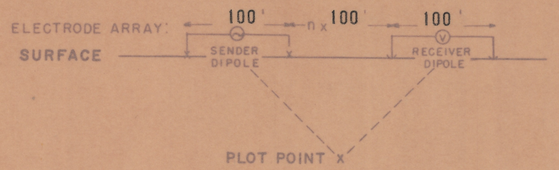

RELATIVE ANOMALY STRENGTH

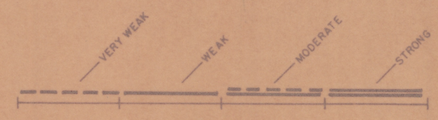

LOOKING N 28° W

HARQUAHALA AREA

SECTIONAL DATA SHEET

LINE NO. OPEN PIT SPECIAL

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 100' DATE: APR 1968

FOR

C F & I STEEL CORPORATION

HEINRICHS
GEOEXPLORATION COMPANY
POST OFFICE BOX 5671, TUCSON, ARIZONA, 85703
Phone: 602/623-0578 Cable: GEOEX, Tucson
geophysical engineers vancouver sydney