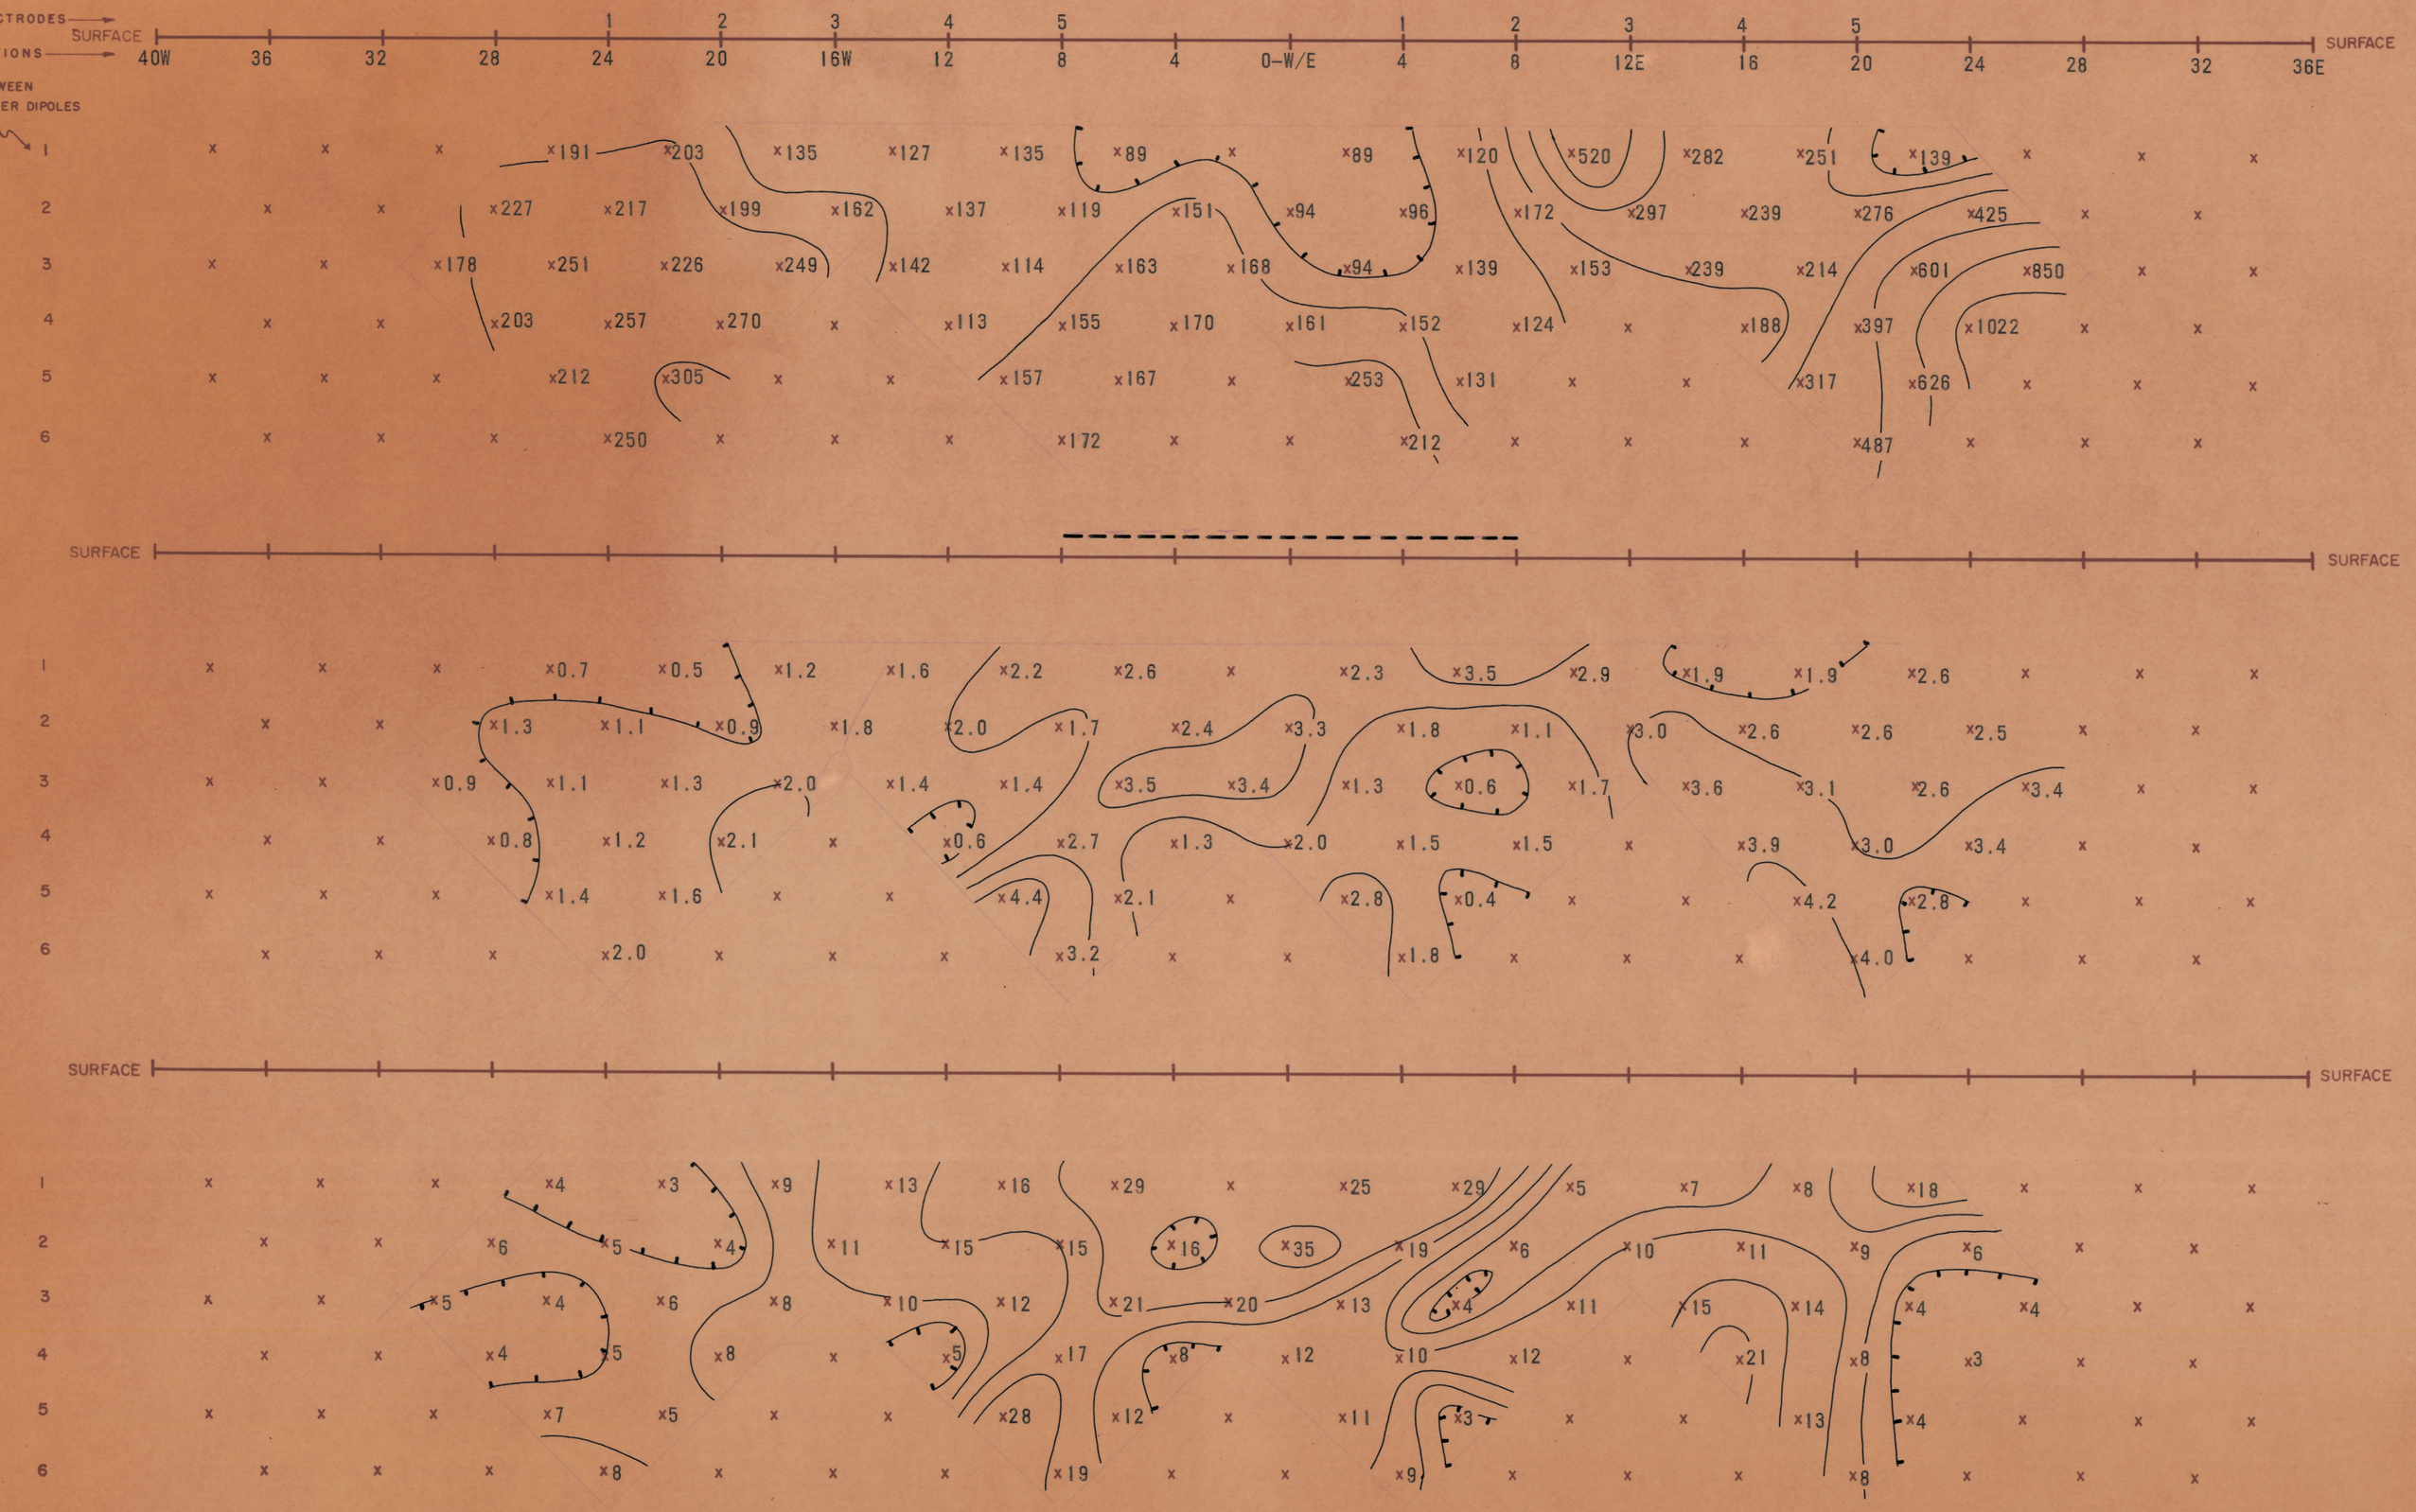

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET

CONTOUR INTERVAL: LOGARITHMIC
SENDER FREQUENCY: 0.05 c.p.s.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 c.p.s.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = PFE x 1000 / ρ_{DC})
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

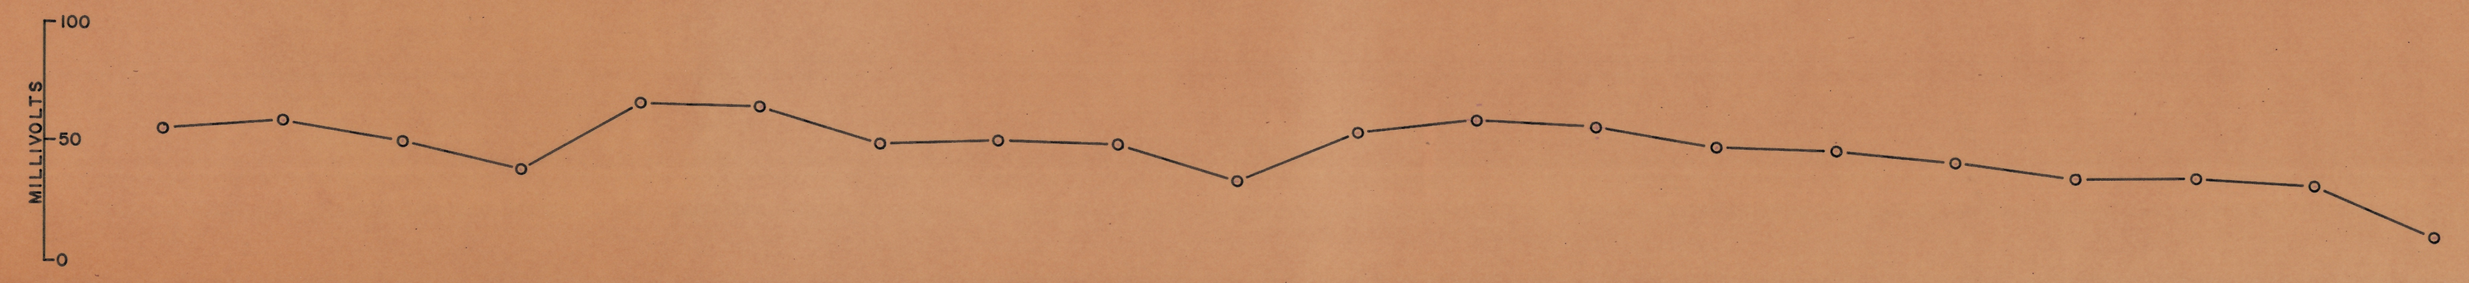

EXPLANATION

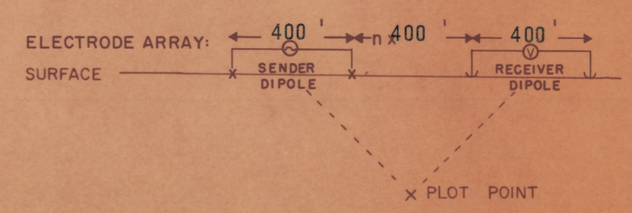

RELATIVE ANOMALY STRENGTH

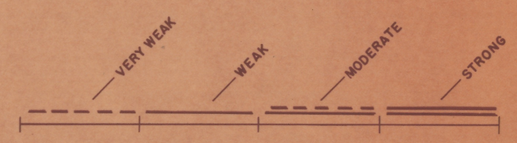

LOOKING N 35° E

HARQUAHALA AREA

SECTIONAL DATA SHEET

LINE NO. C (SPREADS 1 & 2)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 400' DATE: APR 1968

FOR

C F & I STEEL CORPORATION

HEINRICHS
GEOEXPLORATION COMPANY
POST OFFICE BOX 5671 · TUCSON, ARIZONA 85703
Phone: 602/623-0578 Cable: GEOEX, Tucson
vancouver
sydney
geophysical engineers

P501
1054
6