



ELECTRODE STATIONS SURFACE 60SW 50 40 39 20 10 2 3 4 5 30 40 50 60NE SURFACE

PIPE LINES SPREAD 1

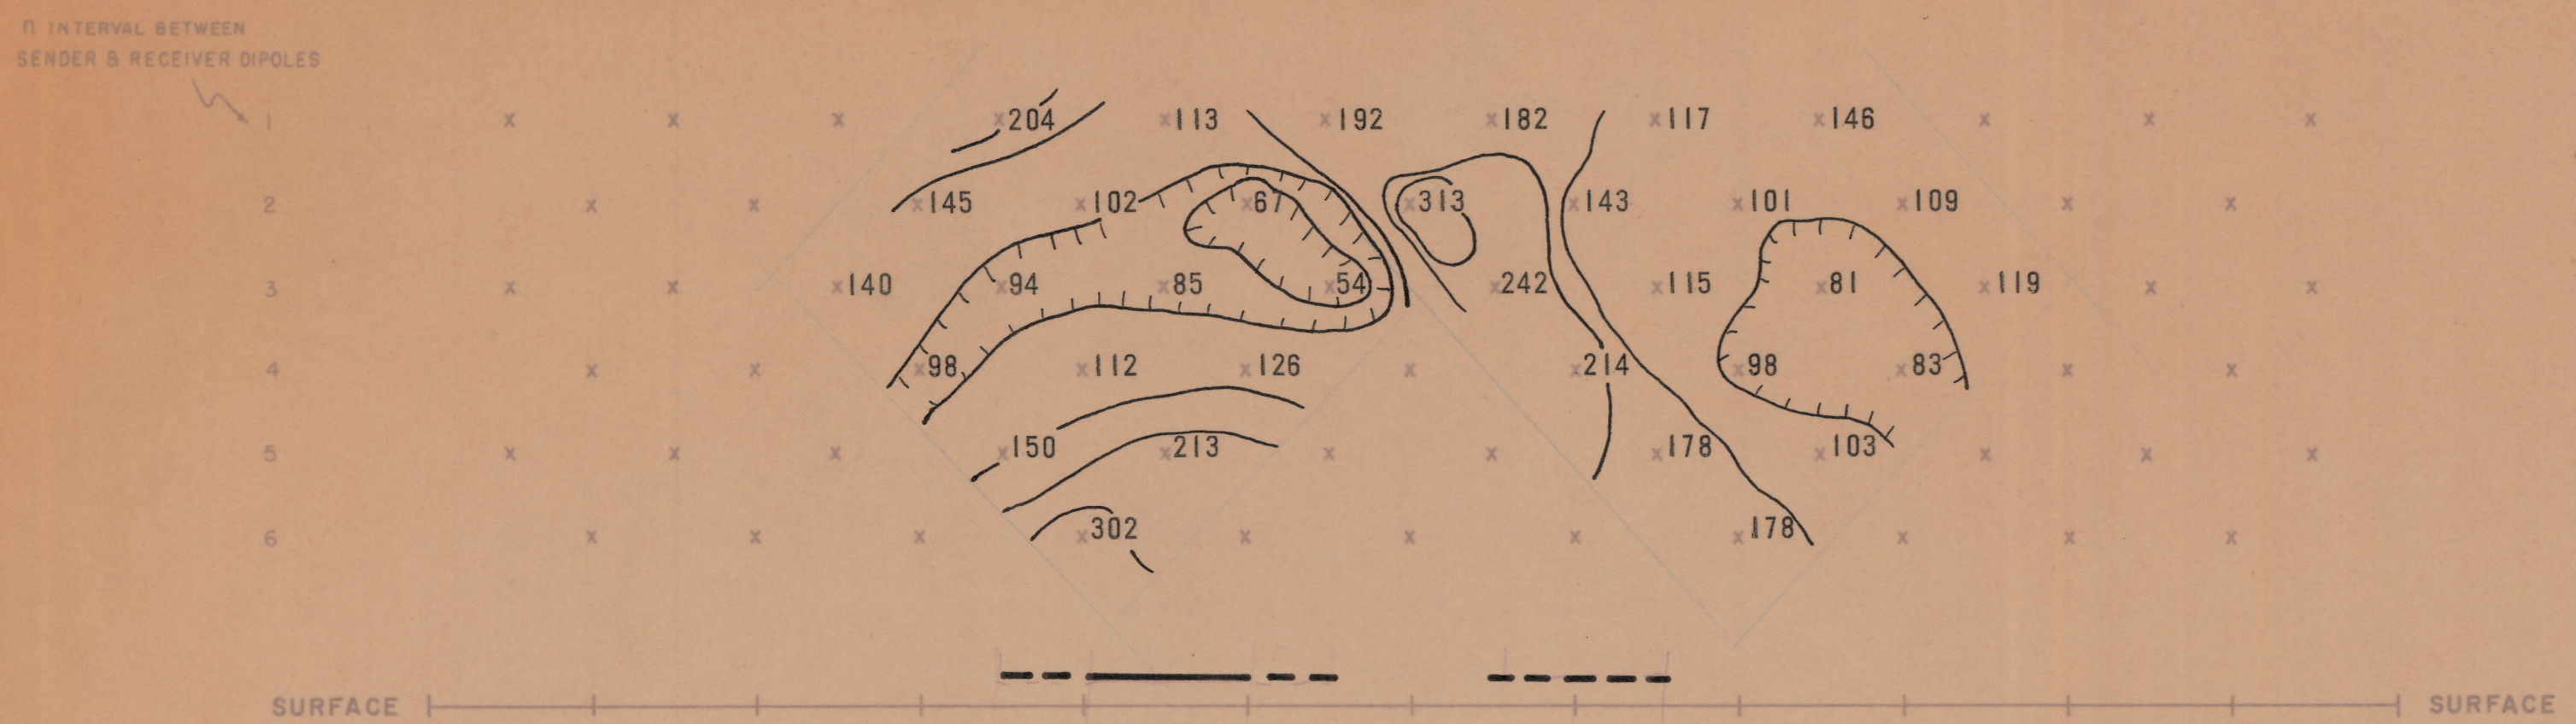


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.


EXPLANATION

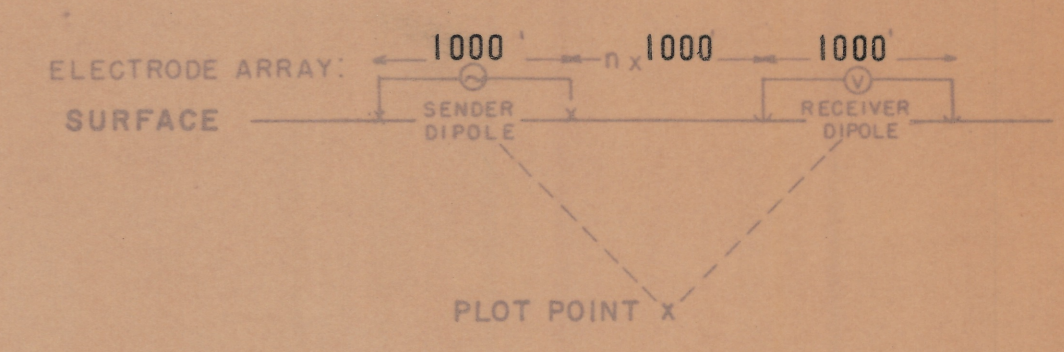


RELATIVE ANOMALY STRENGTH

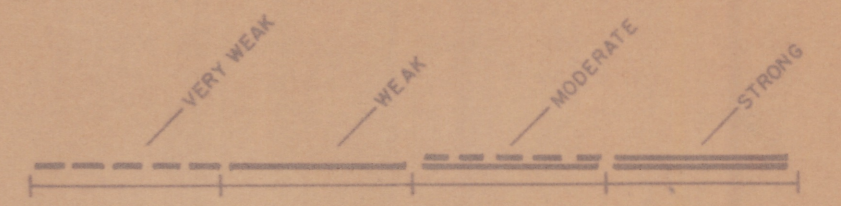

LOOKING N 40° W

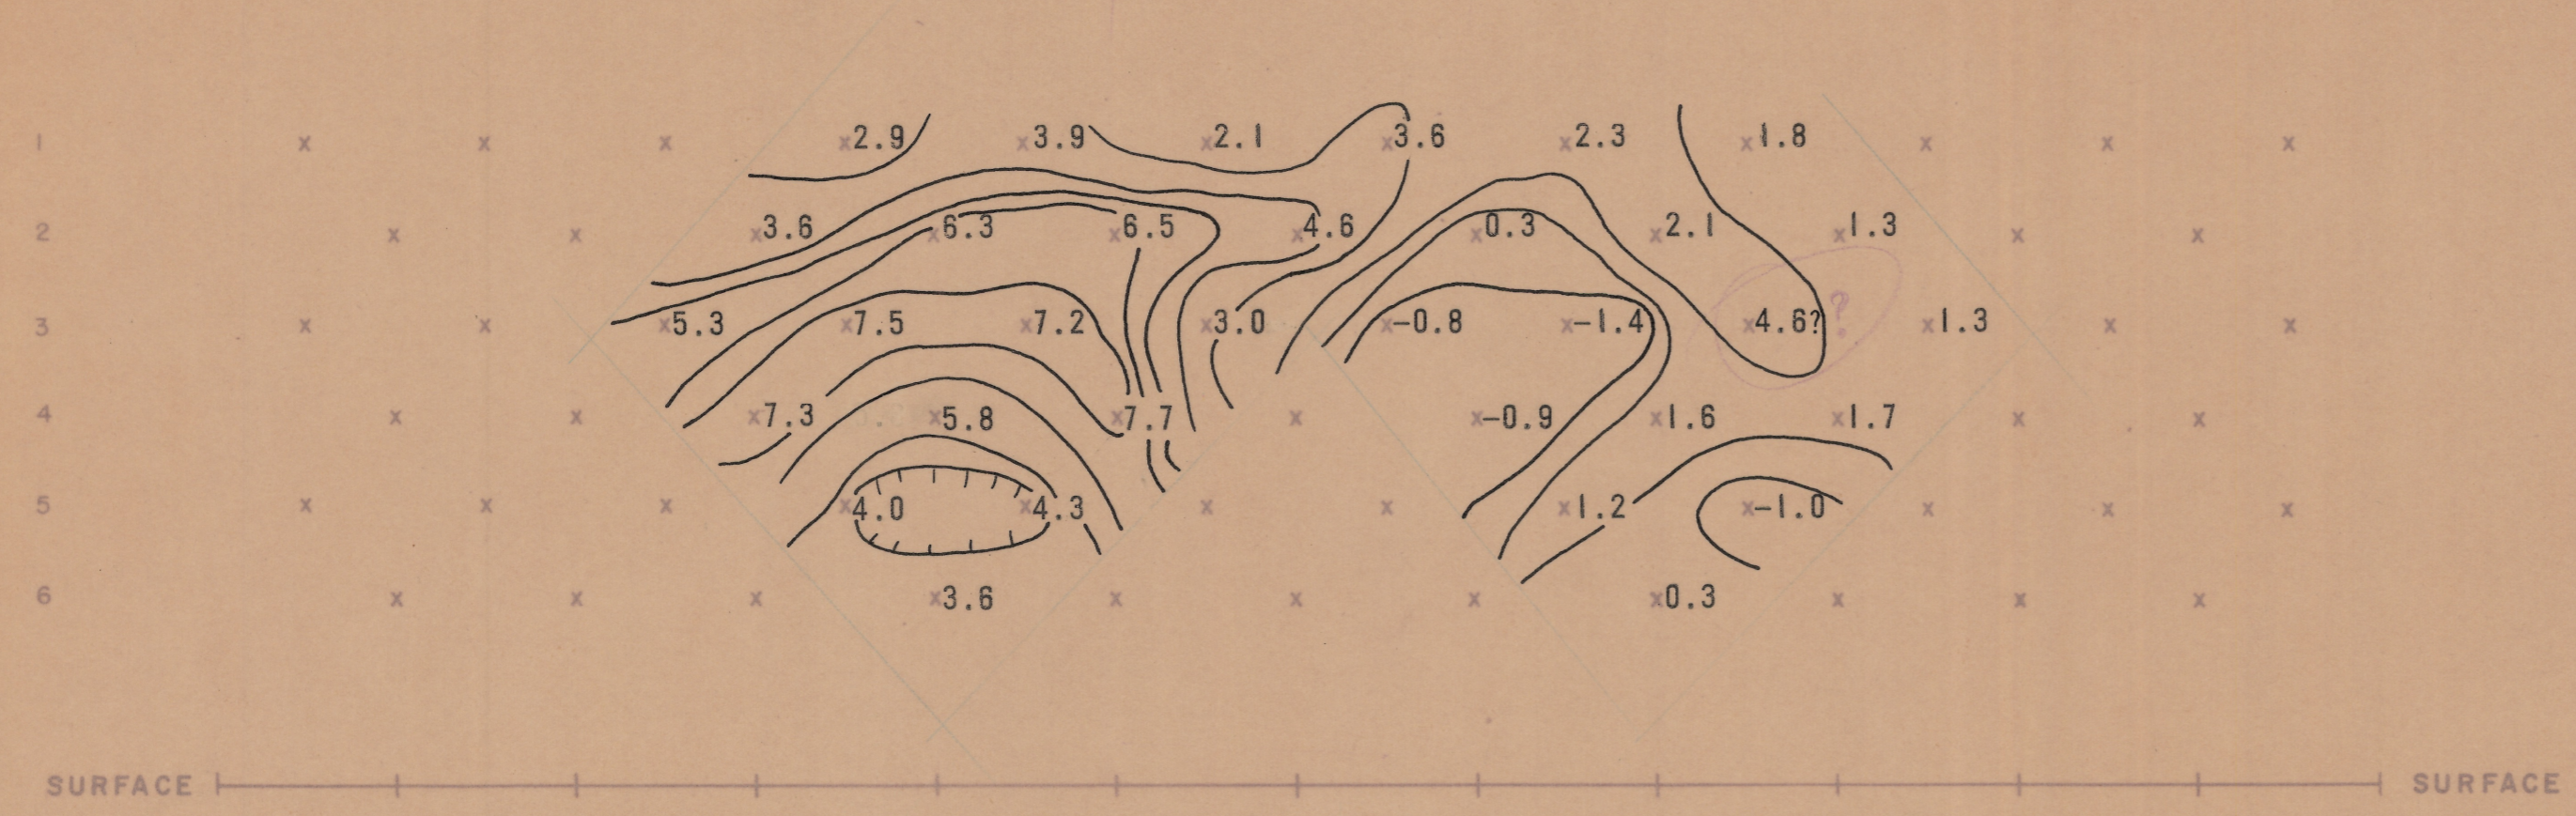


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

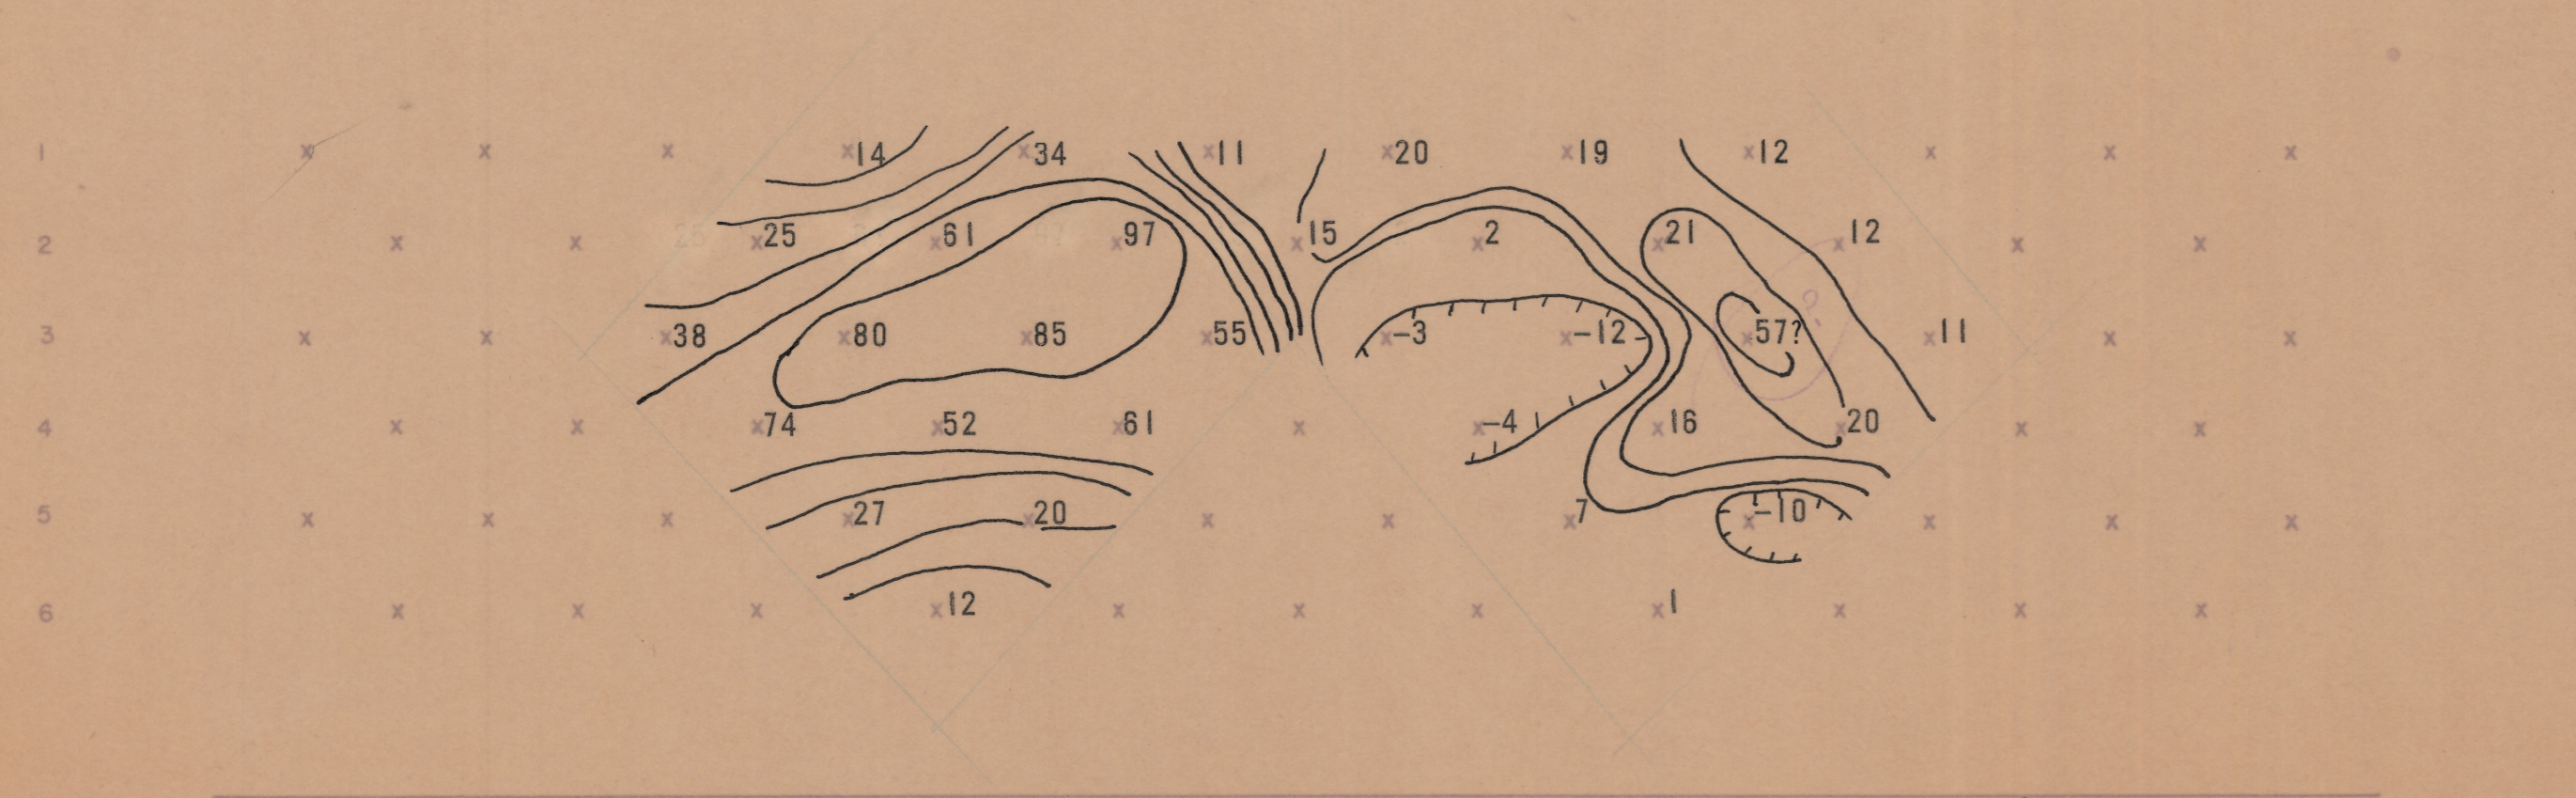

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
(MGF = $\frac{\rho_{DC}}{\rho_{AC}} \times 1000$)
CONTOUR INTERVAL LOGARITHMIC

DRAGOON AREA
SECTIONAL DATA SHEET
LINE NO. 4 SPREAD 1
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000'
DATE: APRIL 1969
FOR
C F & I STEEL CORPORATION

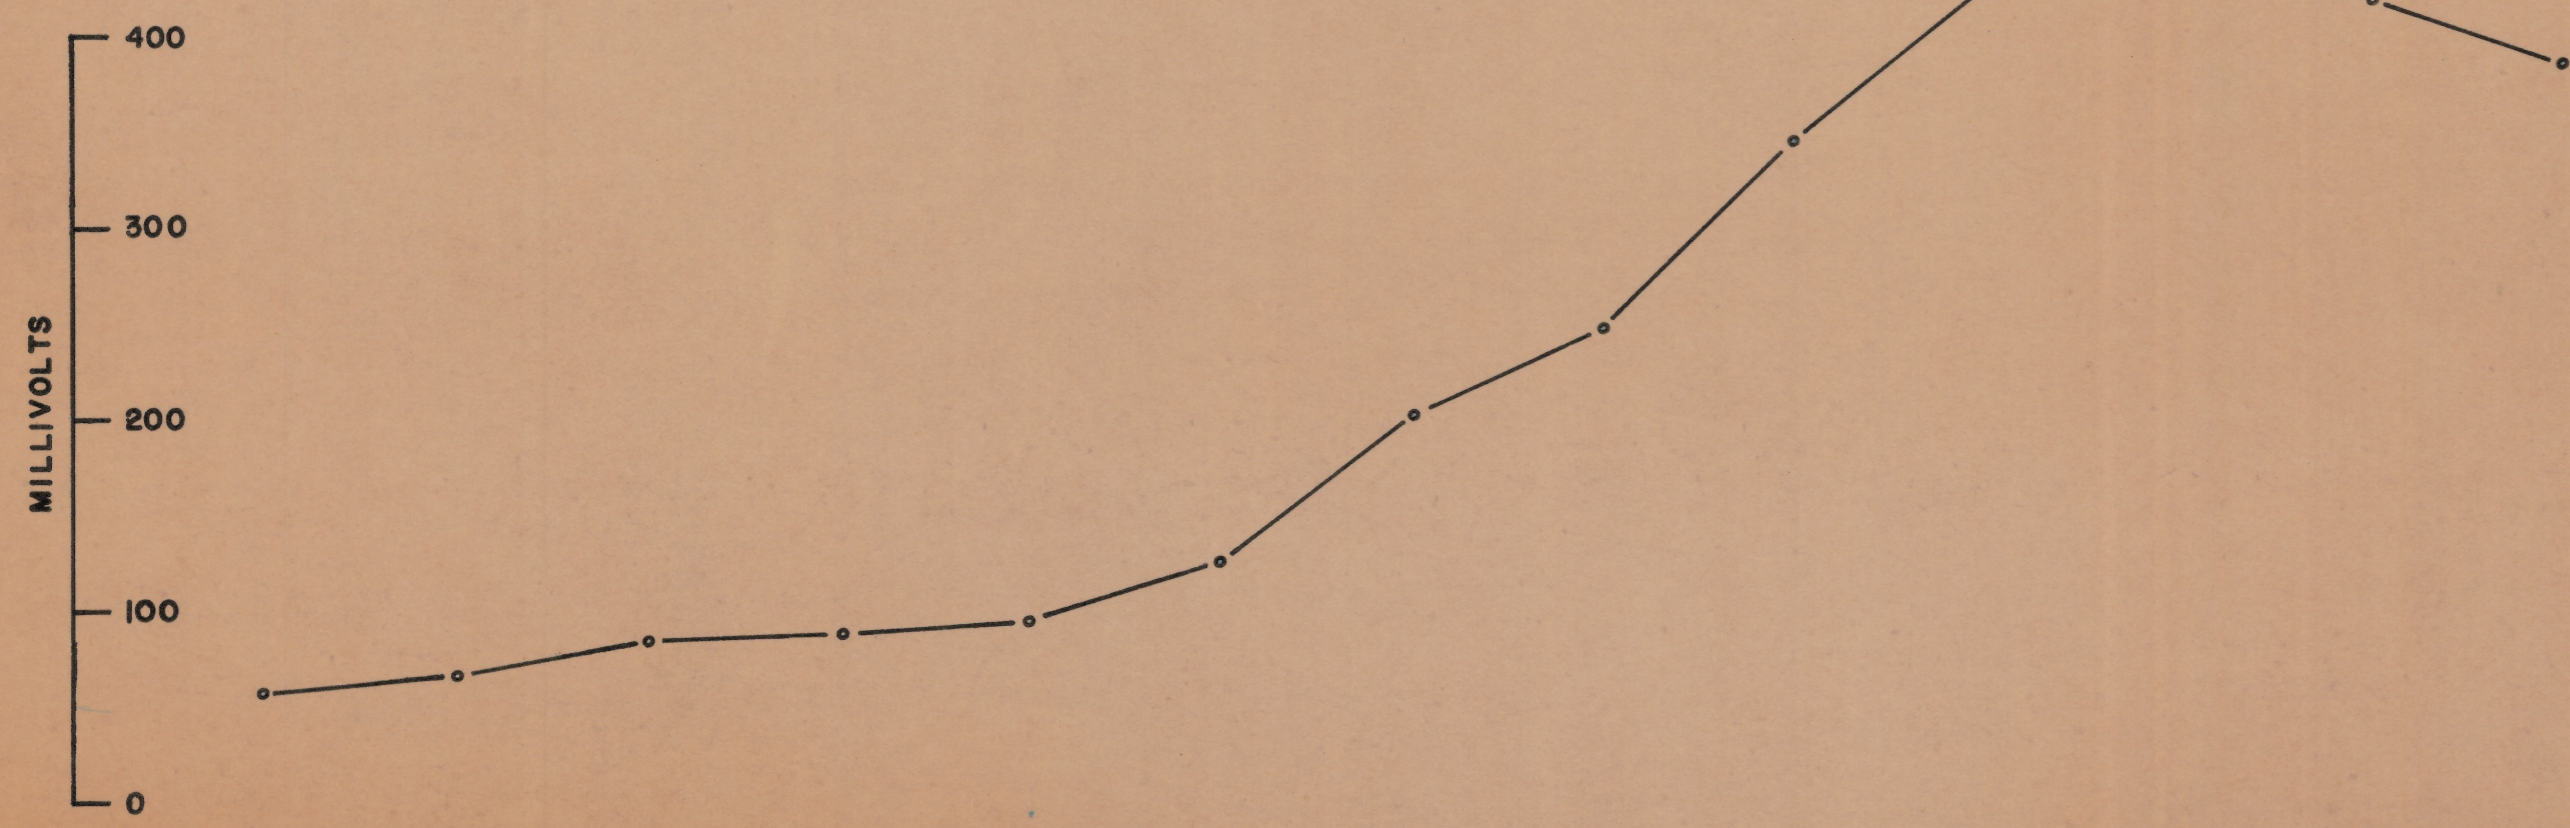

SELF POTENTIAL

Scanned by [unclear] 2014-02-08 14:59