



MILLIVOLTS

0
100
200
300
400

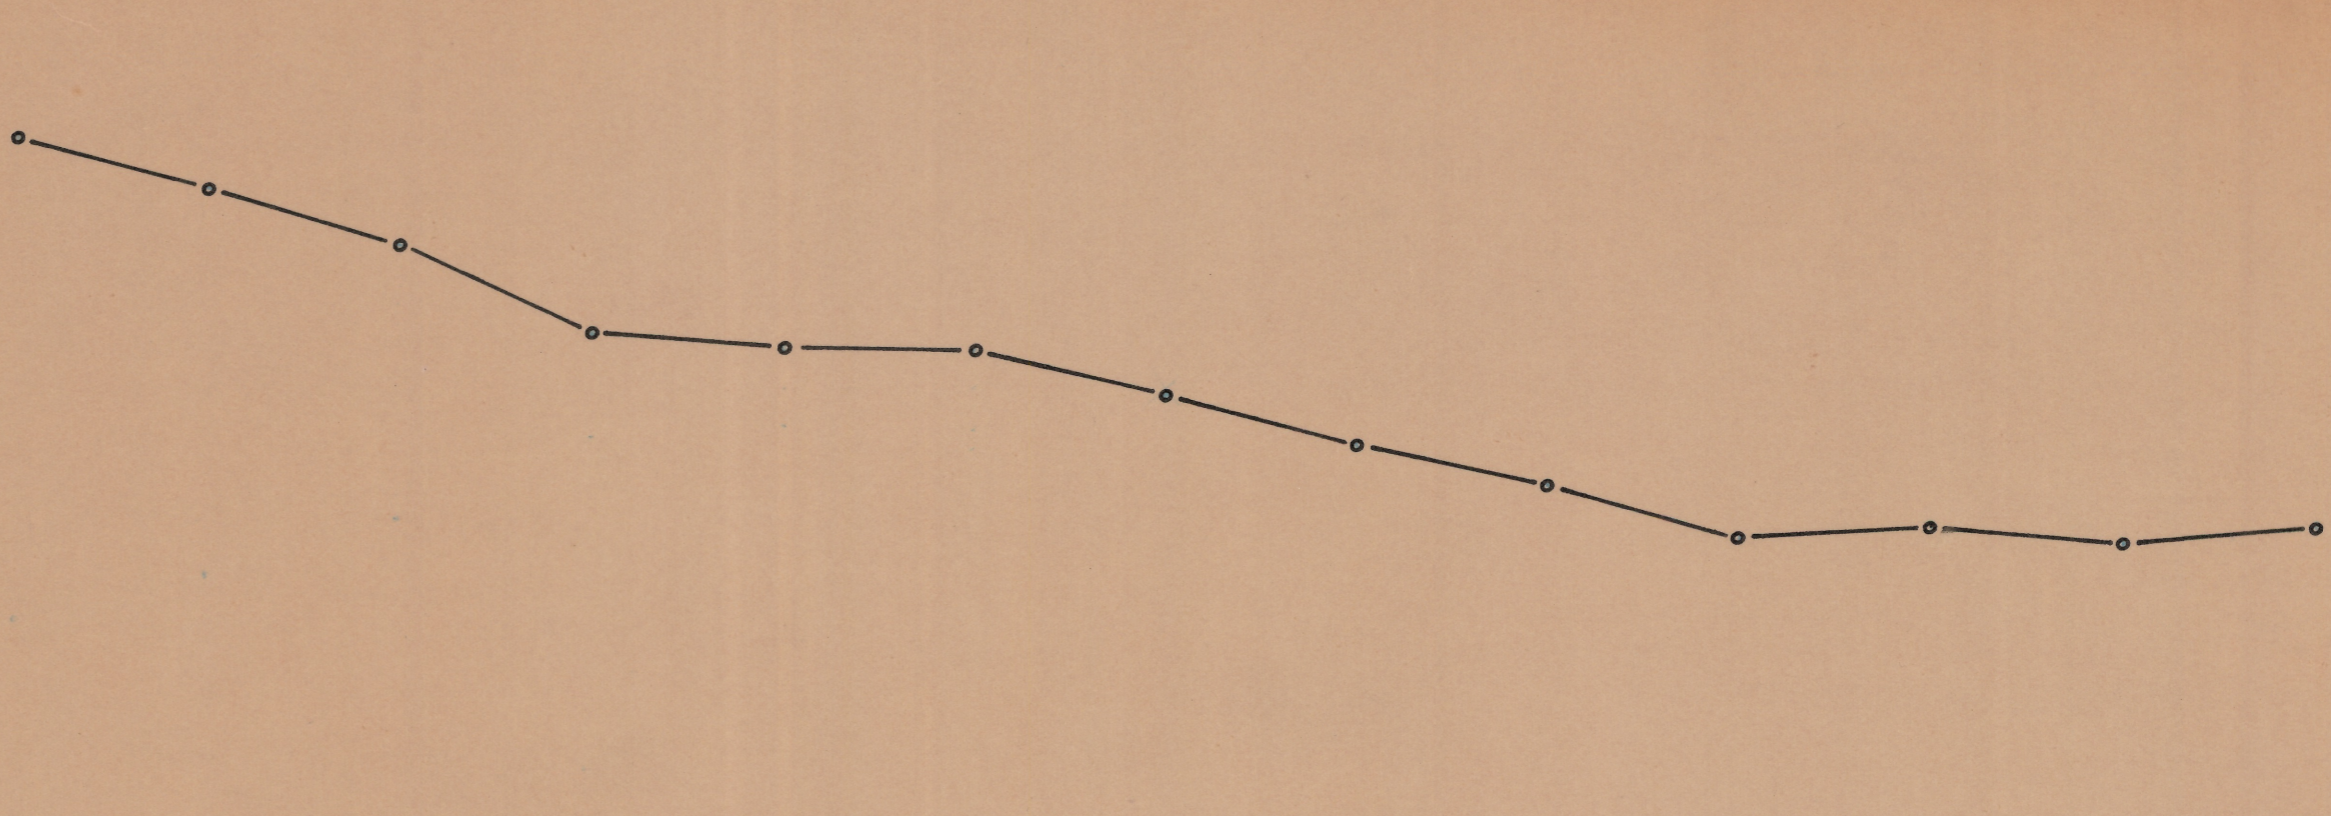


SELF POTENTIAL

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = $\frac{PFE \times 1000}{P_{DC}}$)
 CONTOUR INTERVAL LOGARITHMIC

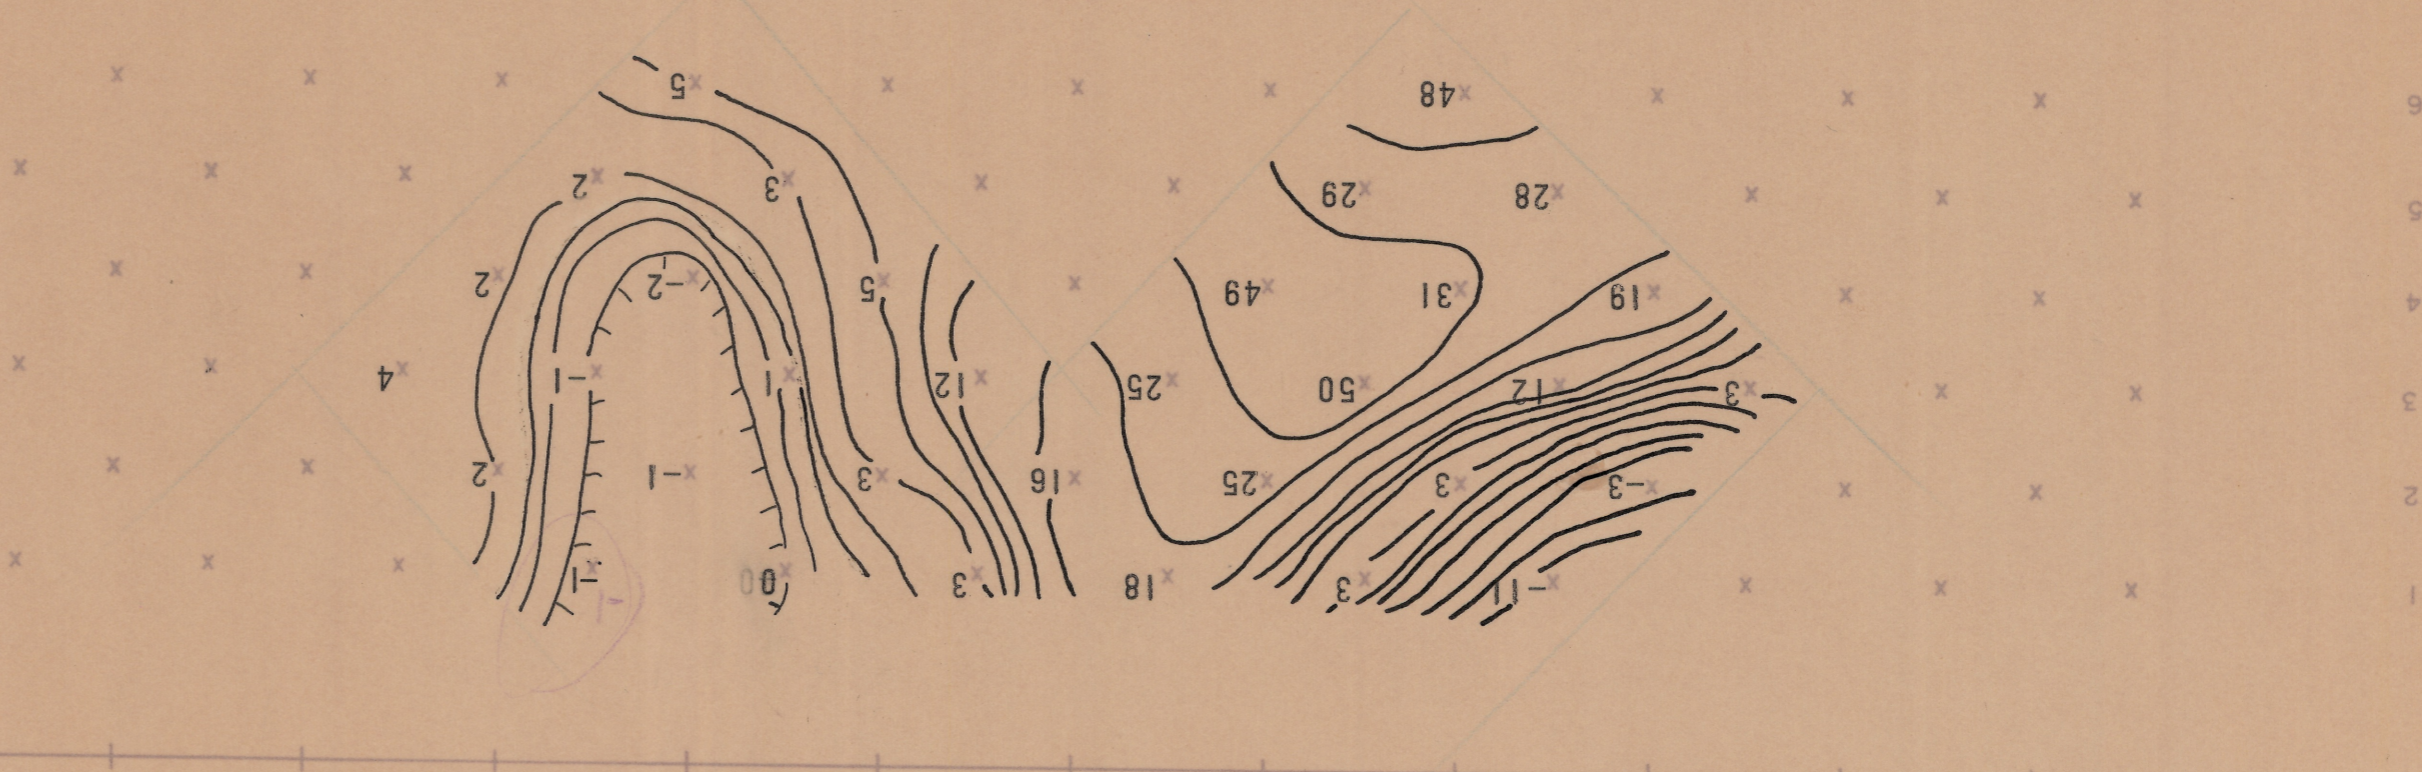

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 005 & 110 CPS

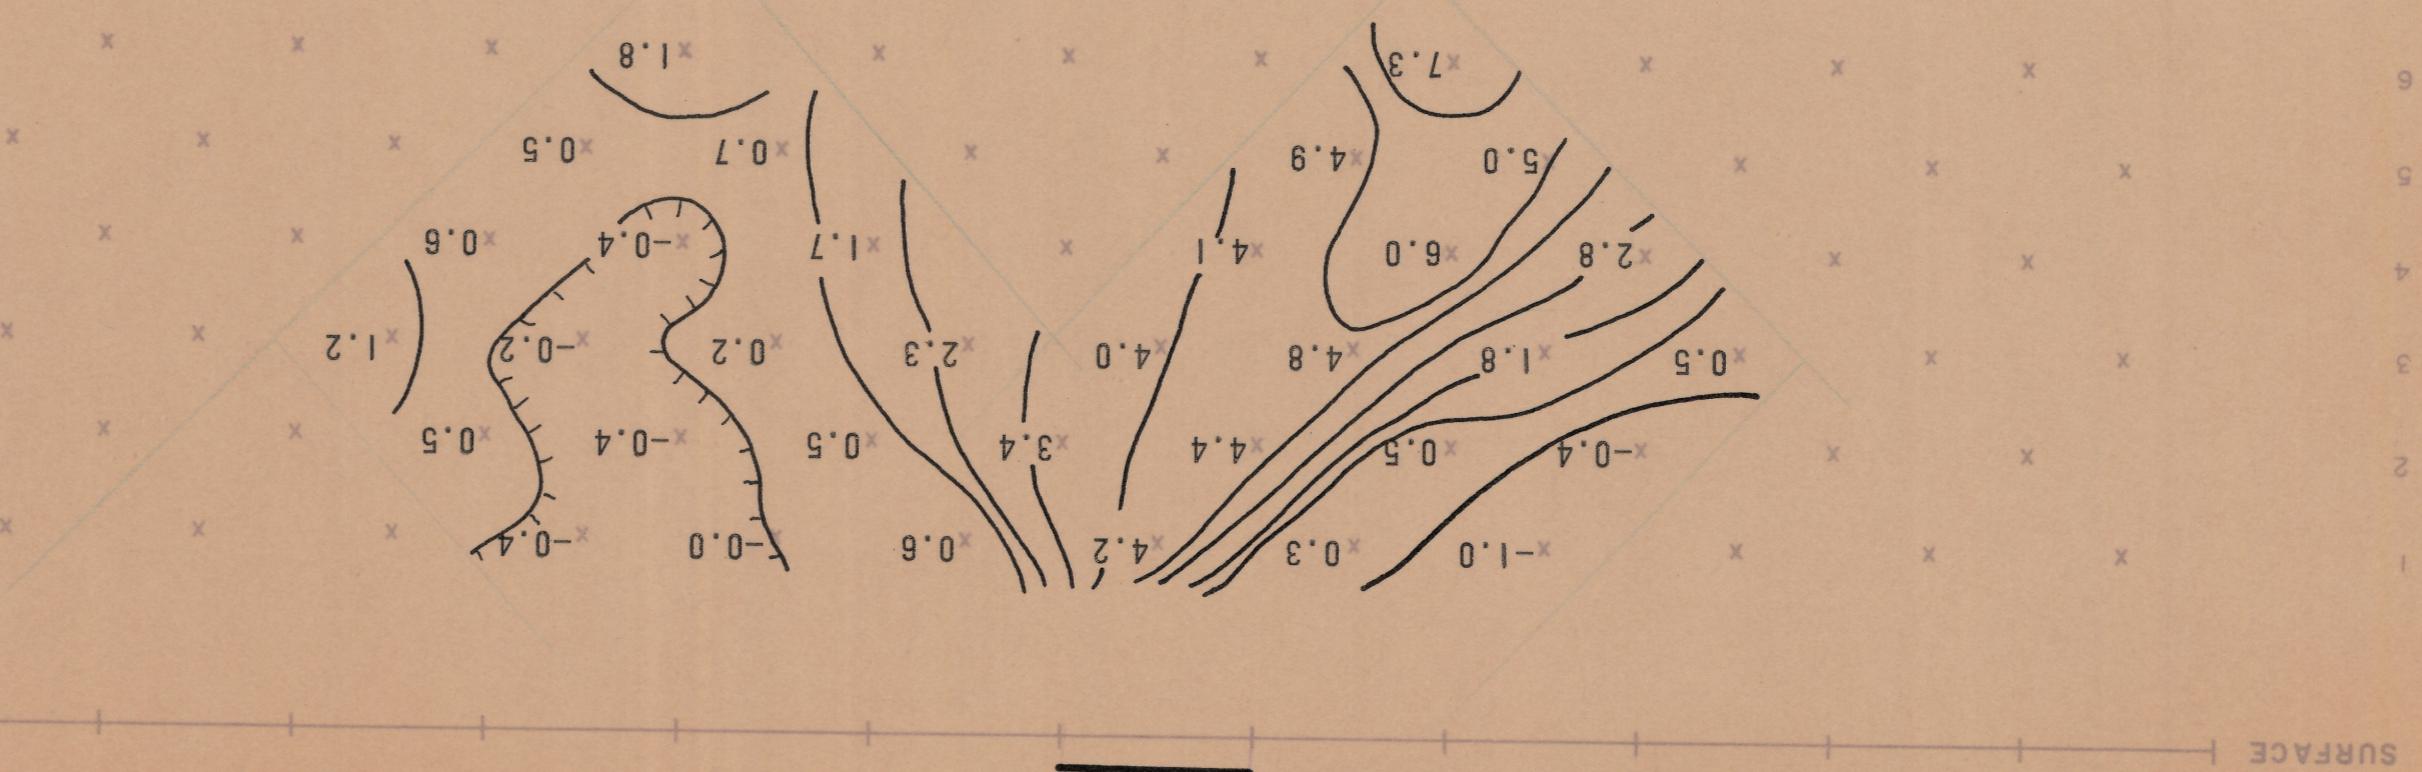


APPARENT RESISTIVITY (ρ_{DC})
 IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 005 CPS




HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000'
 DATE: APRIL 1969
 FOR
 C. F. & I. STEEL CORPORATION

SECTIONAL DATA SHEET
 LINE NO. 5 SPREAD 1
 DRAGON AREA
 INDUCED POLARIZATION TRAVERSE

LOOKING S 60° W

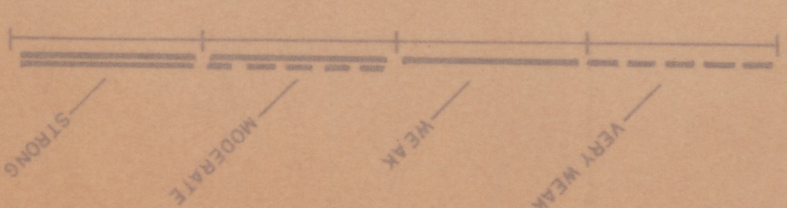

RELATIVE ANOMALY STRENGTH

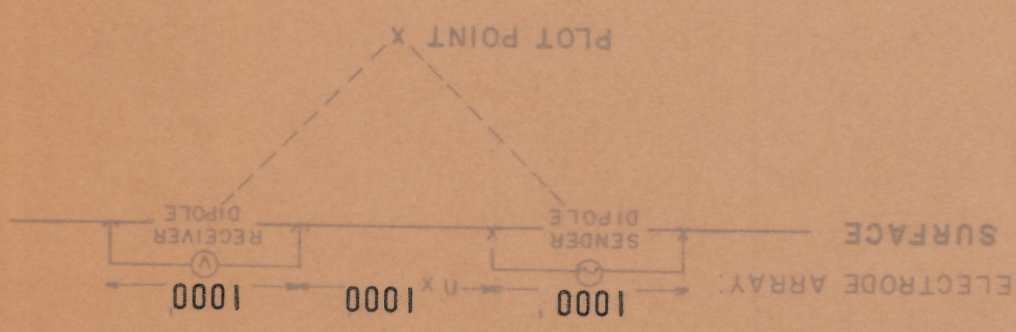

EXPLANATION

