



APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.1 C.P.S.

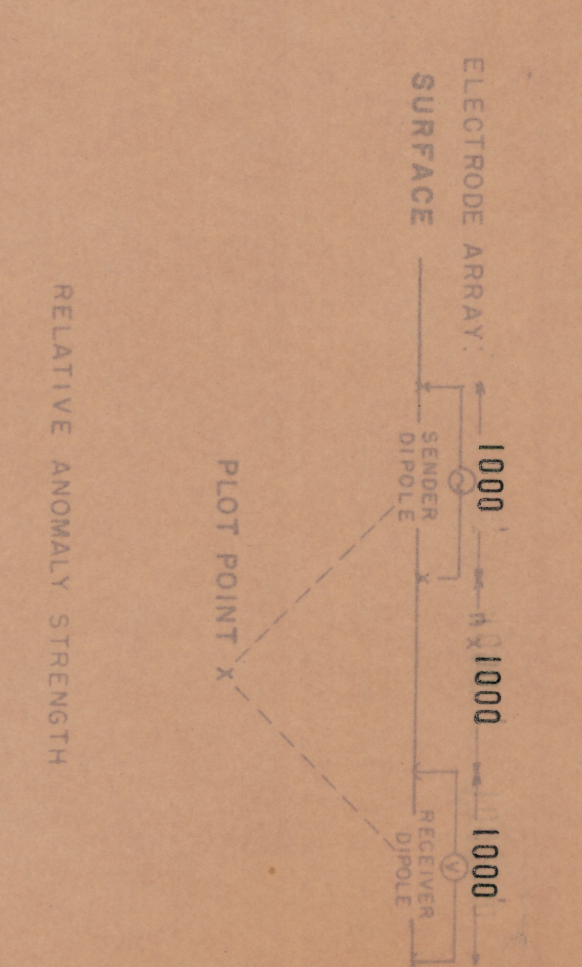


EXPLANATION

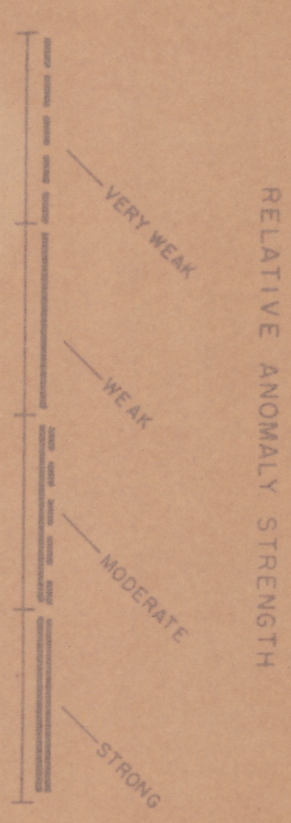


LOOKING NORTHWEST


PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.1 & 1.0 C.P.S.

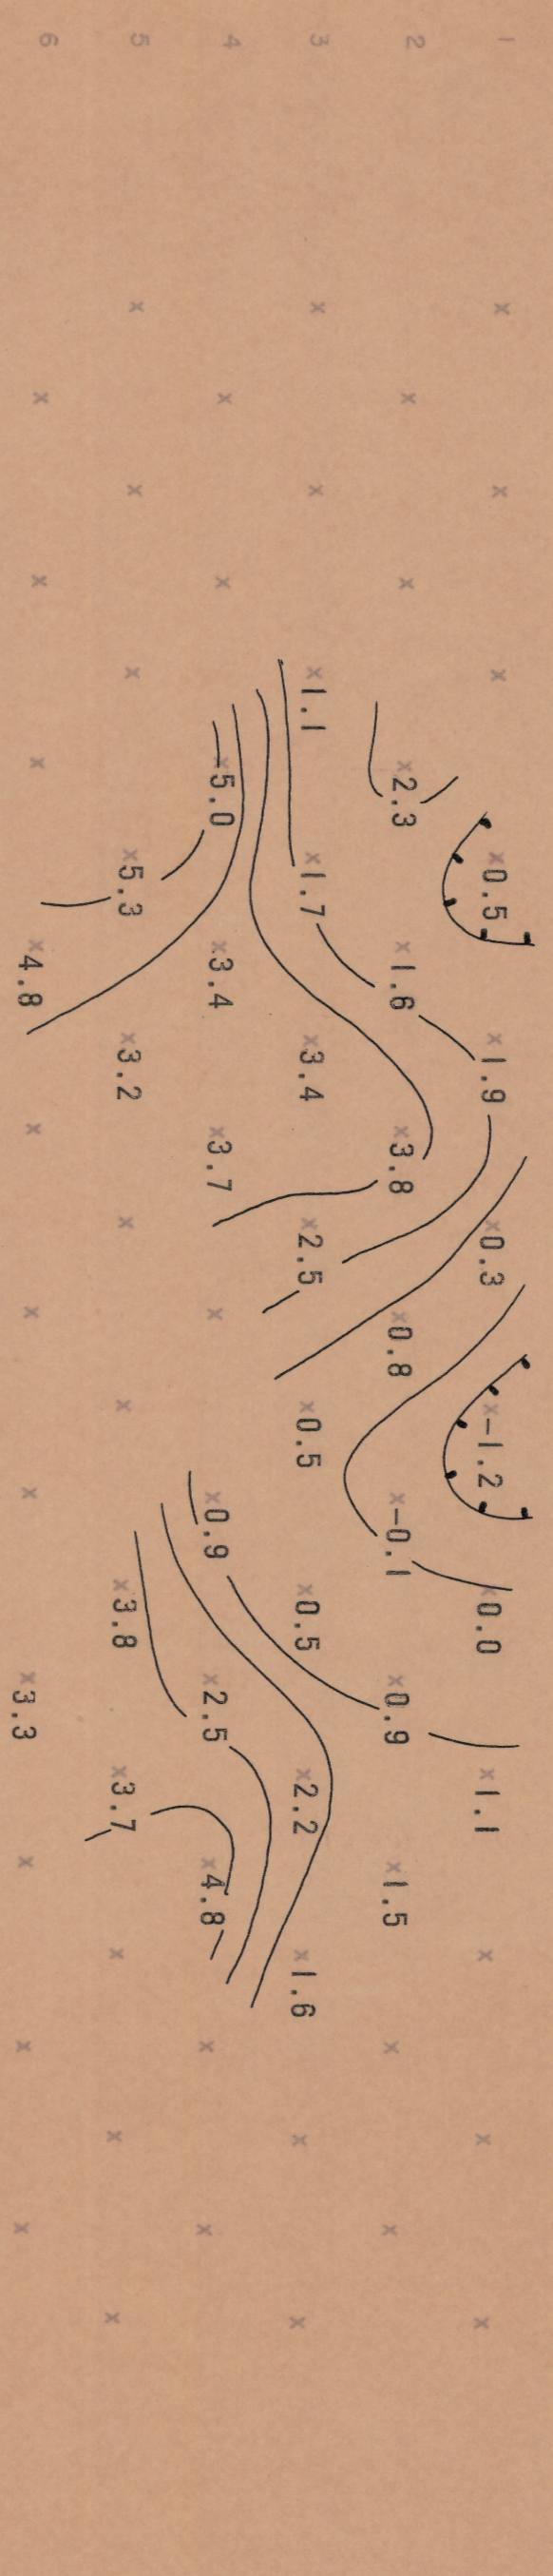

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $(MCF = \frac{PFE \times 1000}{\rho_{DC}})$
 CONTOUR INTERVAL LOGARITHMIC

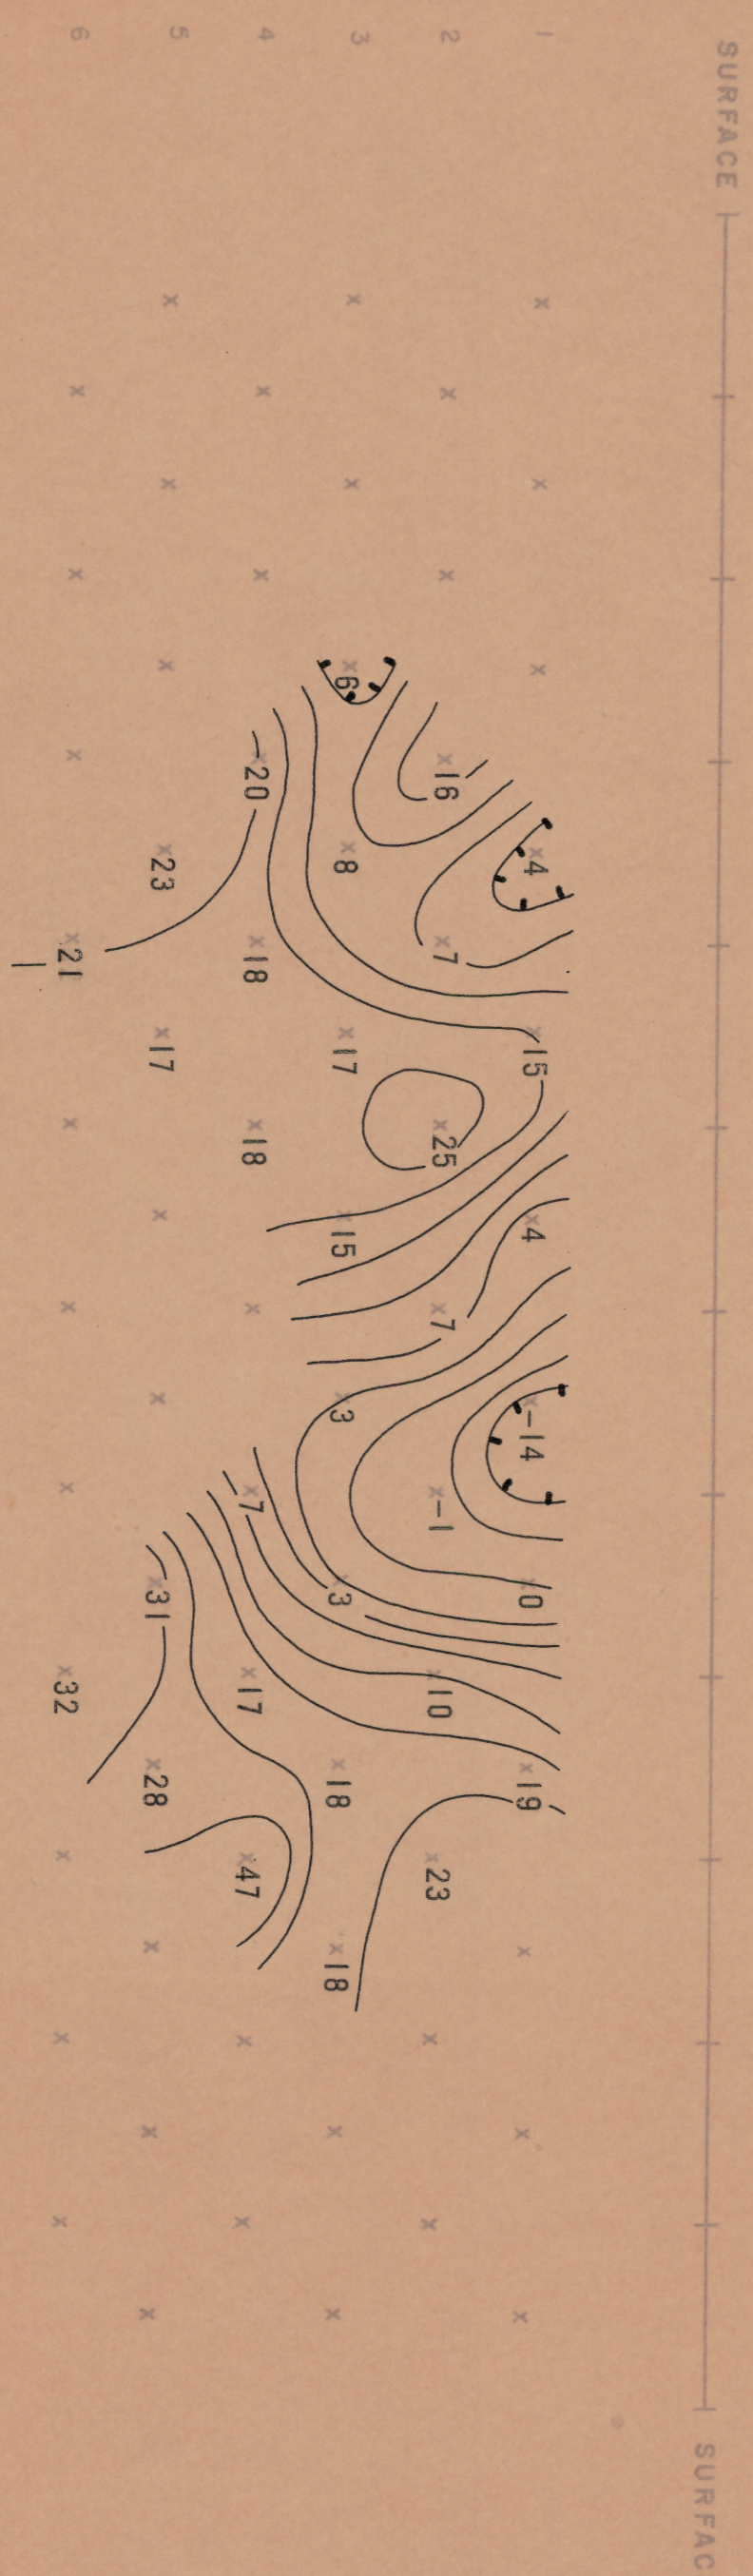

SELF POTENTIAL

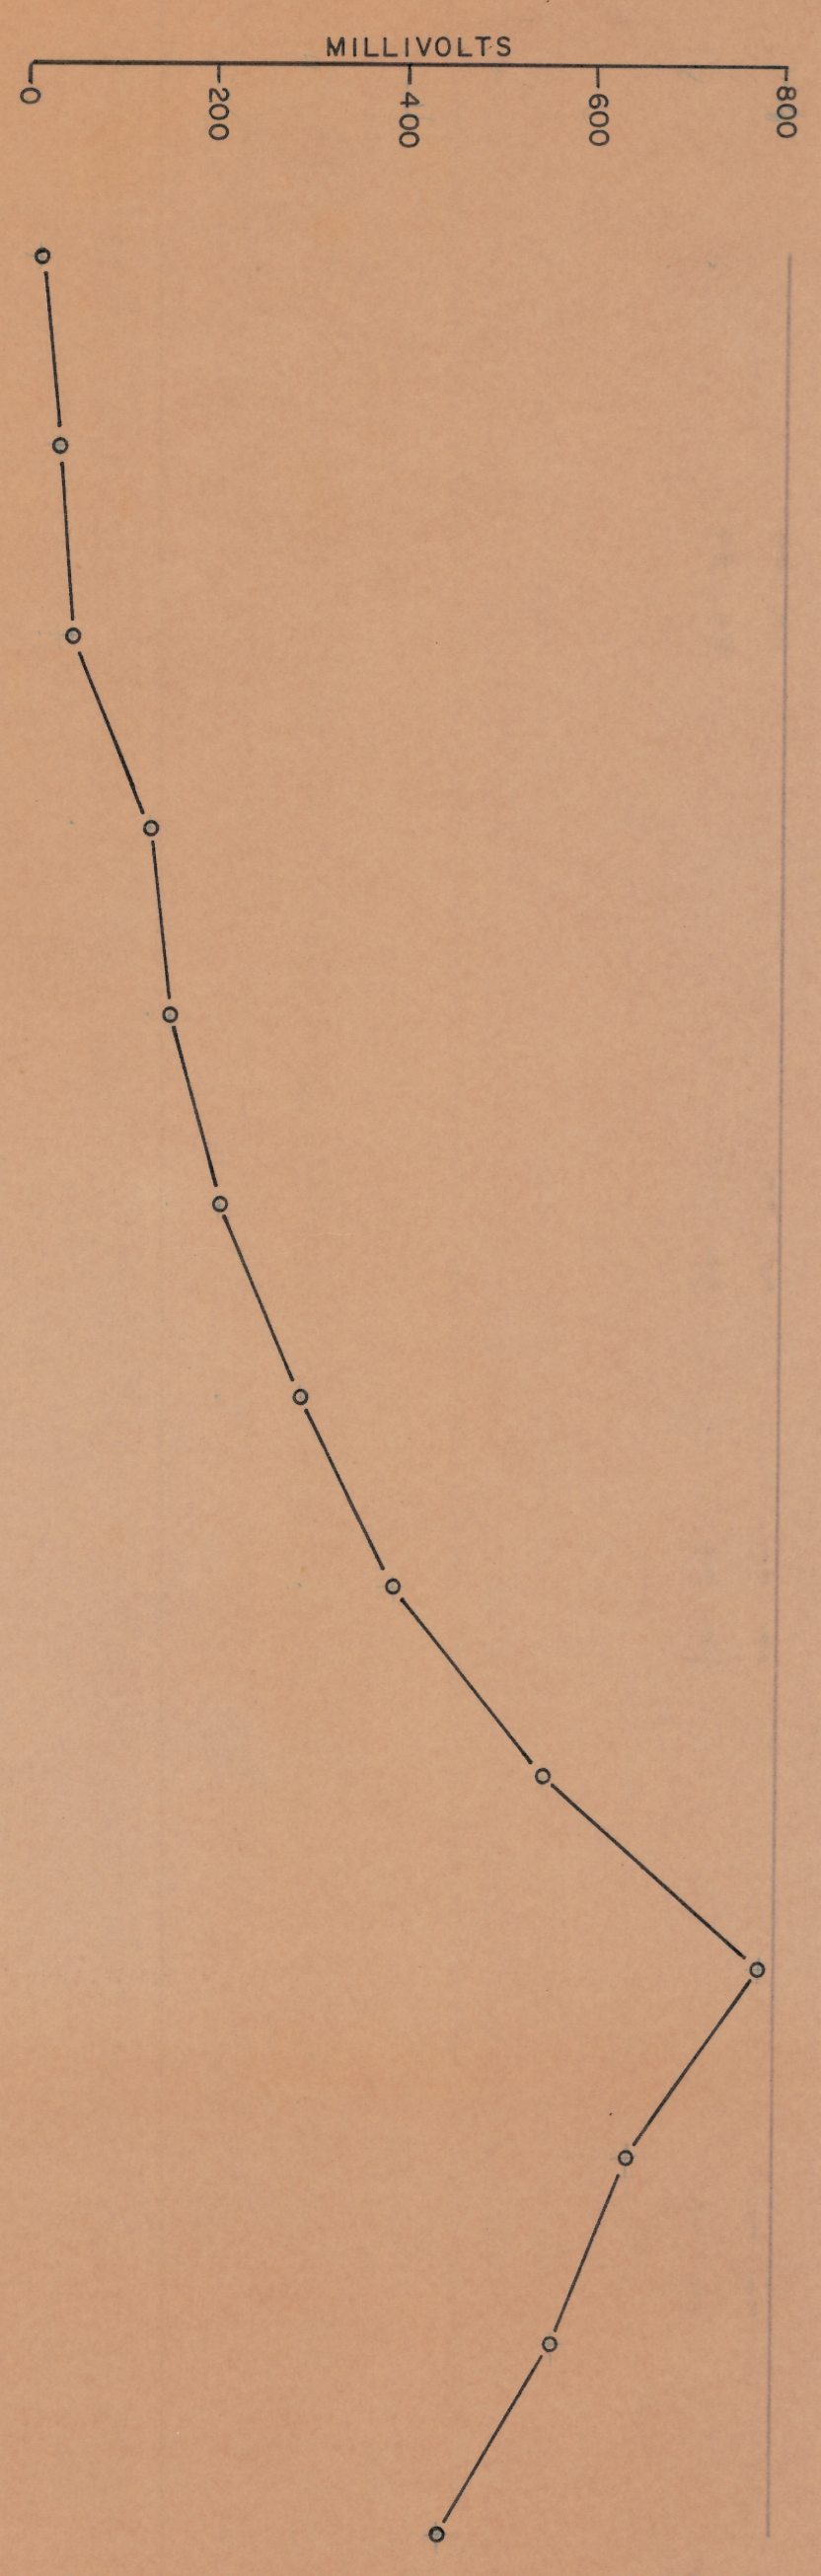

DRAGON AREA
 SECTIONAL DATA SHEET
 LINE NO. 6 (SPREAD 1)
 INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: MAY 1969
 FOR C. F. & I. STEEL CORPORATION

02140-250-20-105 1/12 9845 11/10/20