




APPARENT RESISTIVITY ( $\rho_{DC} / 2\pi r$ )  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.1 Hz

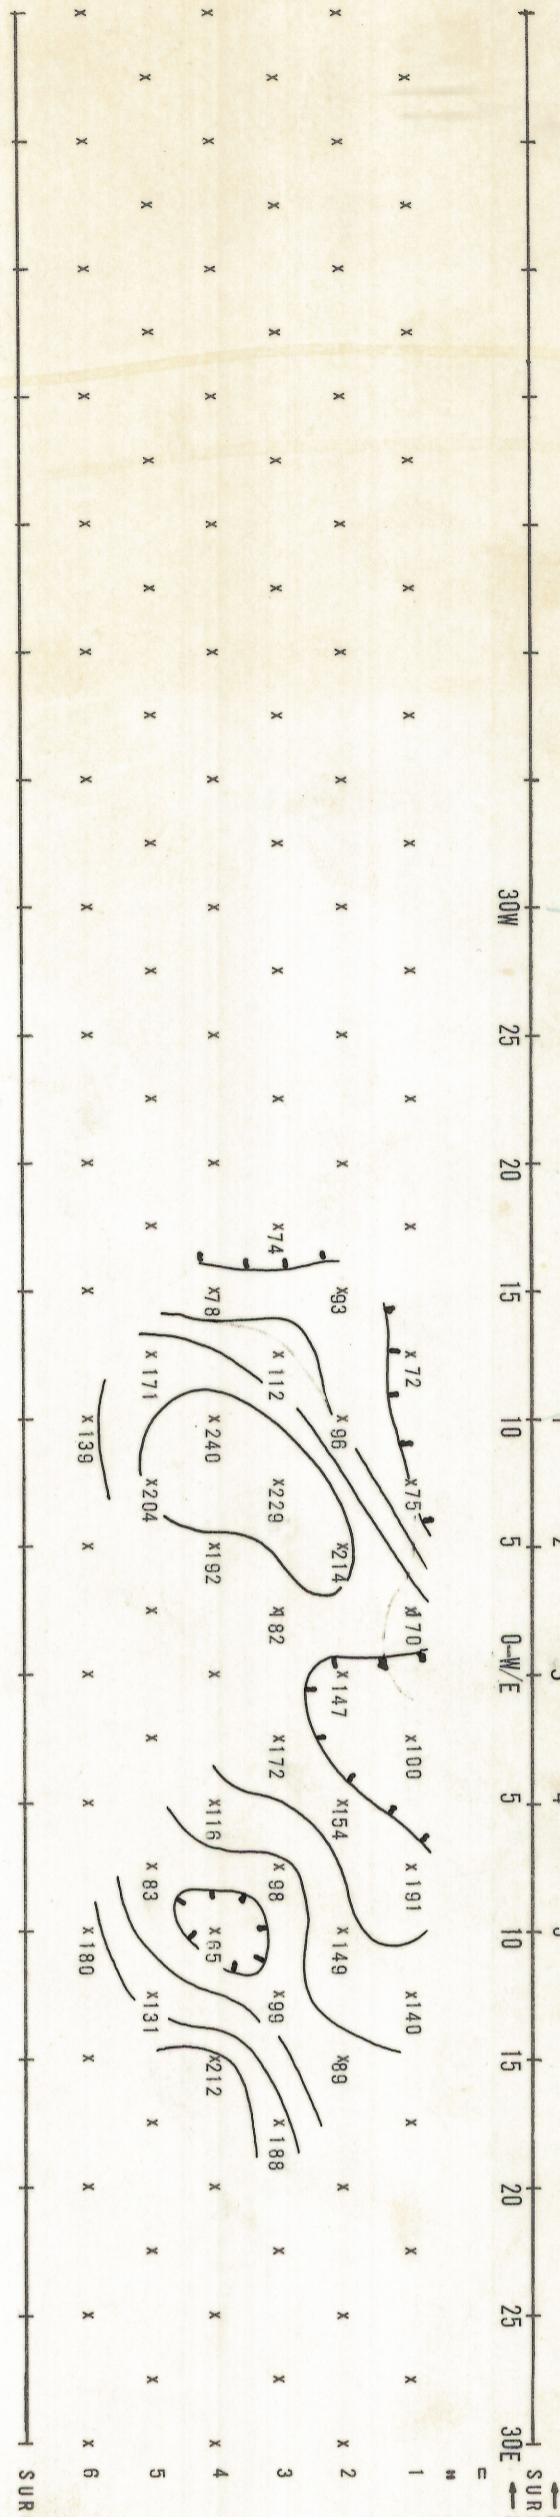


PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.1 & 1.0 Hz

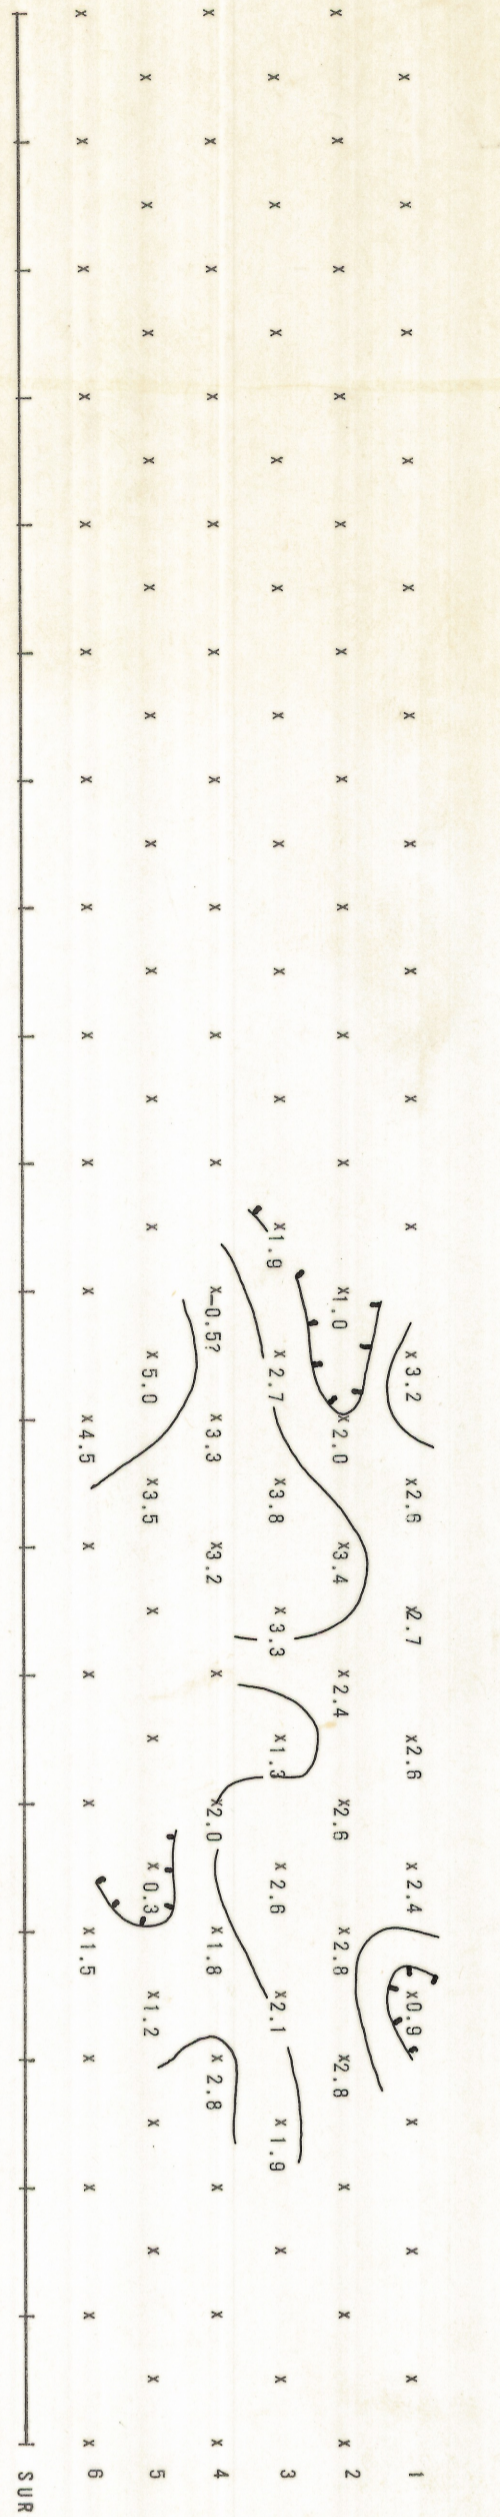

APPARENT METALLIC CONDUCTION FACTOR (MCF)  
 $MCF = \frac{PFE \times 1000}{\rho_{DC} / 2\pi r}$   
CONTOUR INTERVAL LOGARITHMIC

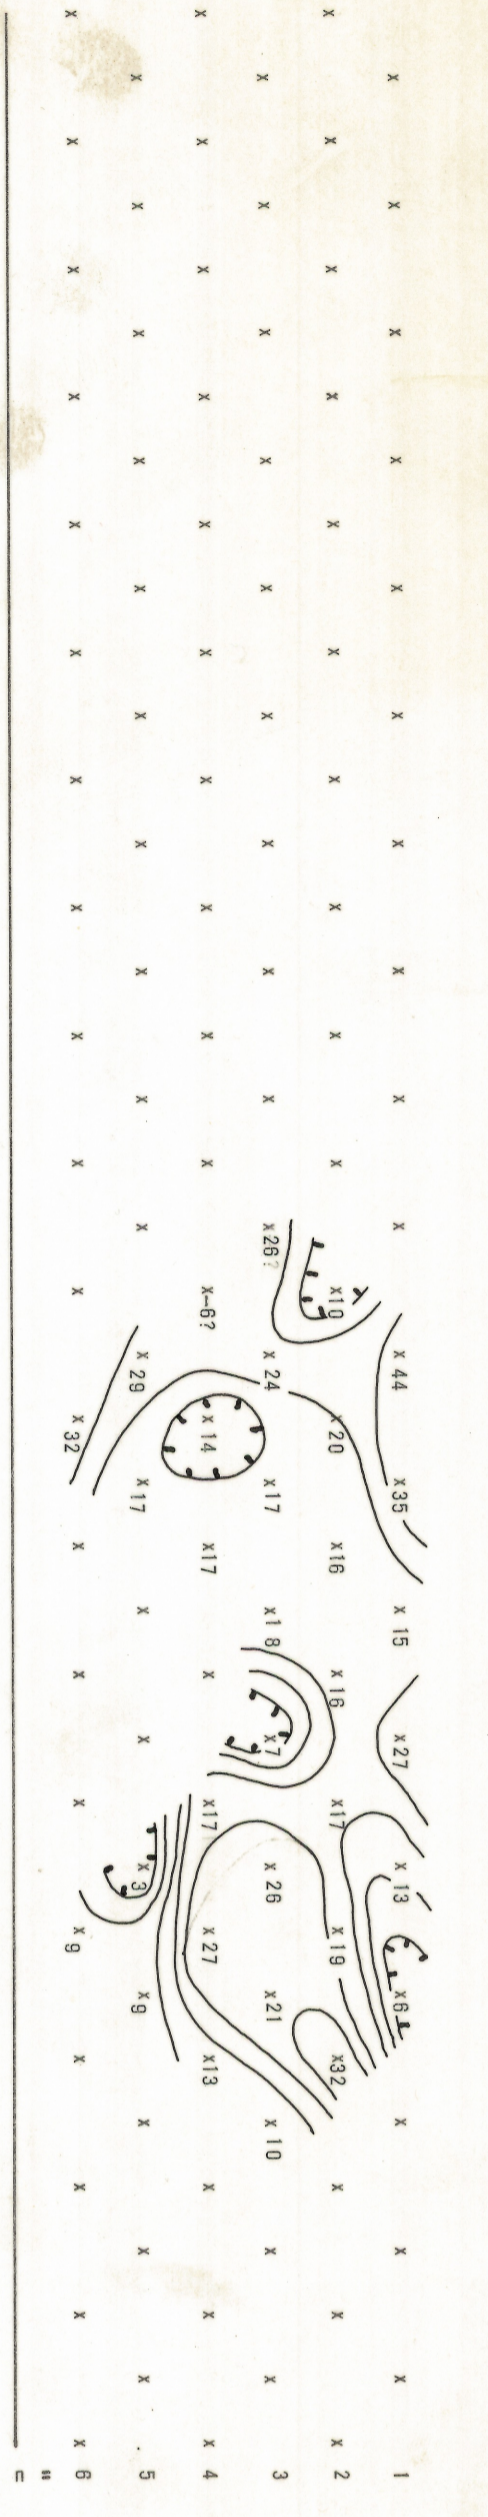


SELF POTENTIAL IN MILLIVOLTS

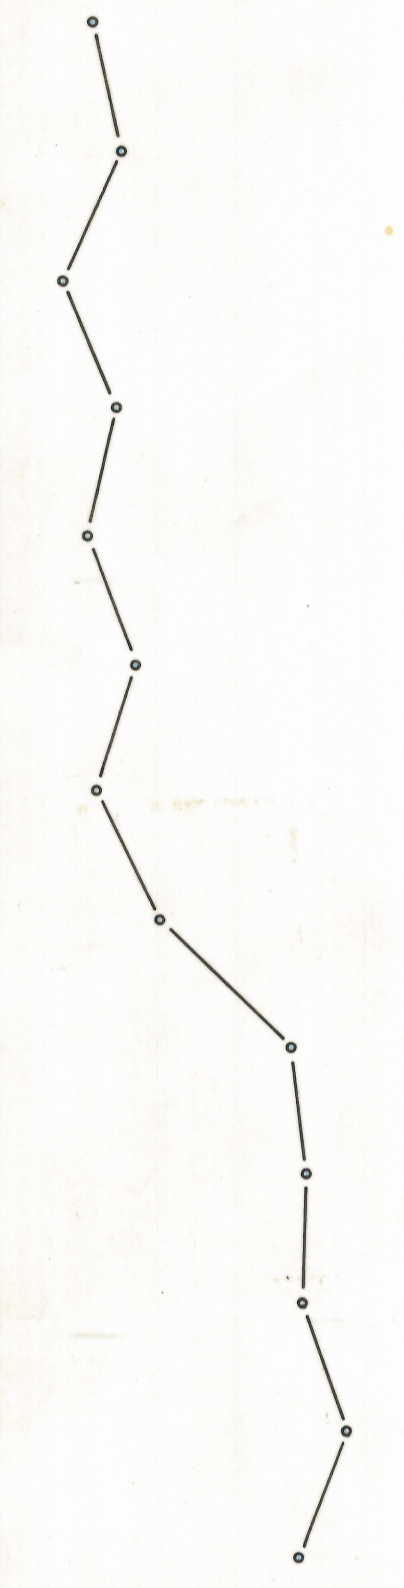


LINE NO.  
1  
SPREAD(S)

INDUCED POLARIZATION TRAVERSE  
SECTIONAL DATA SHEET  
for  
C F & I STEEL CORPORATION

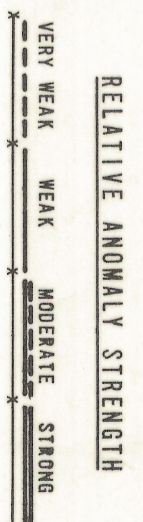

DIPLOLE DIPOLE ELECTRODE ARRAY

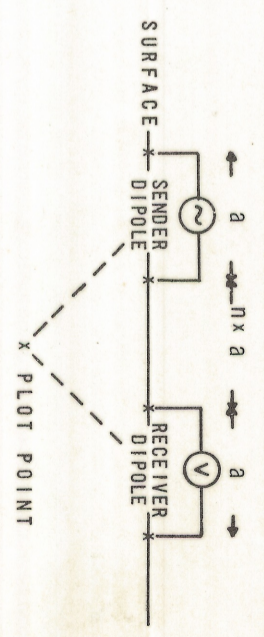

AREA  
GOSSAN PROJECT AREA

LOOKING  
NORTH

DATE  
MAY 1989

SCALE  
a = 500'

HEINRICHS  
**GEOEXPLORATION COMPANY** 377-69  
AUSTRALIA  
(SYDNEY)  
39 Hume Street  
Geophysical Crews Nest, NSW  
Phone: 435-1789  
ENGINEERS  
U.S.A.  
Post Office Box 5871  
Tucson, Arizona 85703  
Phone: (602) 823-0578  
Cable: GEDEX, Tucson

AGPH-050-20-105 H/K 38 10/11/89