


EXPLANATION

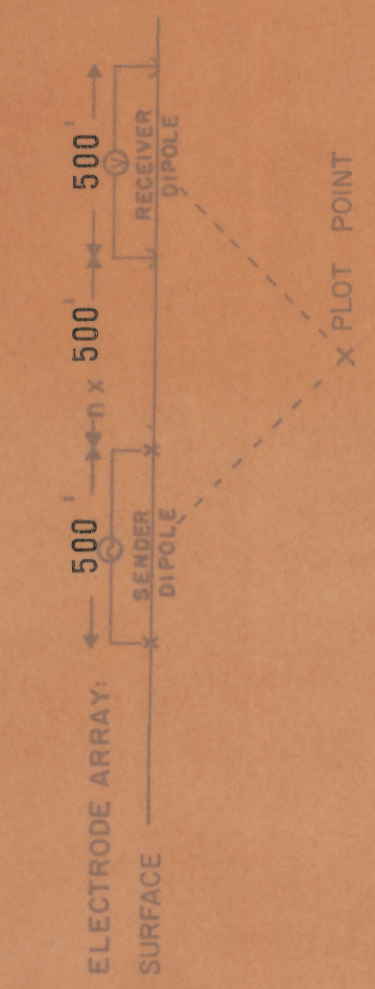

LOOKING WEST

CARMEN AREA

SECTIONAL DATA SHEET
 LINE NO. 1-2 (SPREADS 1 & 2)
 INDUCED POLARIZATION TRAVERSE
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: AUG 1968
 FOR GEOCHEMICAL SURVEYS

APPARANT RESISTIVITY (PFE) IN UNITS OF OHM FEET (21)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 CPS

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 CPS

APPARANT METALLIC CONDUCTION FACTOR (MCF) $MCF = \frac{PFE \times 1000}{21}$
 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL