

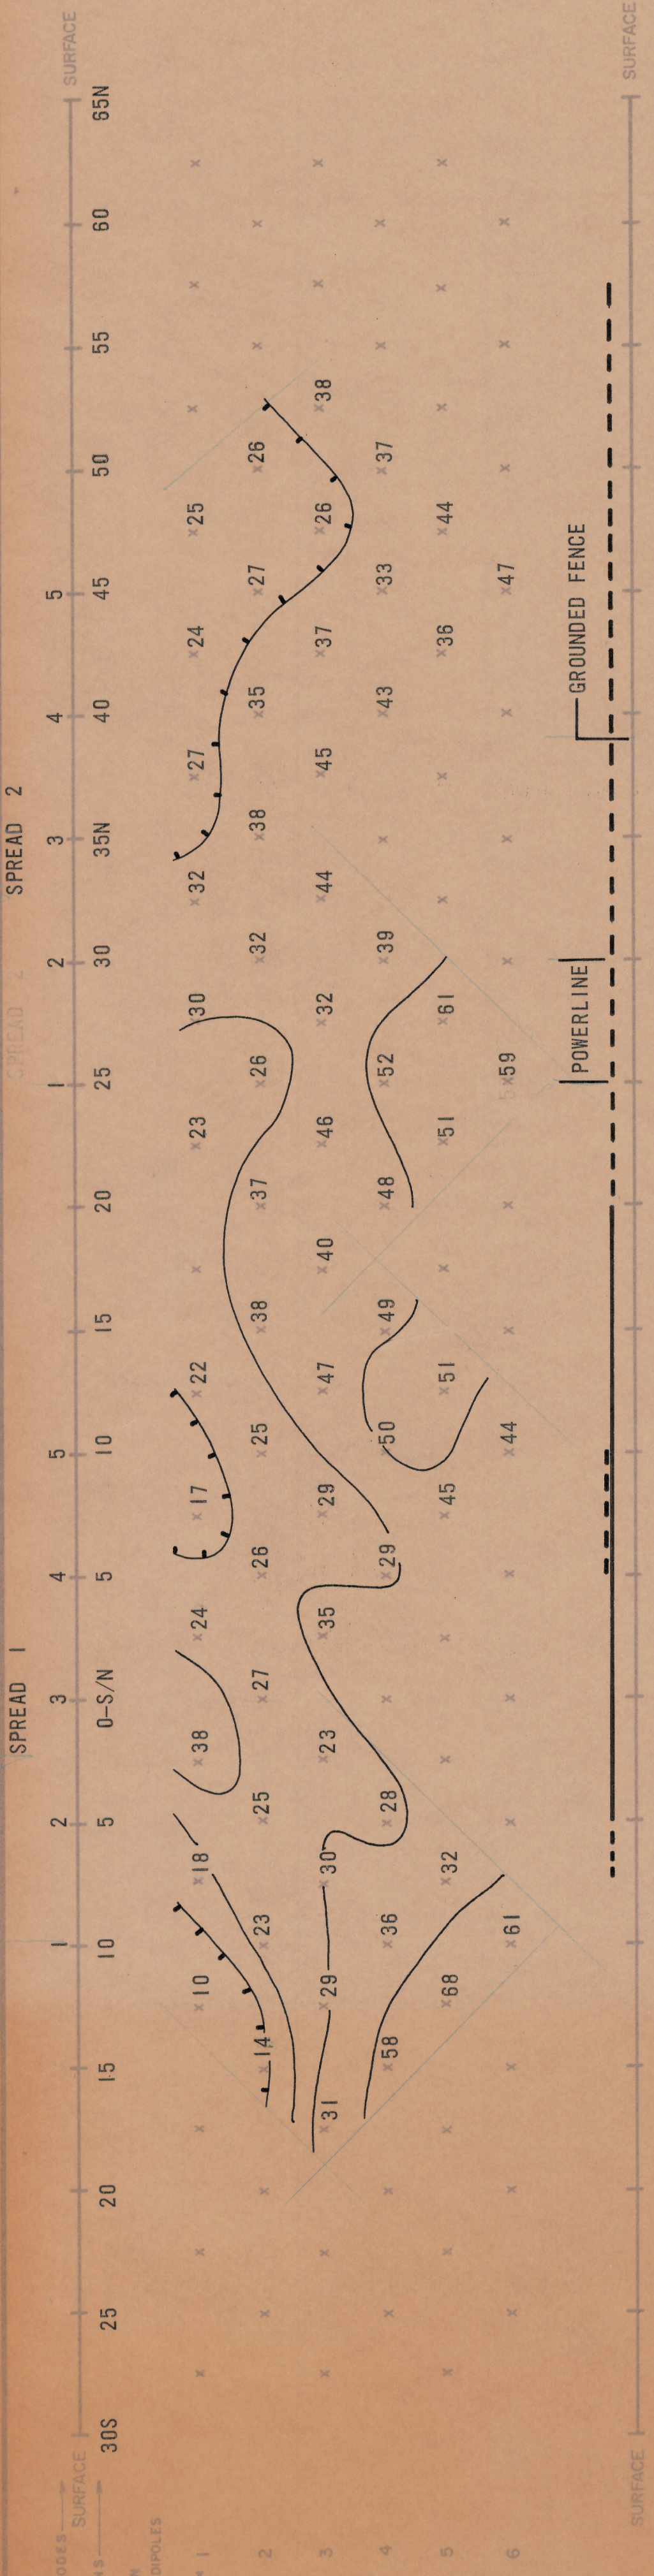


ELECTRODES SURFACE
STATIONS
D. INTERVAL BETWEEN
SENDER & RECEIVER DIPOLES

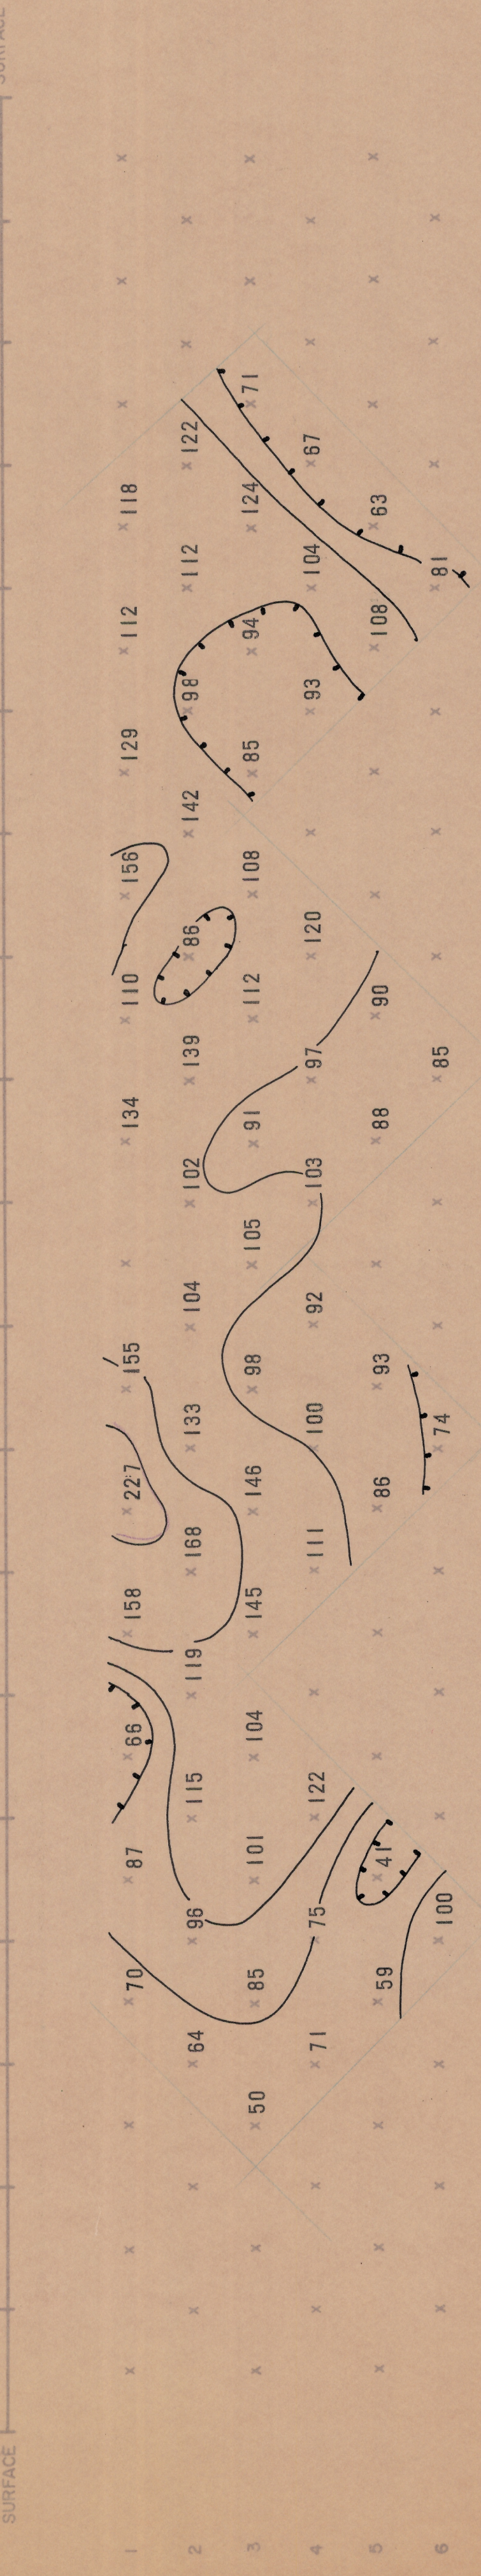

APPARENT RESISTIVITY (P) IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 CPS

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 CPS

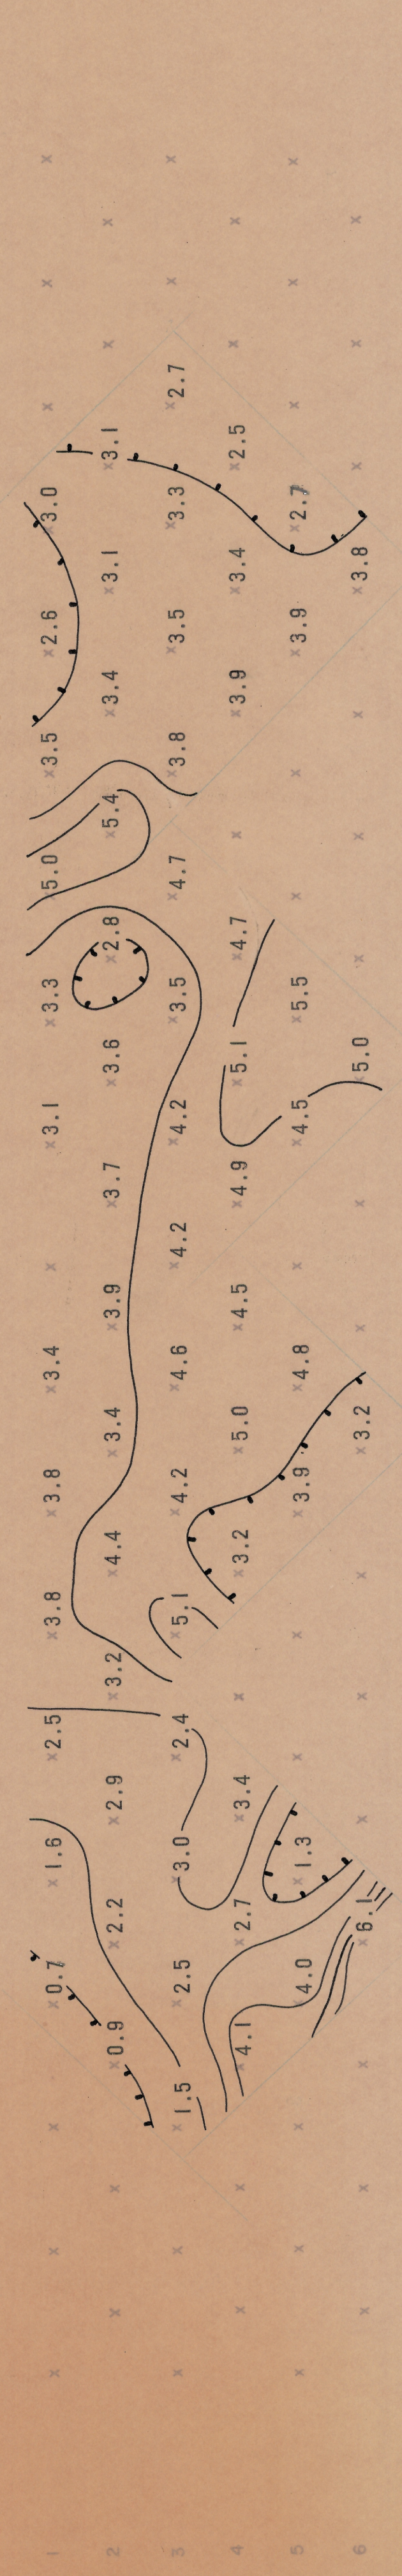


APPARENT "METALLIC CONDUCTION" FACTOR (MCF) $(MCF = \frac{PFE \times 1000}{P})$
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCIES: 0.05 & 3.0 CPS

SELF POTENTIAL



EXPLANATION

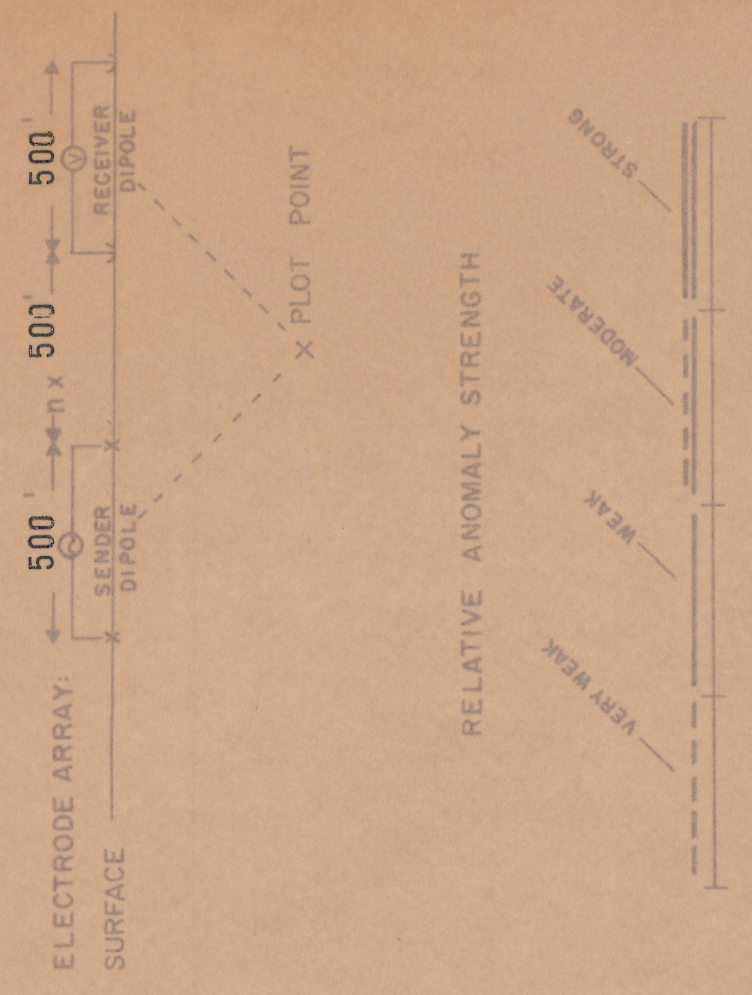

LOOKING WEST

CARMEN AREA
SECTIONAL DATA SHEET
LINE NO. 2-1 (SPREADS 1 & 2)
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: AUG 1968
FOR
GEOCHEMICAL SURVEYS