


EXPLANATION

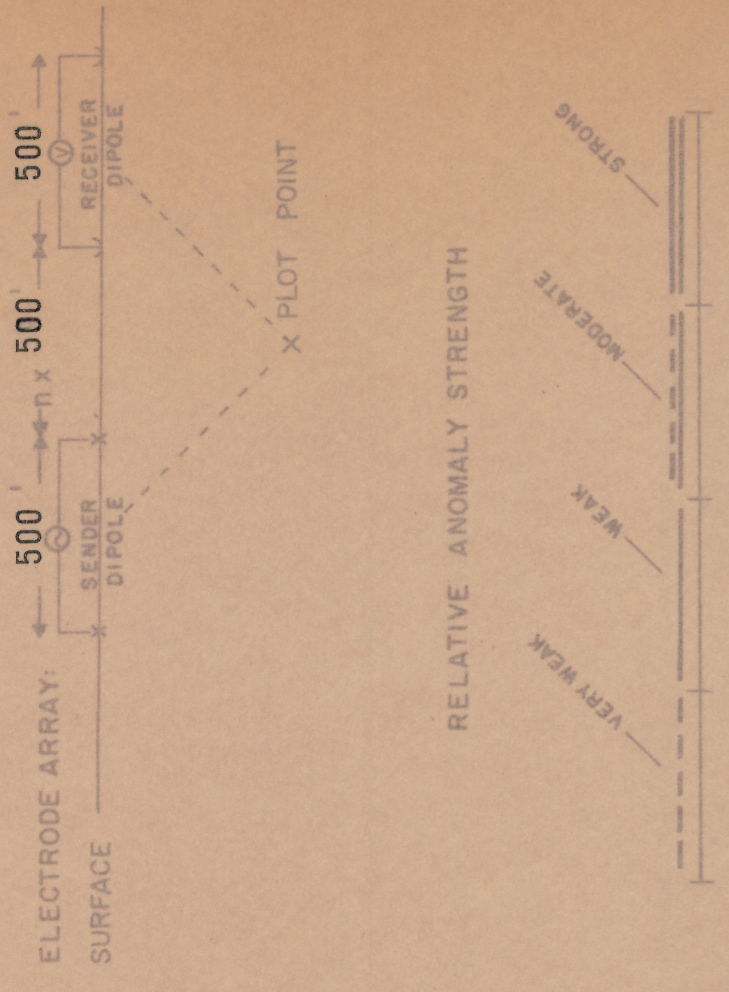

LOOKING WEST

CARMEN AREA

SECTIONAL DATA SHEET
 LINE NO. 2-2 (SPREADS 1 & 2)
 INDUCED POLARIZATION TRAVERSE
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: AUG 1968
 FOR
 GEOCHEMICAL SURVEYS

APPARENT RESISTIVITY (ρ_a) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 CPS

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 CPS

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)

$$MCF = \frac{PFE}{\rho_a} \times 1000$$

 CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

