



SPREAD 1



SURFACE |-----| SURFACE

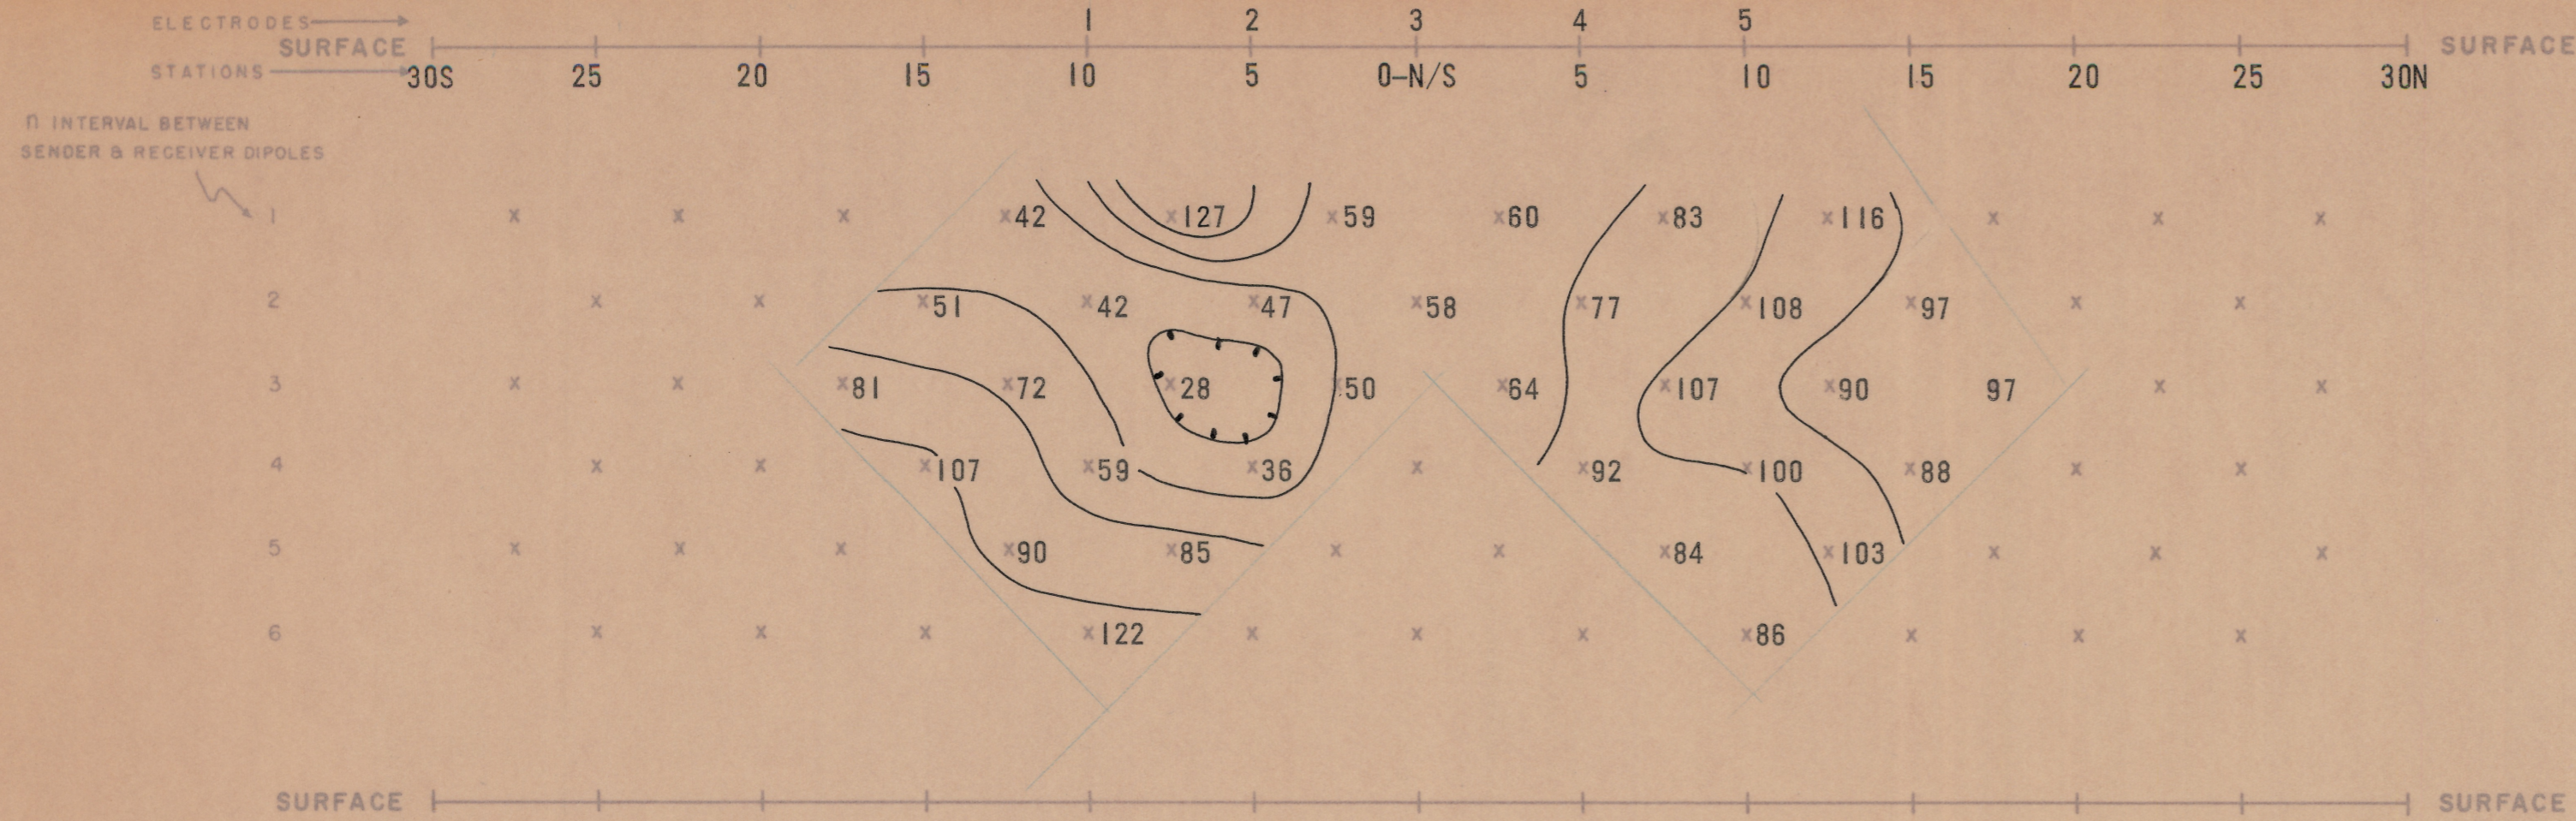

SURFACE |-----| SURFACE

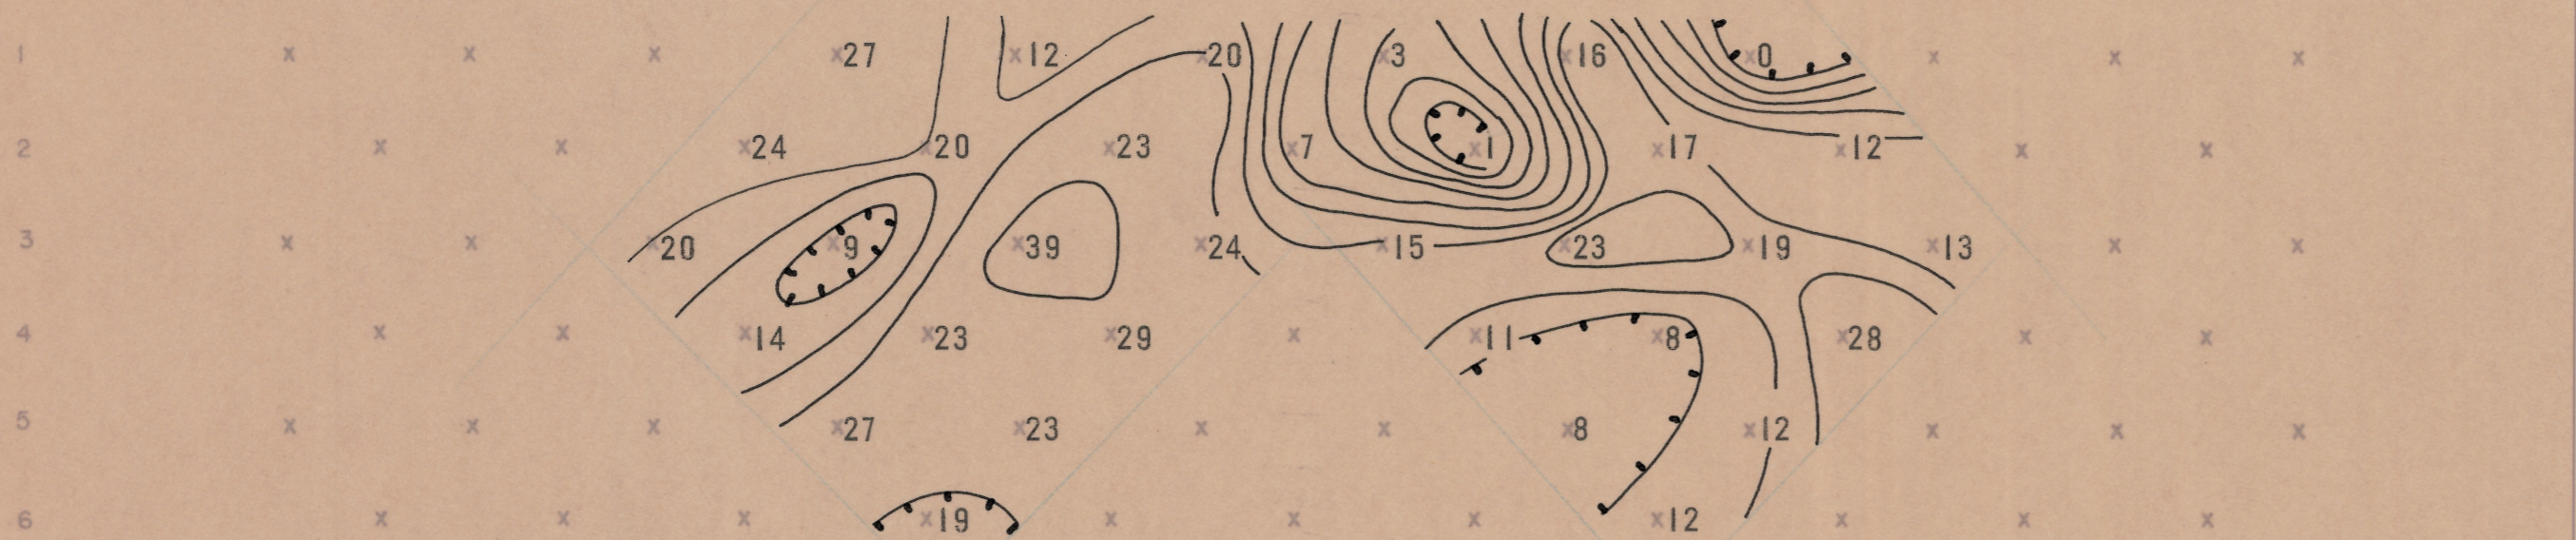


APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps.

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps


APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF =  $\frac{\rho_{DC}}{\rho_{AC}}$ )  
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

EXPLANATION

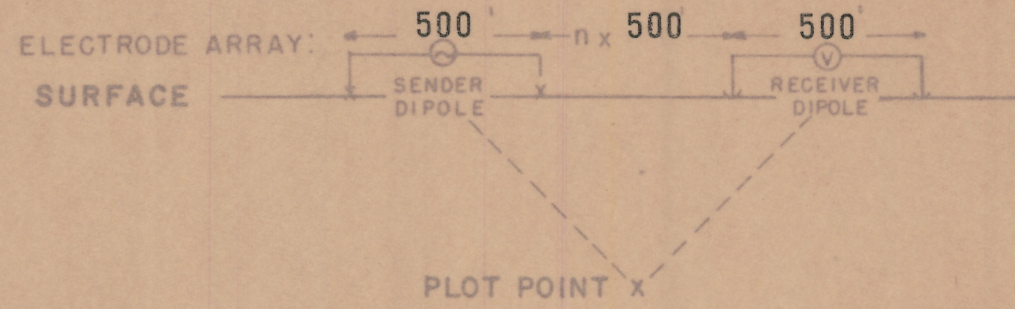

RELATIVE ANOMALY STRENGTH

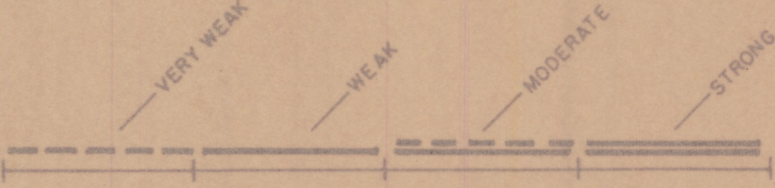

LOOKING WEST

CARMEN AREA

SECTIONAL DATA SHEET

LINE NO. 3-1 (SPREAD 1)

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500'

DATE: JULY 1968

FOR

GEOCHEMICAL SURVEYS

