



APPARENT RESISTIVITY (ρ_{DC})
 IN UNITS OF OHM FEET $\frac{2\pi t}{t}$
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

EXPLANATION

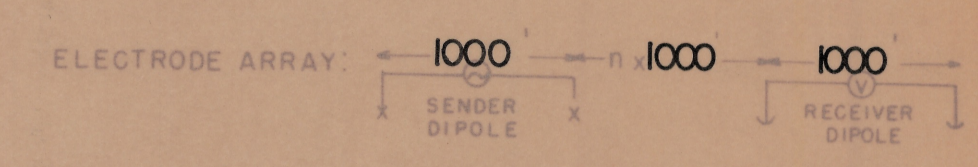


RELATIVE ANOMALY STRENGTH

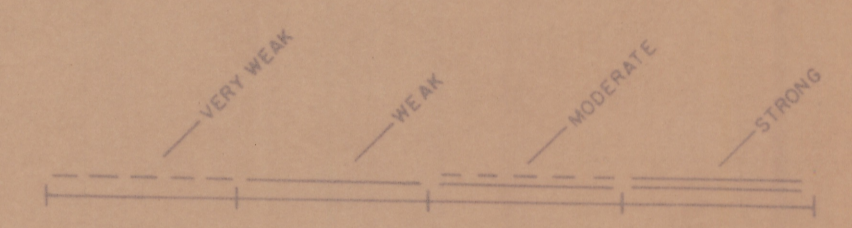

LOOKING NORTH

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

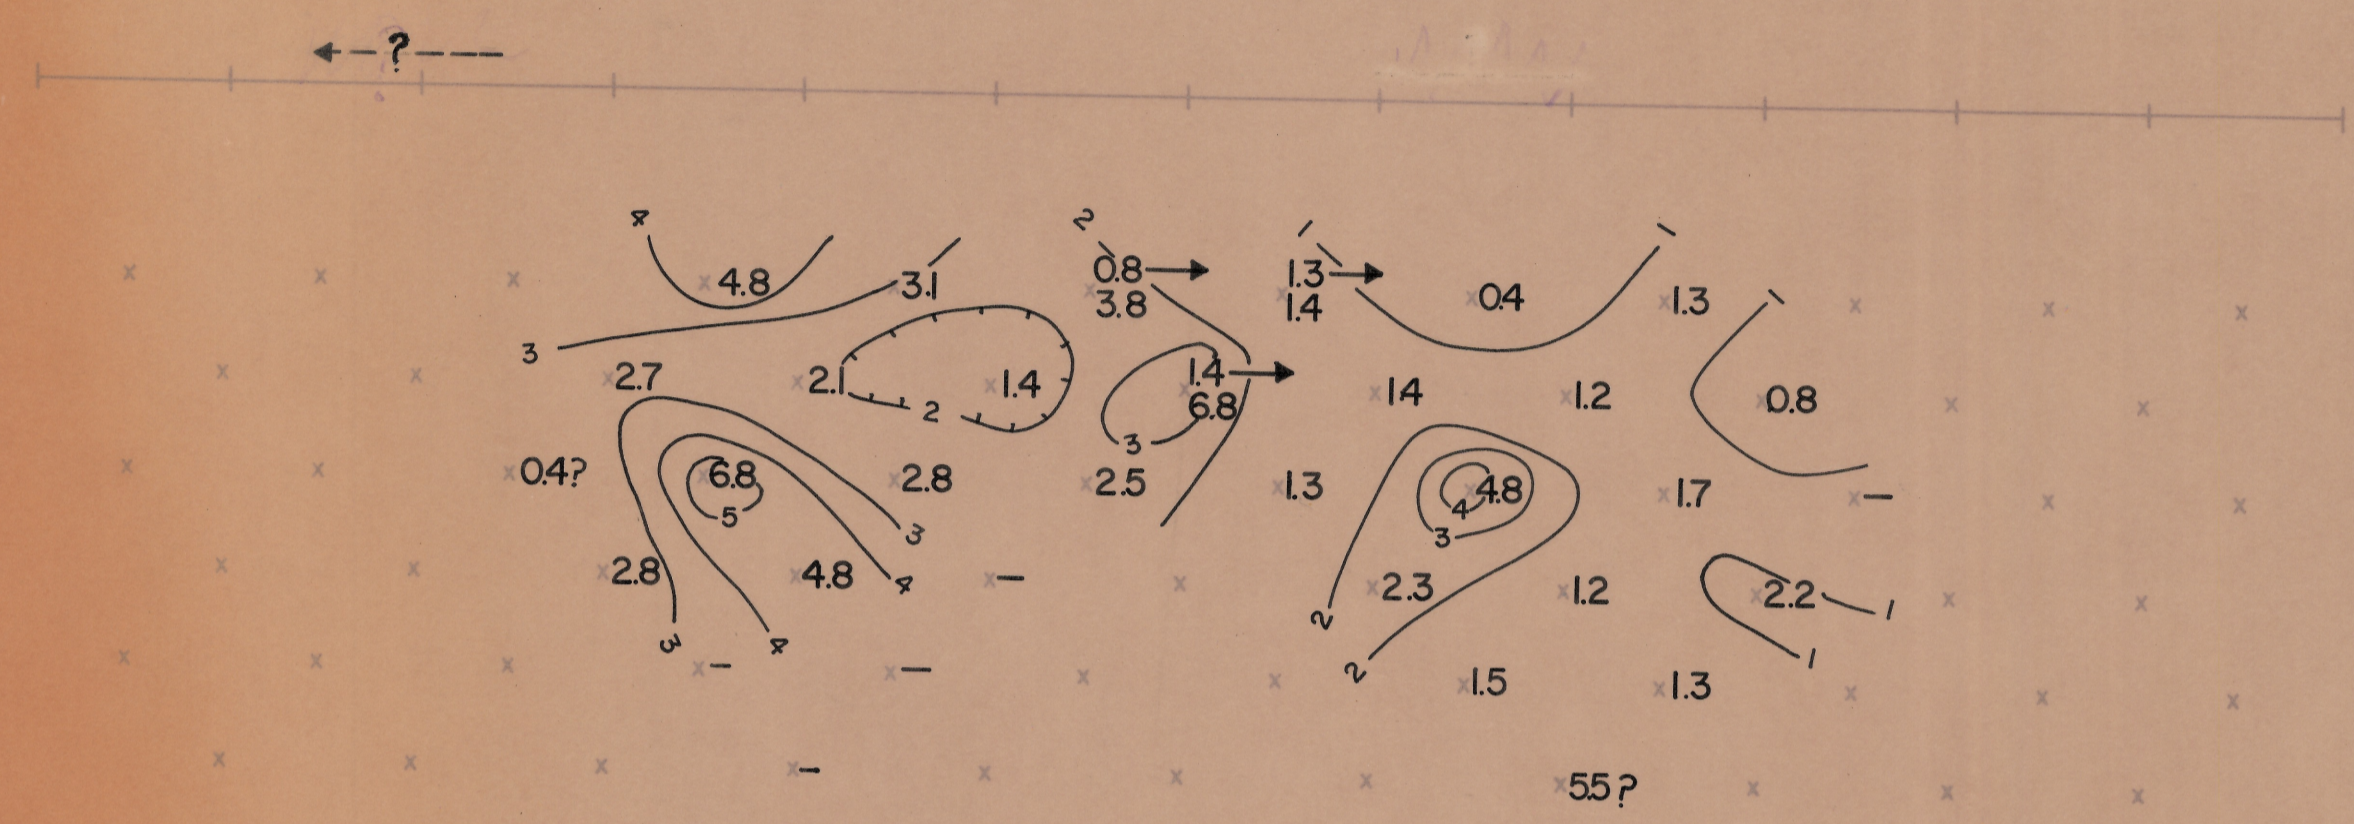

HUALAPAI AREA

SECTIONAL DATA SHEET

LINE NO. 2

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JULY 1966


FOR

THE HANNA MINING CO.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $(MCF = \frac{PFE \times 1000}{\rho_{DC} \frac{2\pi t}{t}})$
 CONTOUR INTERVAL LOGARITHMIC

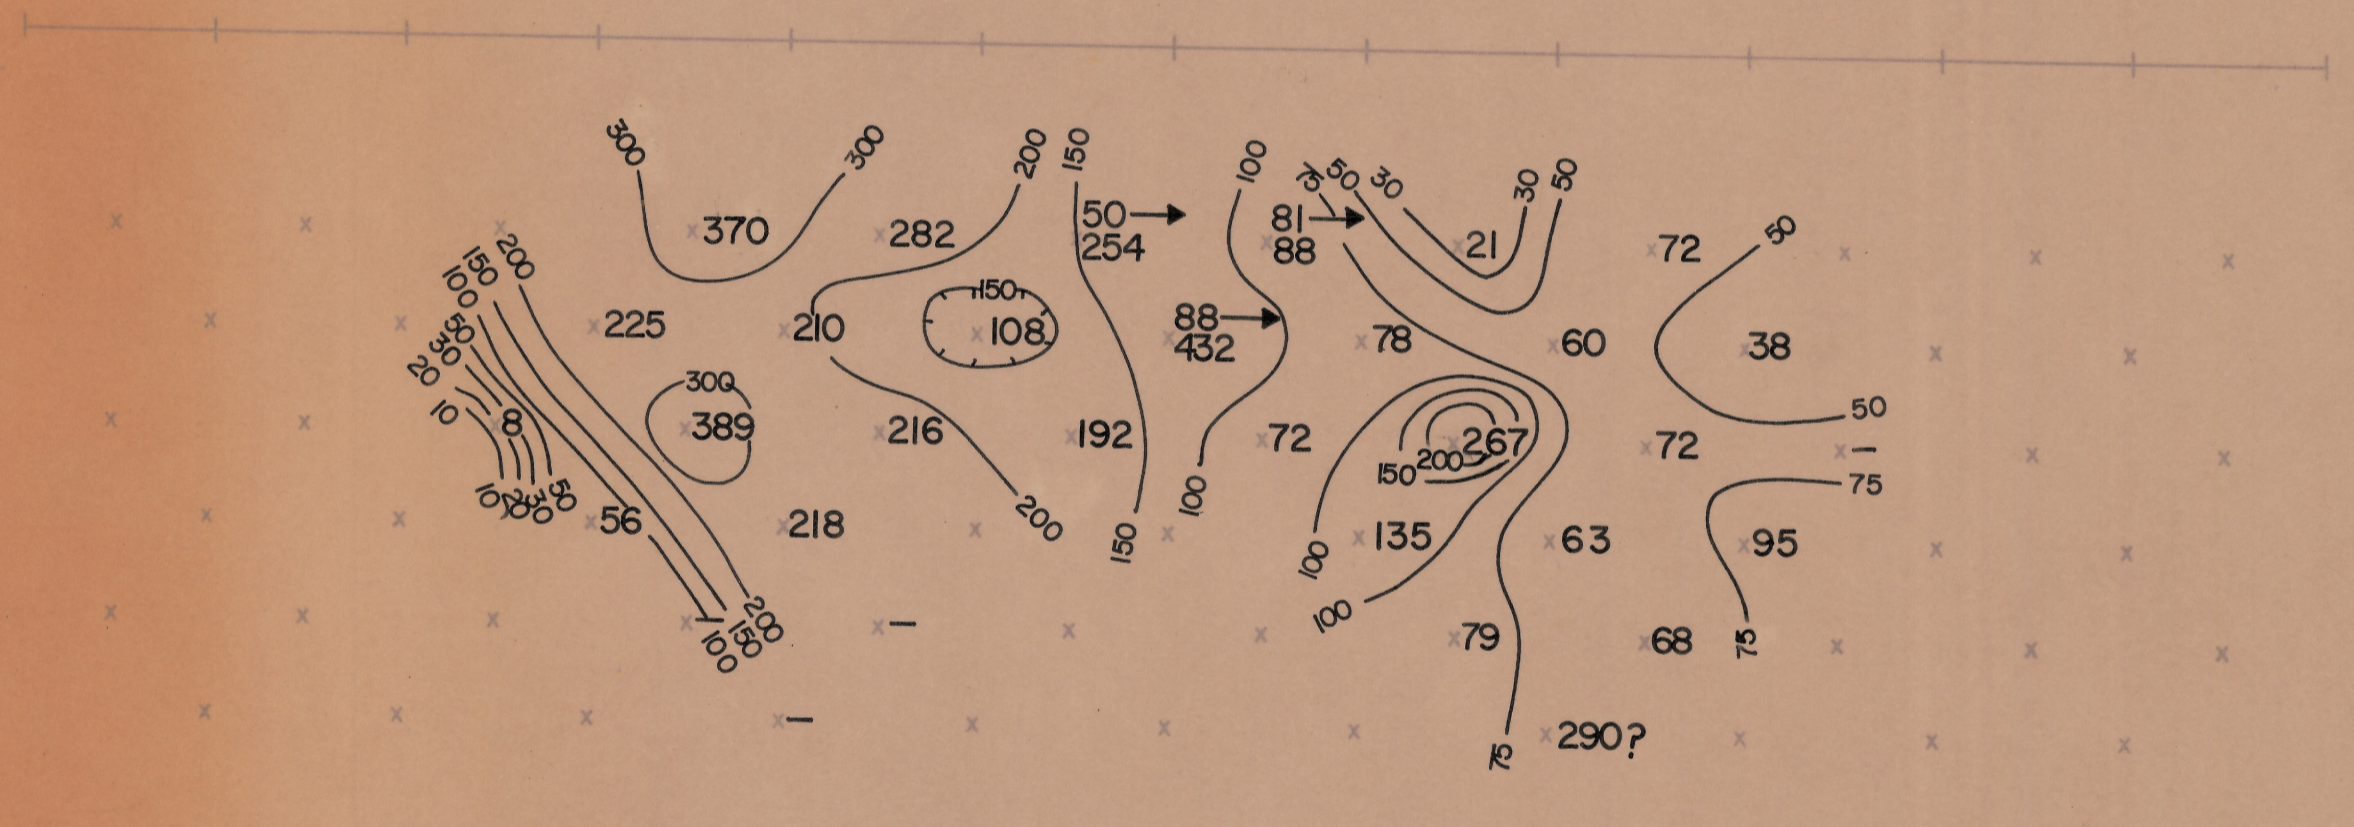

SELF POTENTIAL

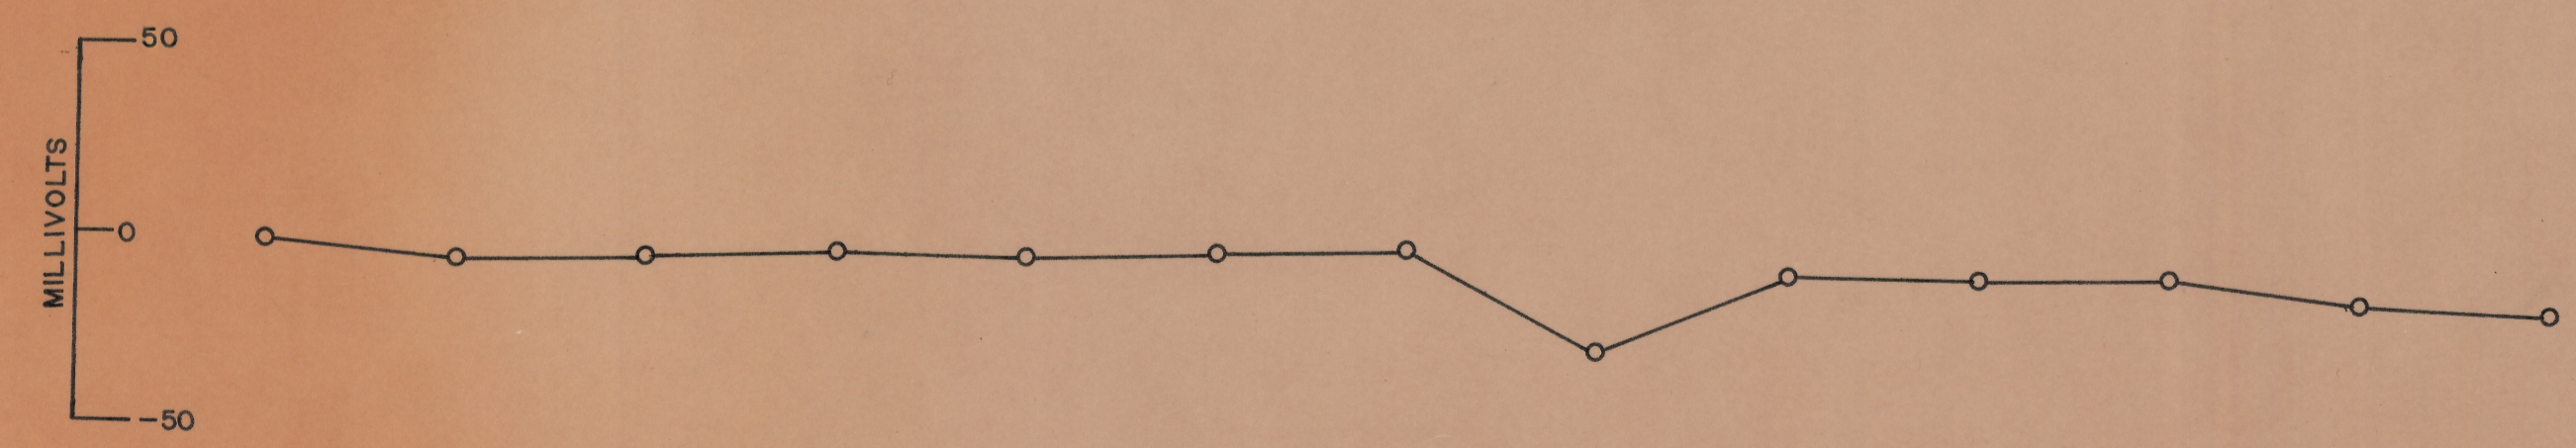

2140-190-20-107 H/H/30 1/2/66