

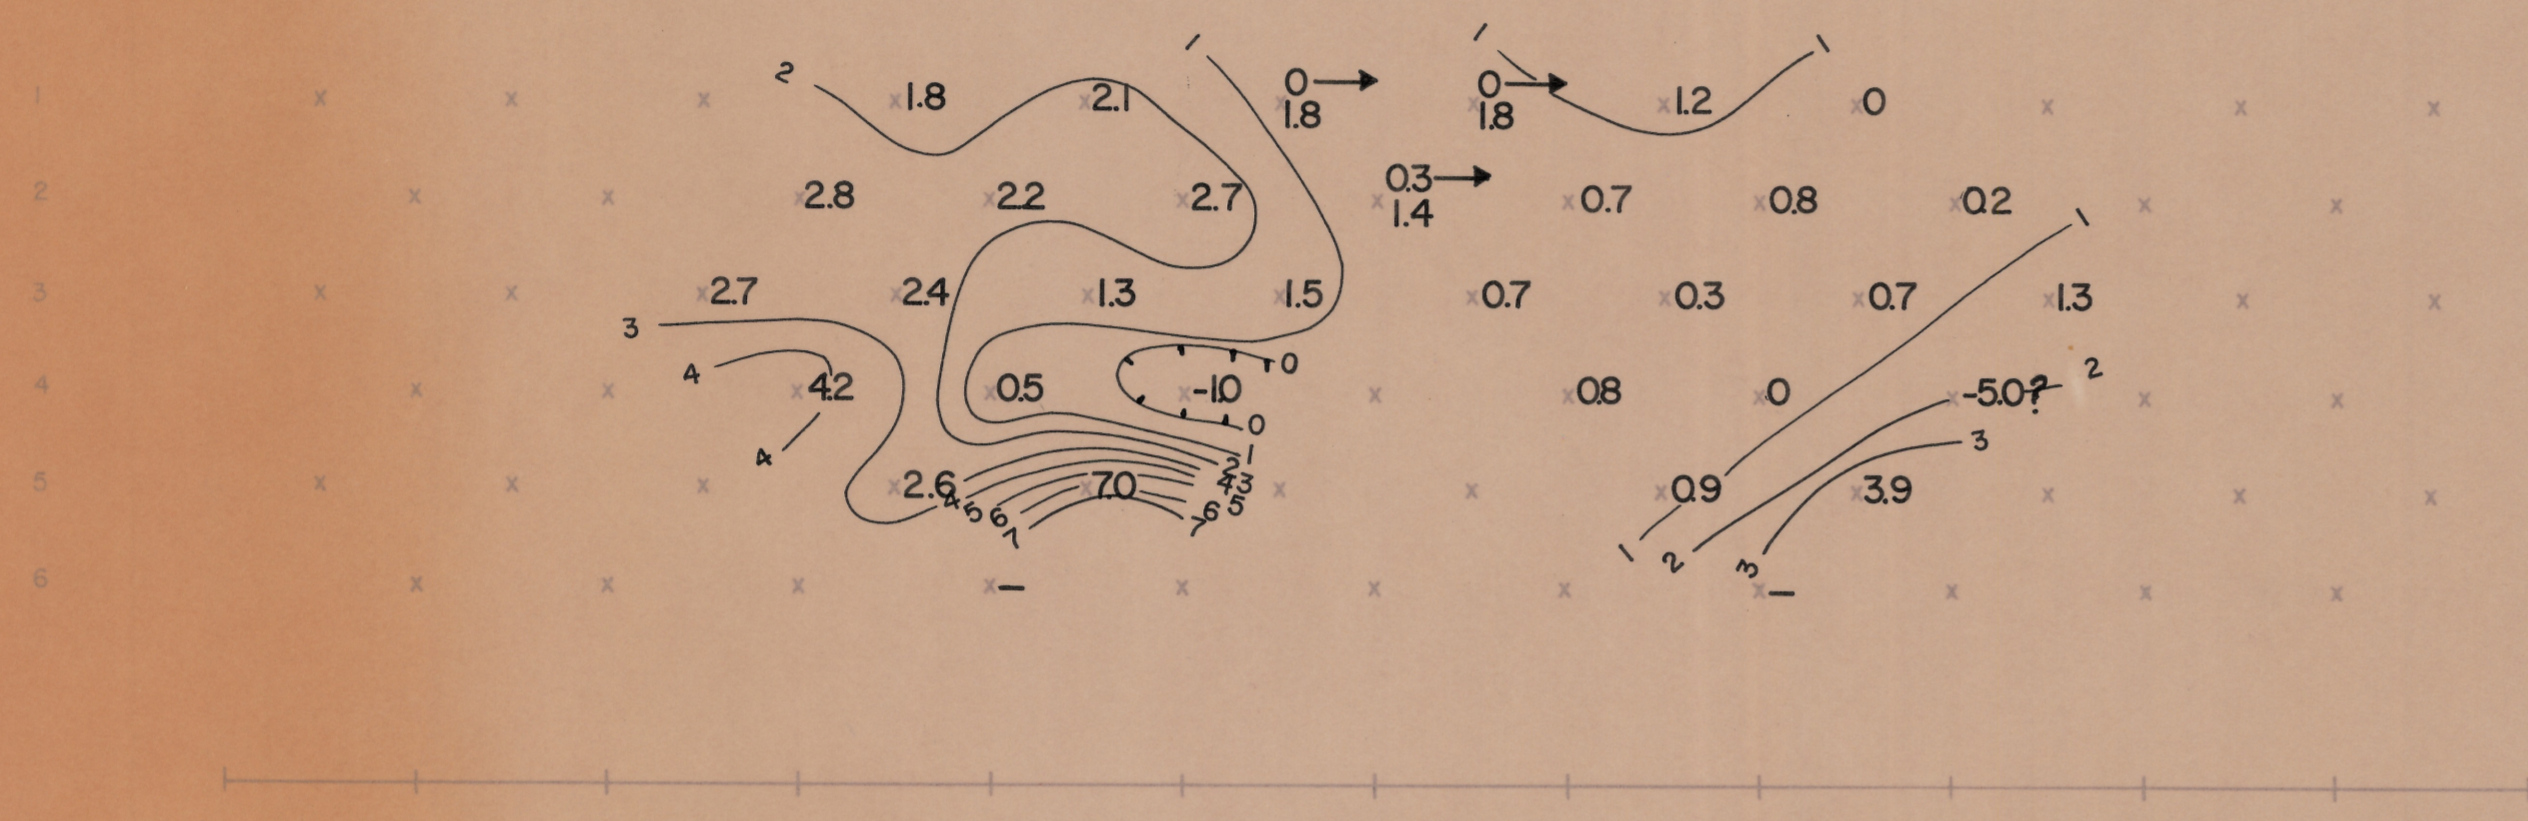
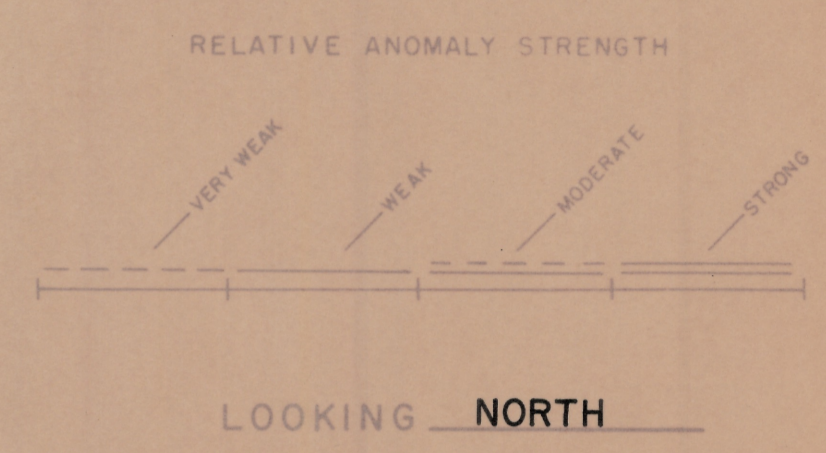


APPARENT RESISTIVITY (ρ_{DC})
IN UNITS OF OHM FEET $\frac{1}{100}$
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.

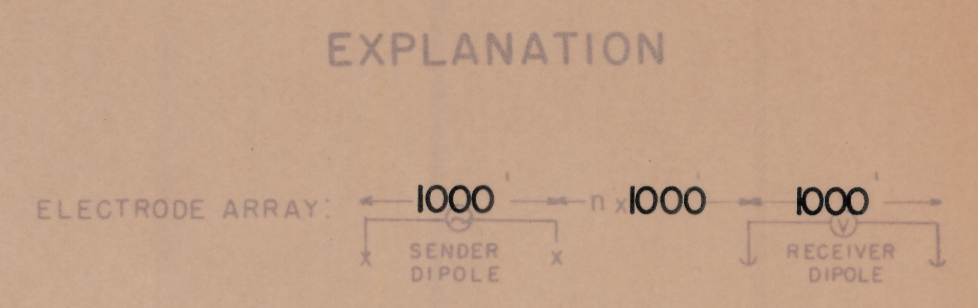


PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

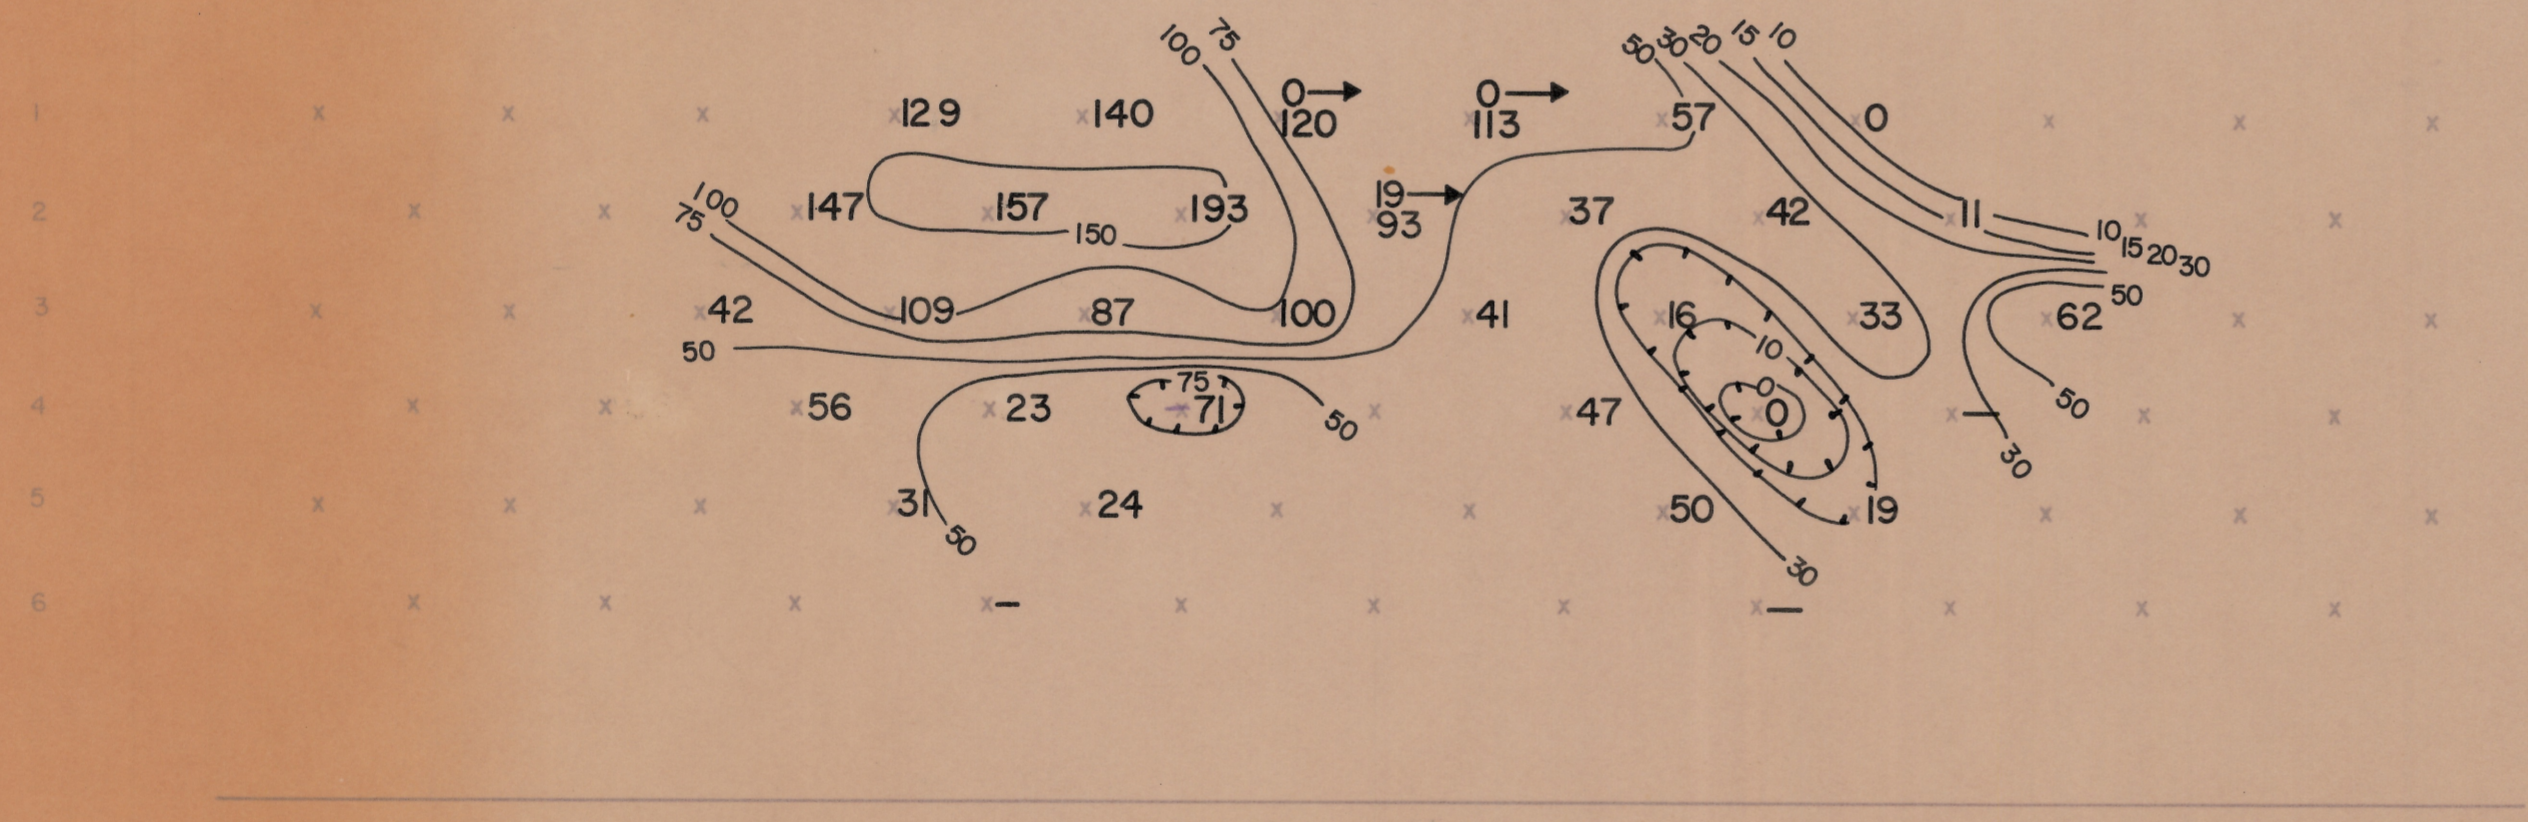

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = $\frac{\rho_{DC}}{PFE \times 1000}$)
CONTOUR INTERVAL LOGARITHMIC

HUALAPAI AREA
SECTIONAL DATA SHEET
LINE NO. 3
INDUCED POLARIZATION TRAVERSE
HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: JULY, 1966
FOR
THE HANNA MINING CO.

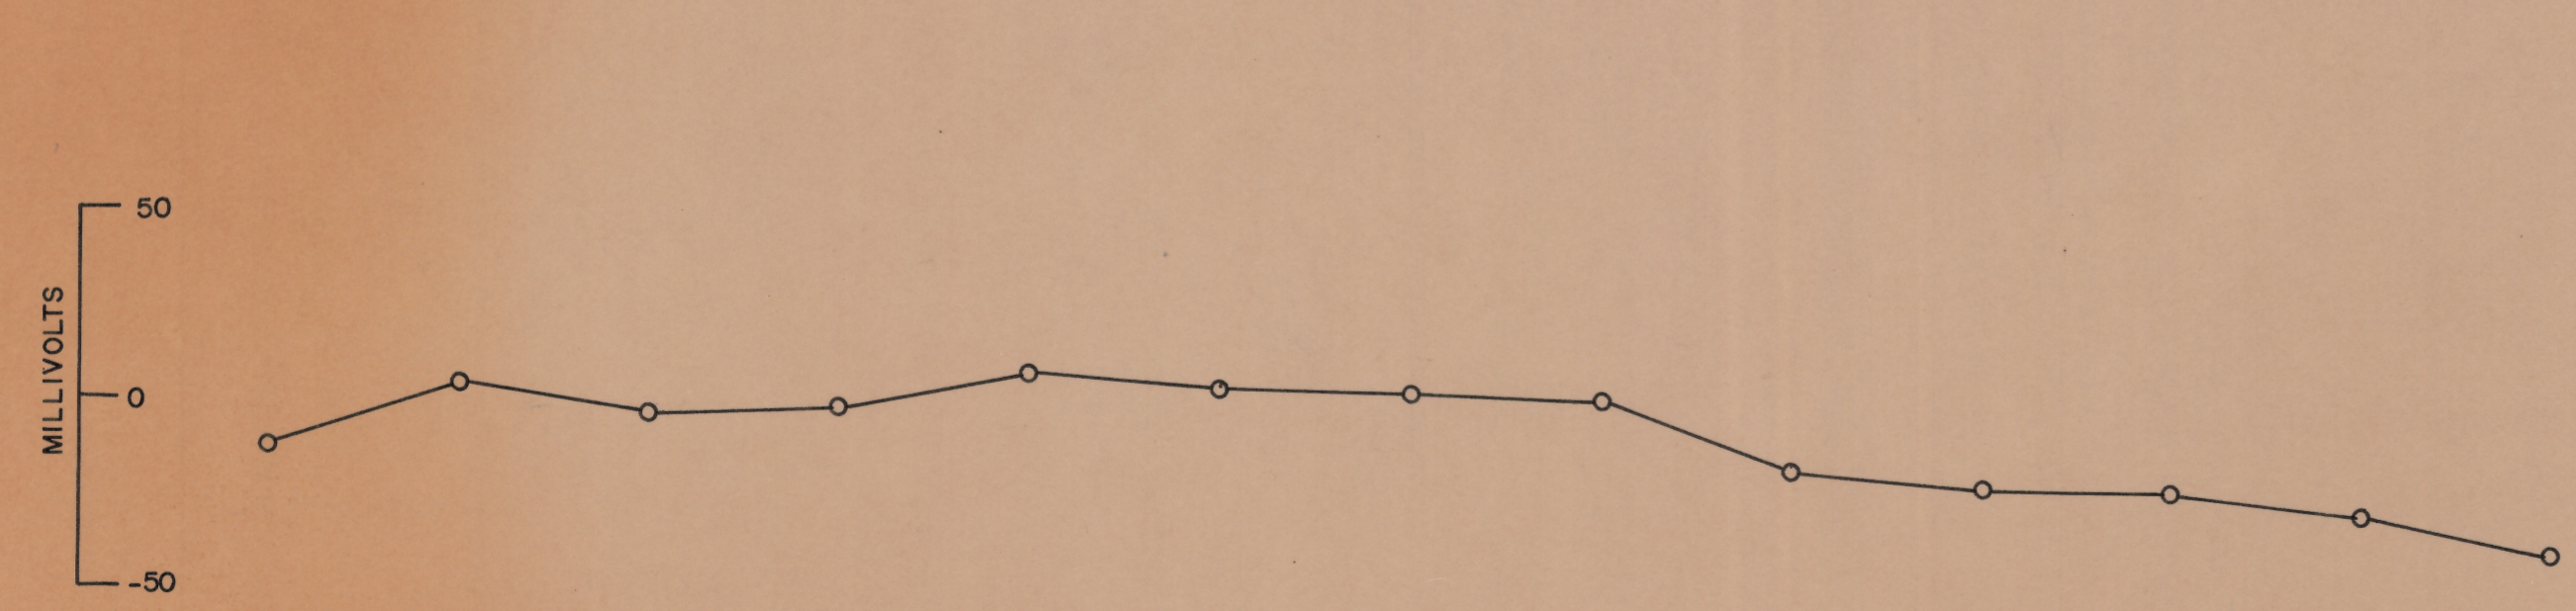

1110-960-20-107 11/10/66