

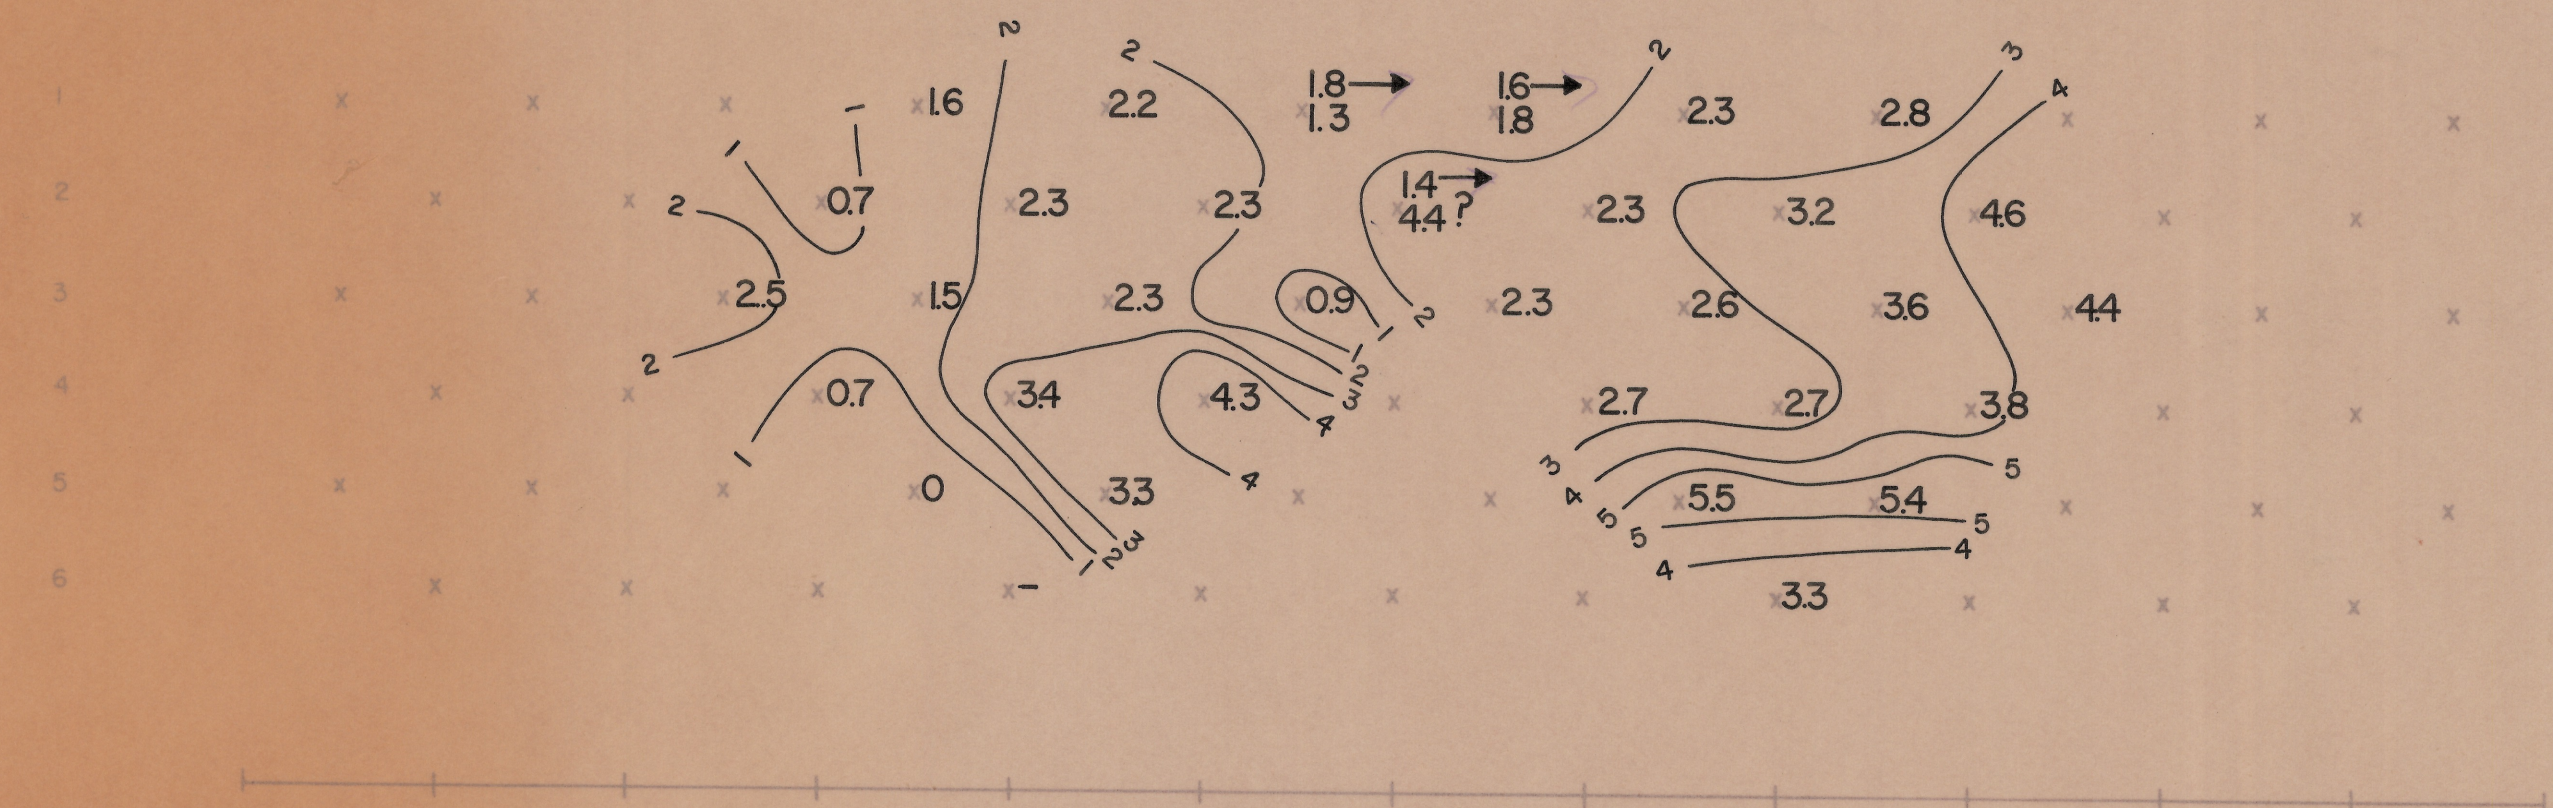
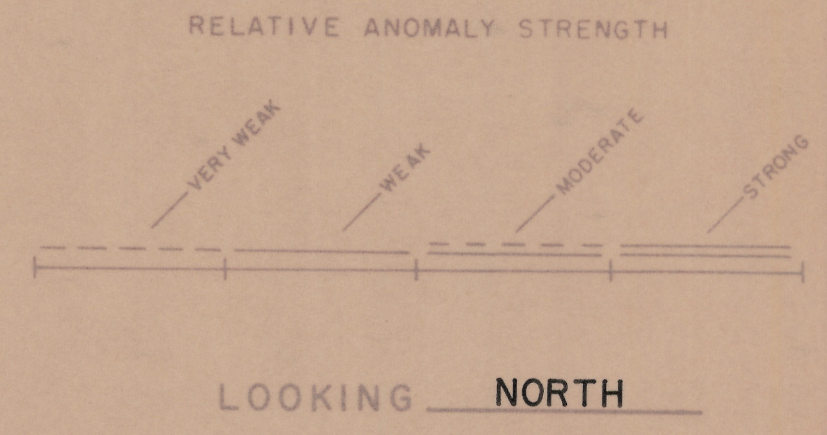


APPARENT RESISTIVITY (ρ_{DC})
 IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

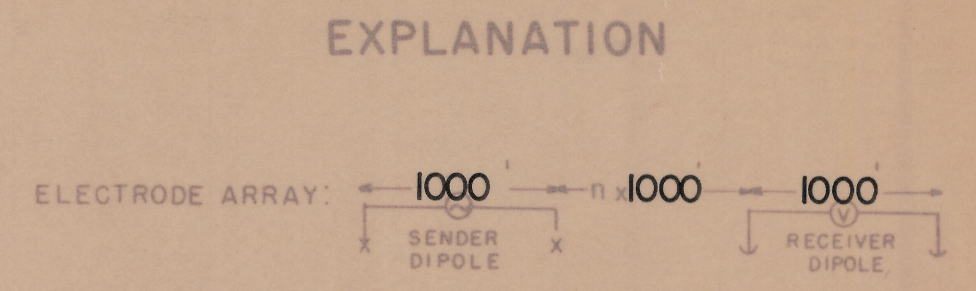


PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

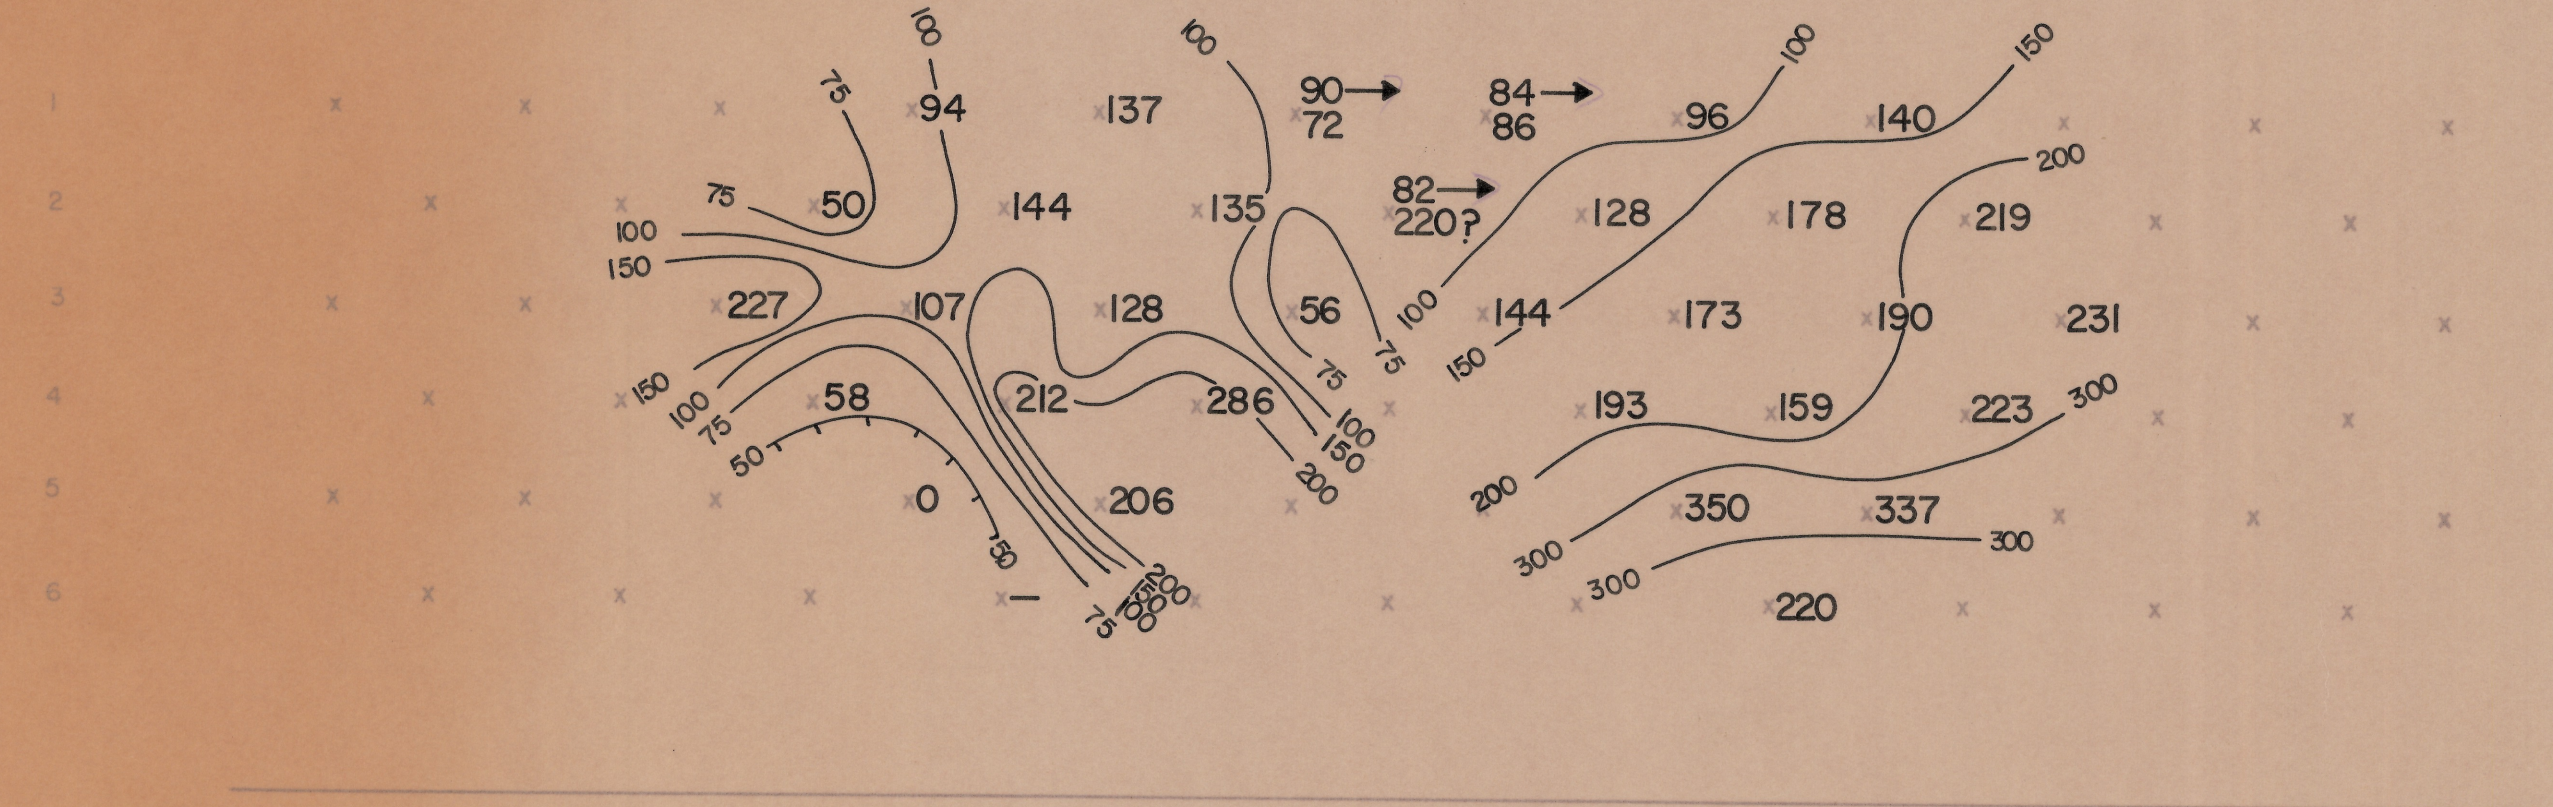

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 (MCF = PFE x 1000)
 CONTOUR INTERVAL LOGARITHMIC

HUALAPAI AREA
 SECTIONAL DATA SHEET
 LINE NO. 4
 INDUCED POLARIZATION TRAVERSE
 HEINRICH'S GEOEXPLORATION COMPANY
 SCALE: 1" = 1000 DATE: JULY 1966
 FOR
 THE HANNA MINING CO.

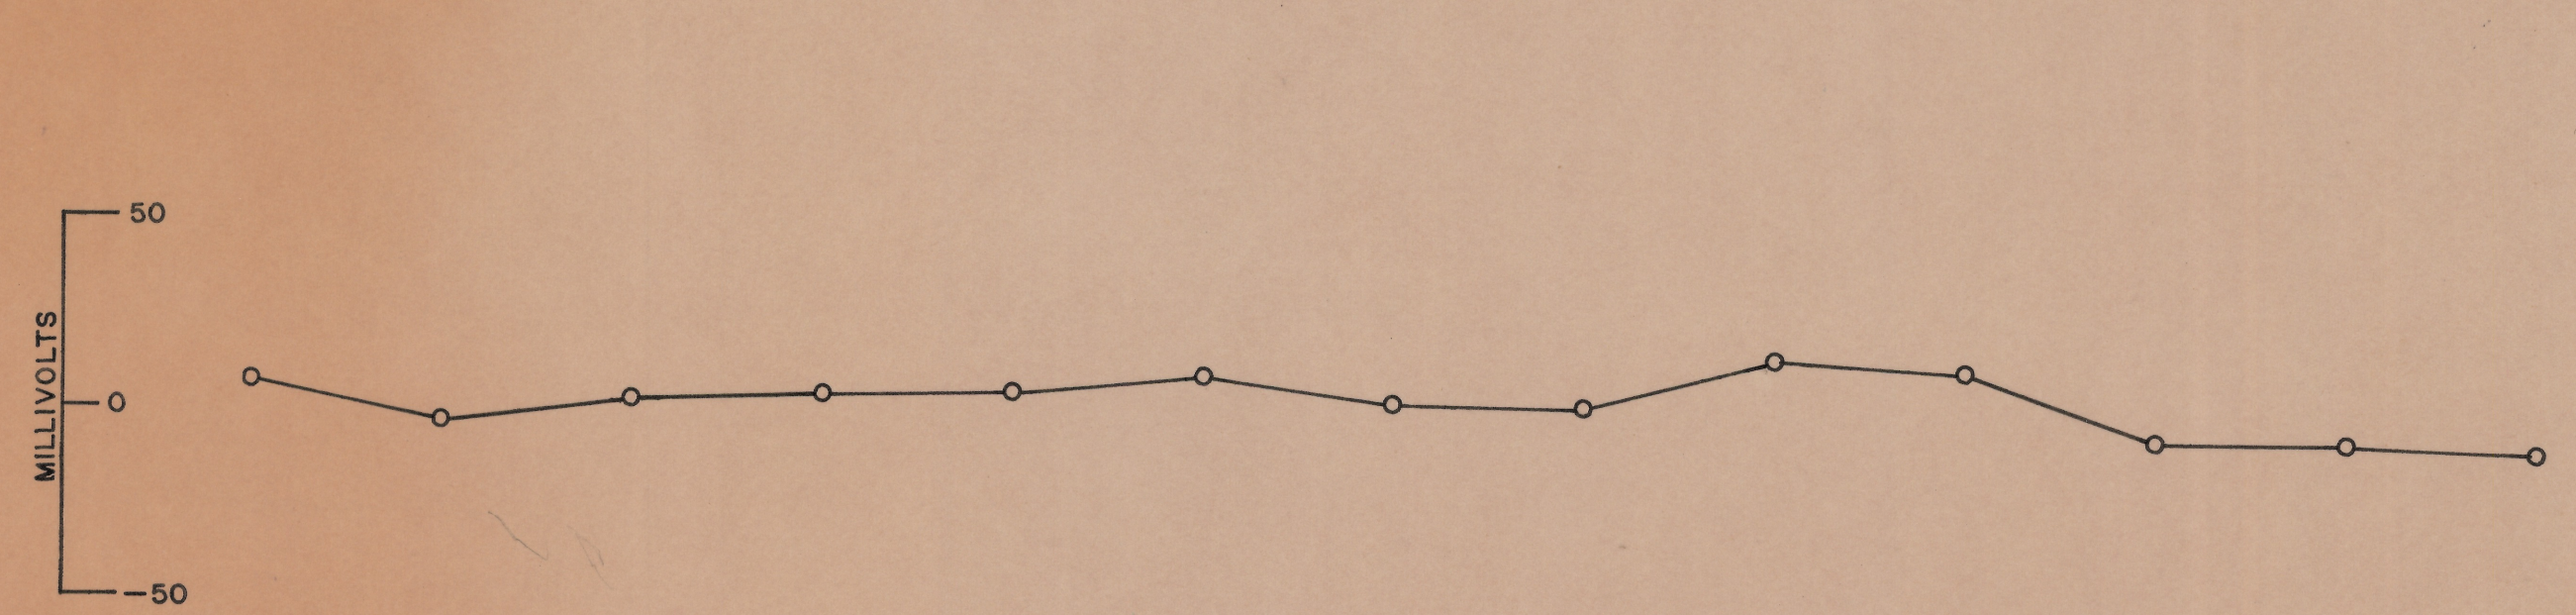

7170-100-20101-11118-10118