


APPARENT RESISTIVITY ( $\rho_a$ )  
IN UNITS OF OHM FEET CM  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps.


PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 1.0 cps.

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
(MCF =  $\frac{\rho_a}{\rho_{DC}} \times 1000$ )  
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

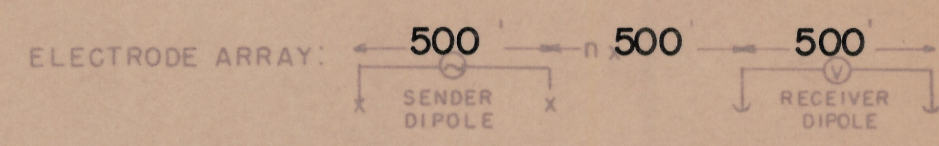

RELATIVE ANOMALY STRENGTH

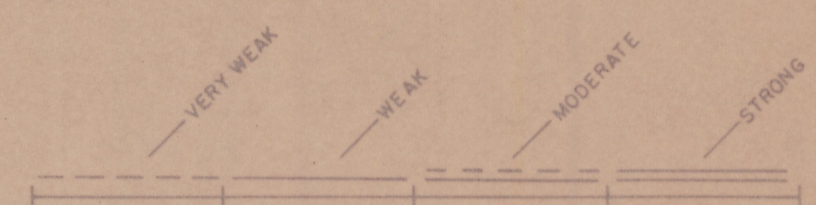

LOOKING NE

HUALAPAI AREA

SECTIONAL DATA SHEET

LINE NO. 5

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500'

DATE: JULY 1966

FOR

THE HANNA MINING CO.

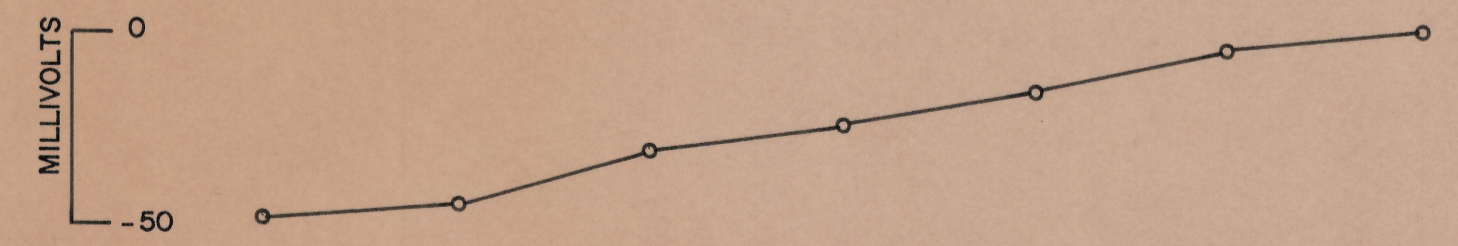

SELF POTENTIAL



4140-250-20-105 H/P AA LHM:MS