



APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET 211

CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 C.P.S.

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)  
(MGF =  $\frac{PFE \times 1000}{\rho_{DC}}$ )  
CONTOUR INTERVAL LOGARITHMIC

EXPLANATION

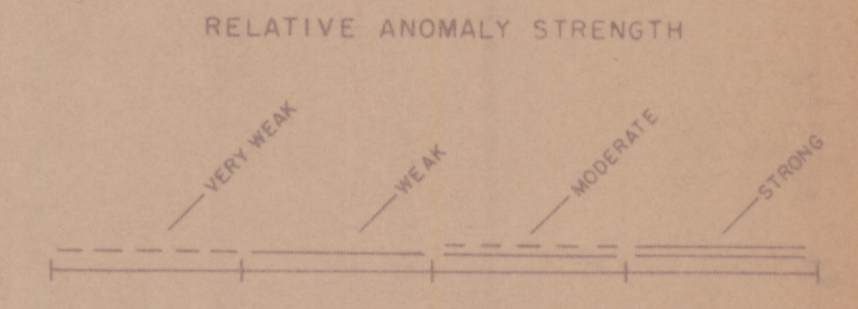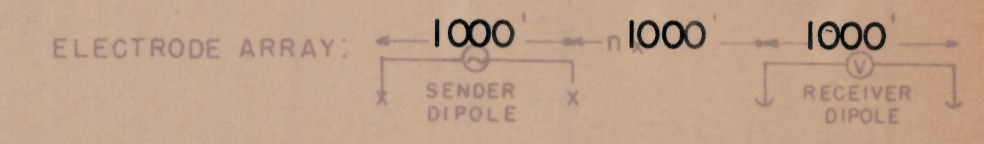

LOOKING N

HUALAPAI AREA

SECTIONAL DATA SHEET

LINE NO. 5

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 1000' DATE: JULY 1966

FOR

THE HANNA MINING CO.

SELF POTENTIAL

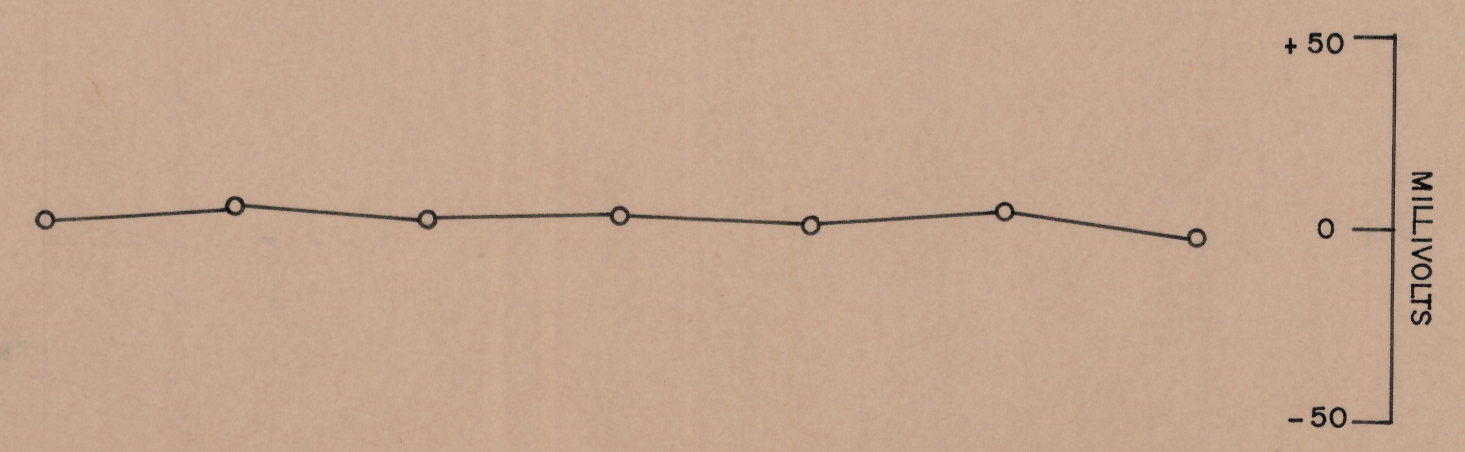

Handwritten notes at the bottom right of the page.