



APPARENT RESISTIVITY (ρ_{DA})
IN UNITS OF OHM FEET (FT)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.


EXPLANATION

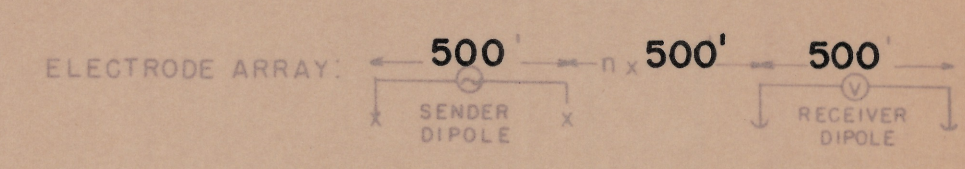

RELATIVE ANOMALY STRENGTH

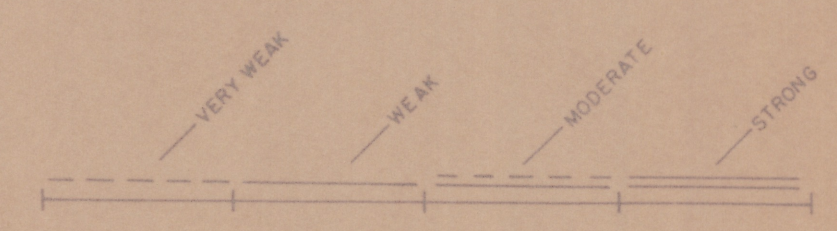

LOOKING NORTH

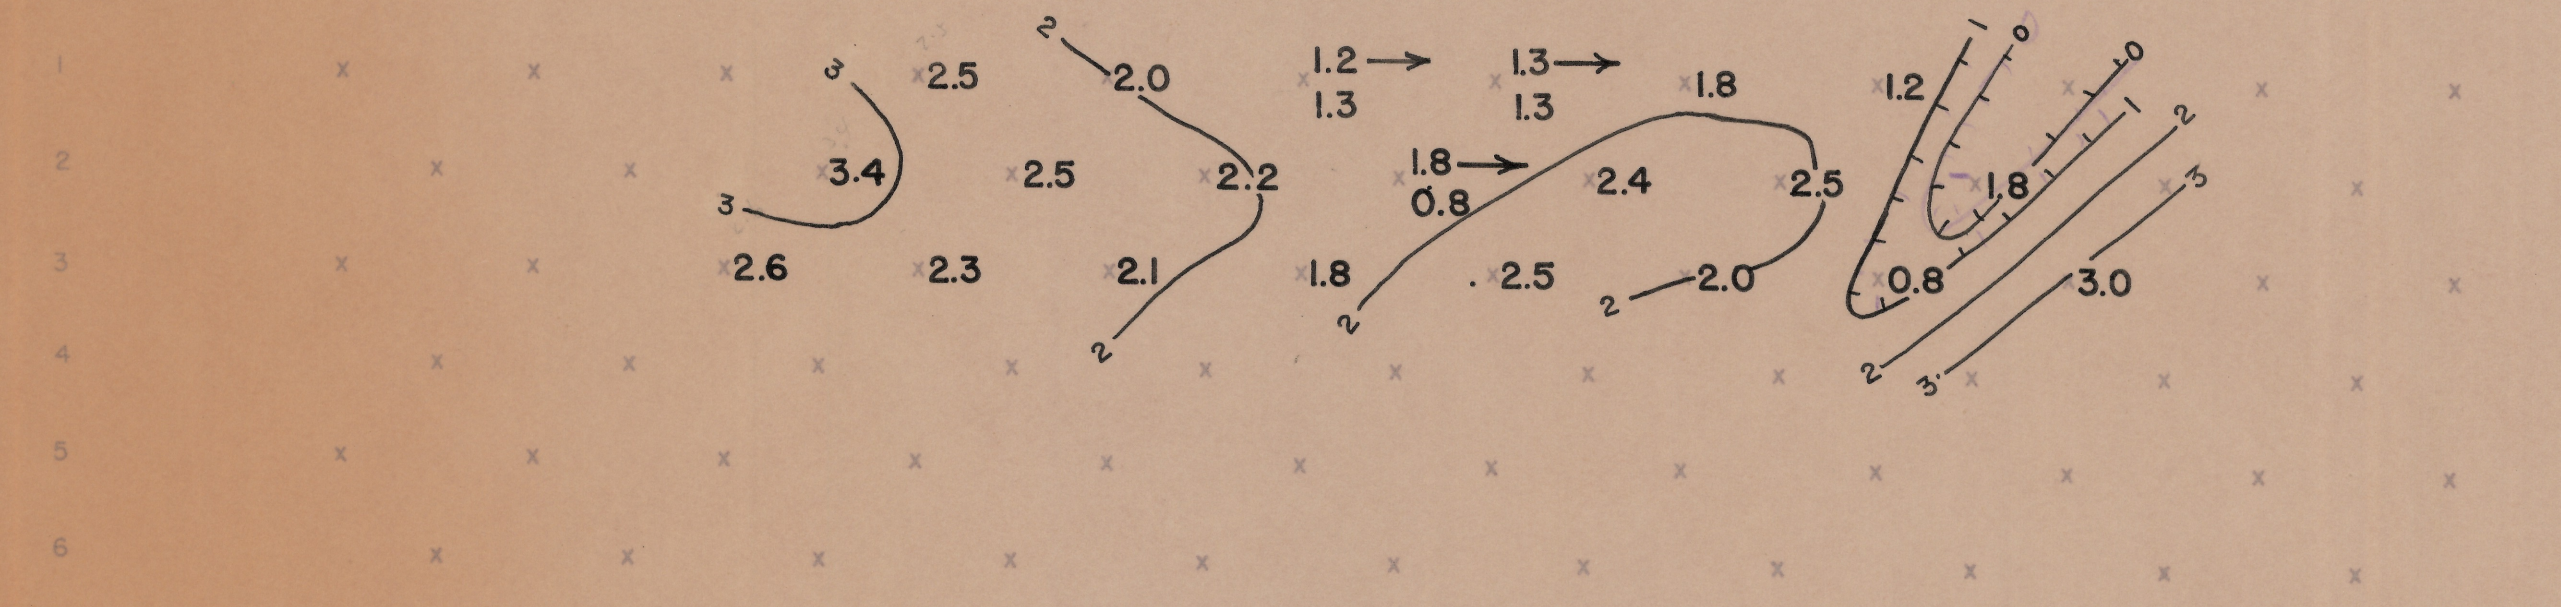

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 1.0 C.P.S.

HUALAPAI AREA


SECTIONAL DATA SHEET

LINE NO. 6

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 500' DATE: JULY 1966

FOR
THE HANNA MINING CO.

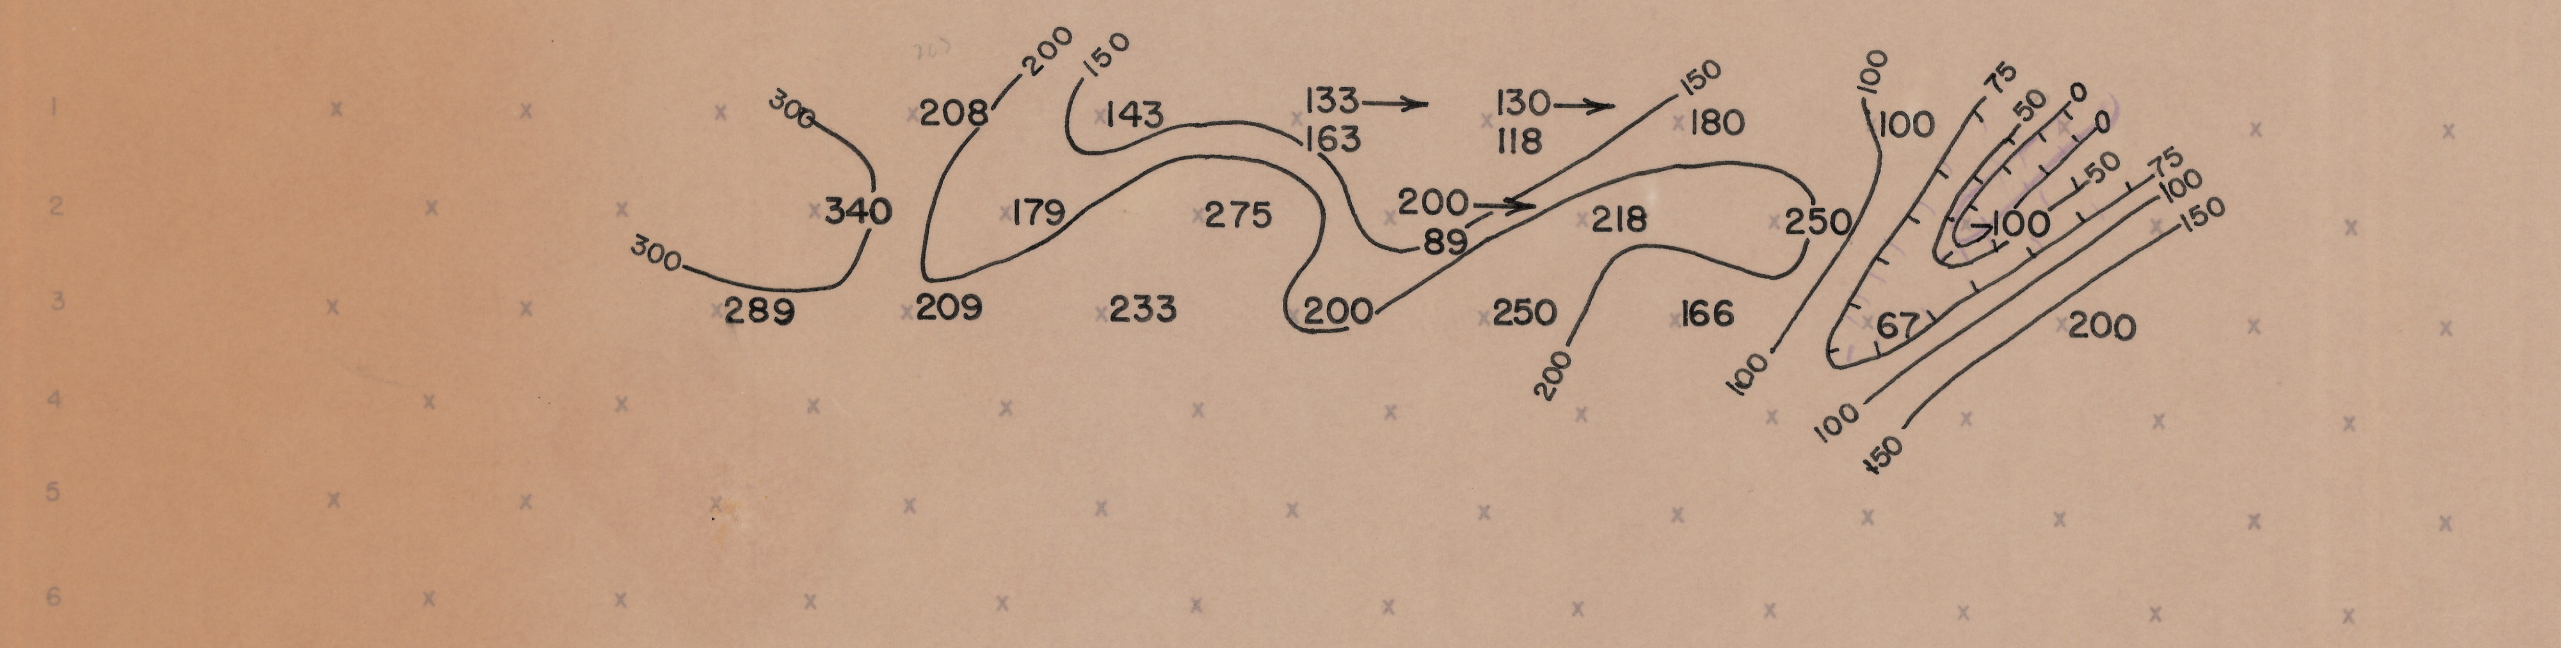

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
(MGF = $\frac{PFE \times 1000}{\rho_{DA}} \times 100$)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

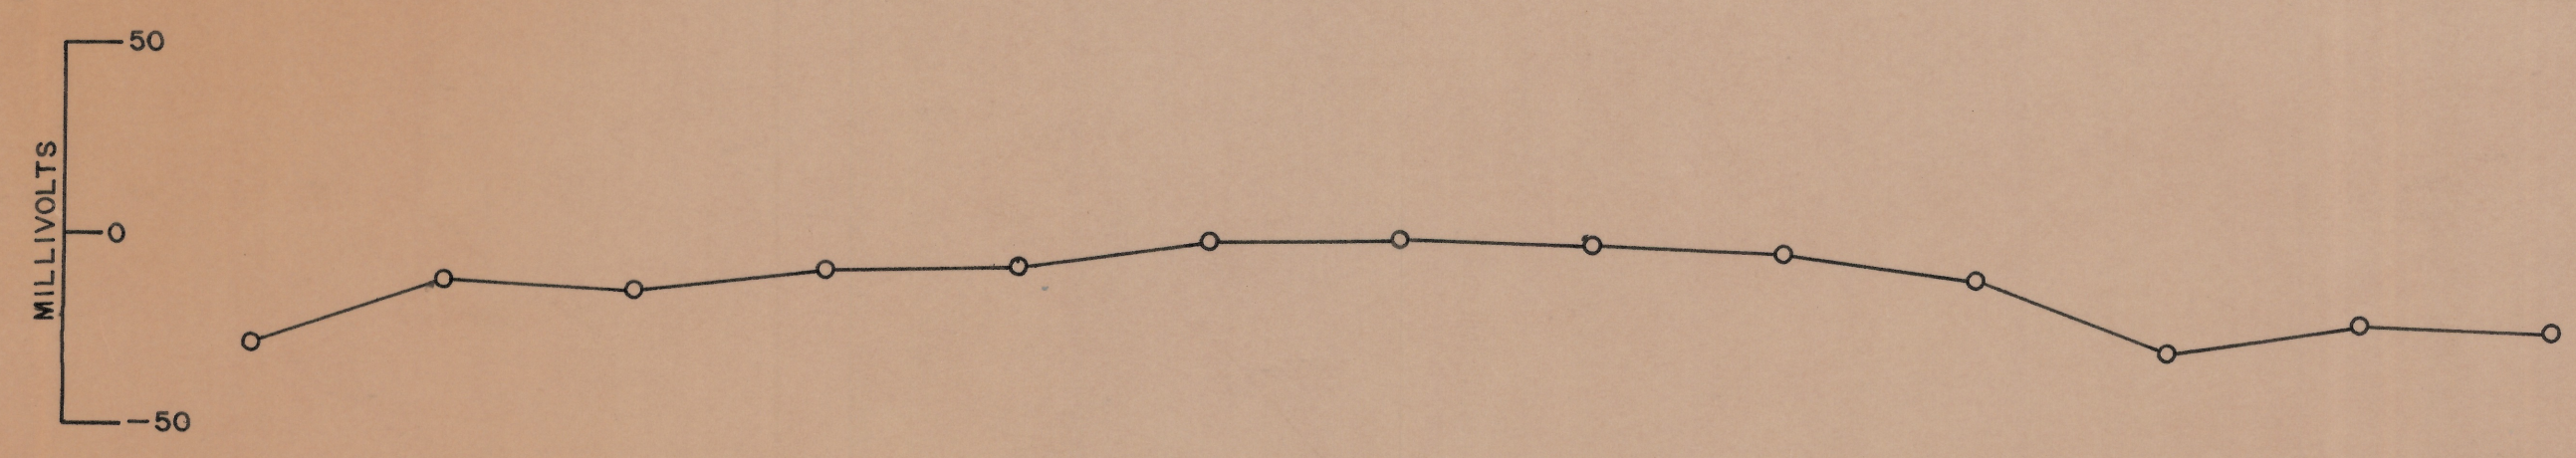

Handwritten notes at the bottom right of the page.