





EXPLANATION

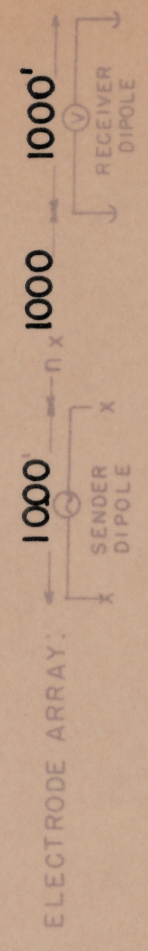

RELATIVE ANOMALY STRENGTH

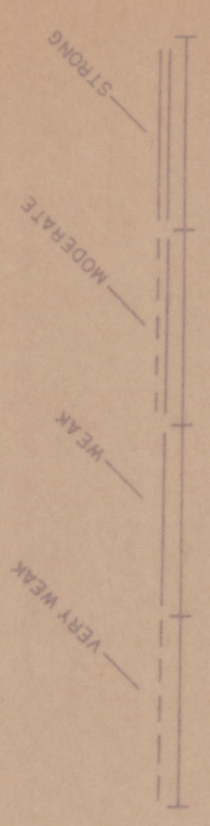

LOOKING NORTH

HUALAPAI AREA

SECTIONAL DATA SHEET
LINE NO. 7

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1,000' DATE: JULY 4, 1966





FOR
THE HANNA MINING CO.

APPARENT RESISTIVITY (in units of OHM FEET) (0.01)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 CPS.

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 CPS.

APPARENT METALLIC CONDUCTION FACTOR (MCF)
 $MCF = \frac{PFE \times 1000}{\rho_{DC}}$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

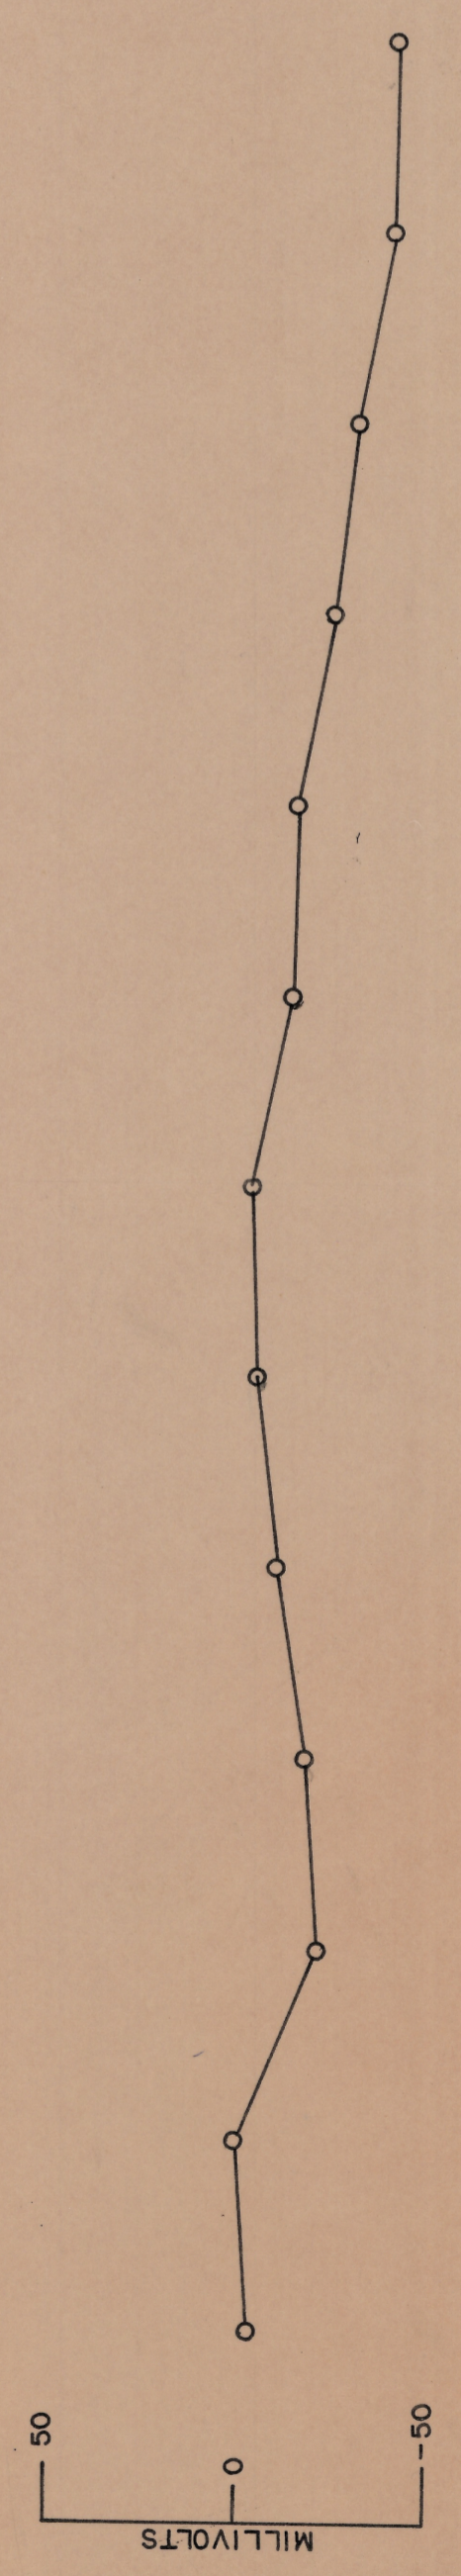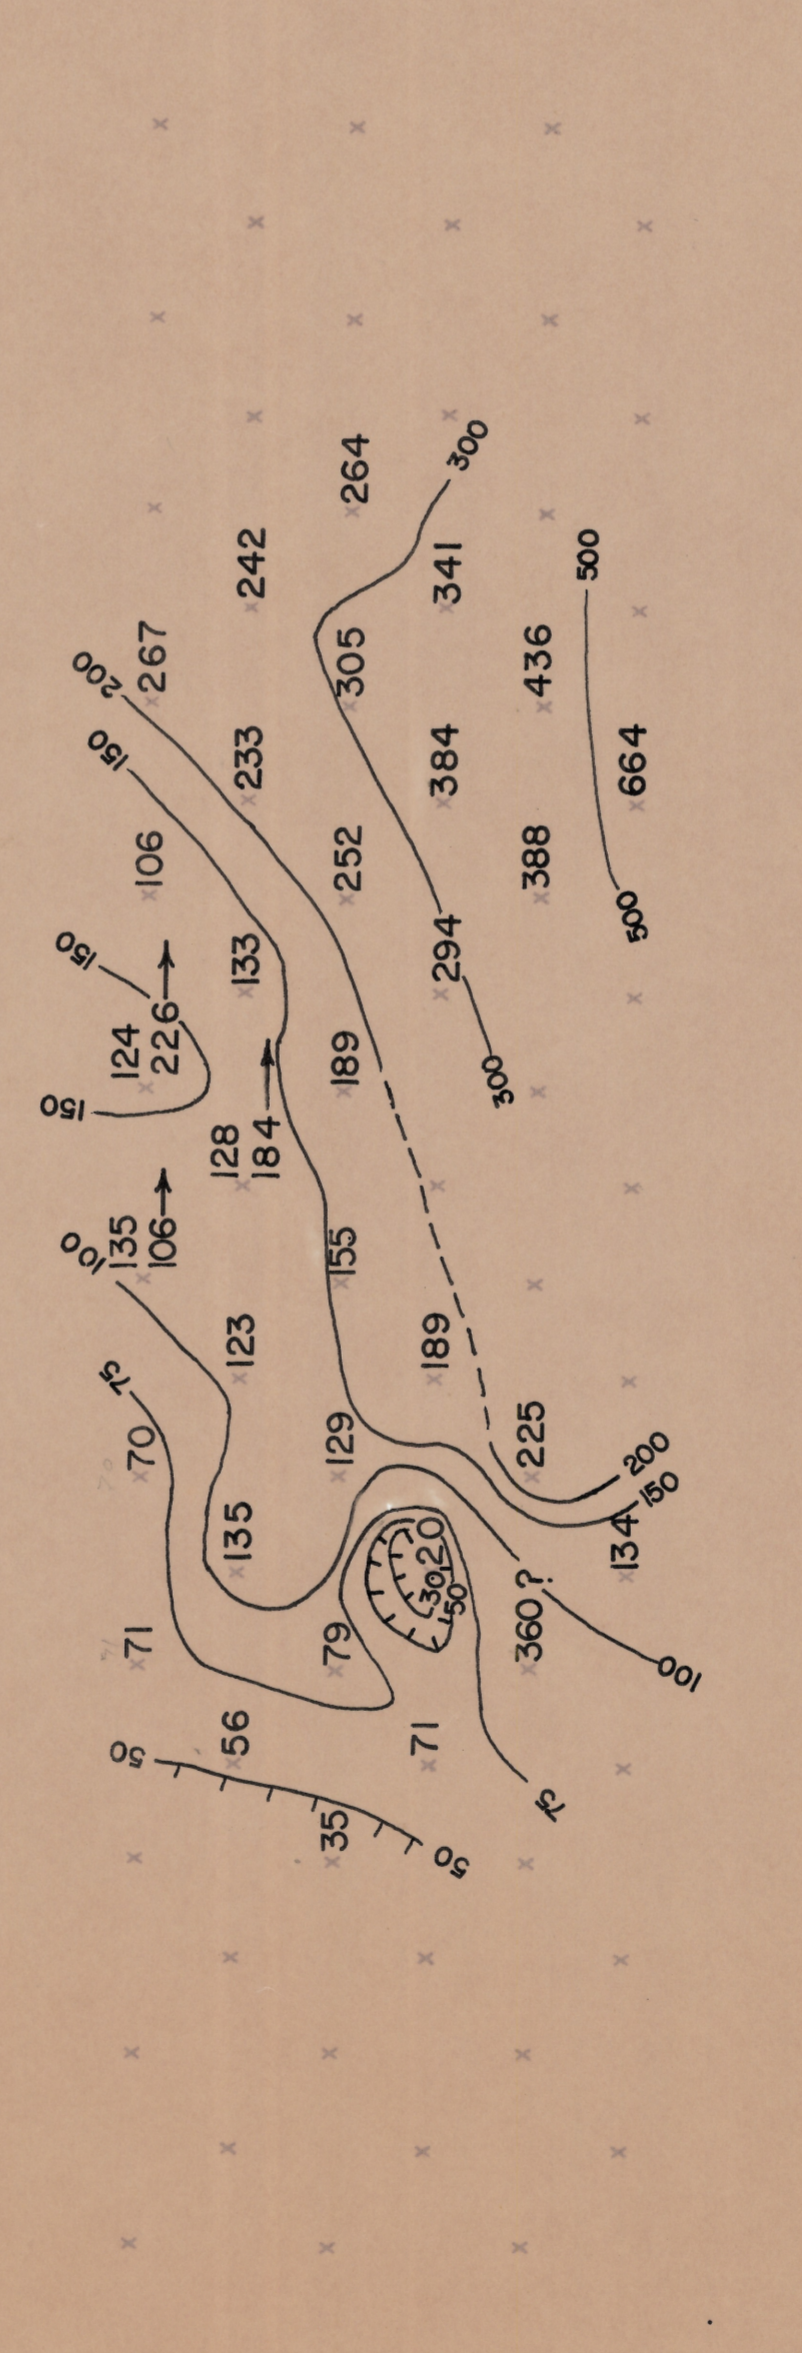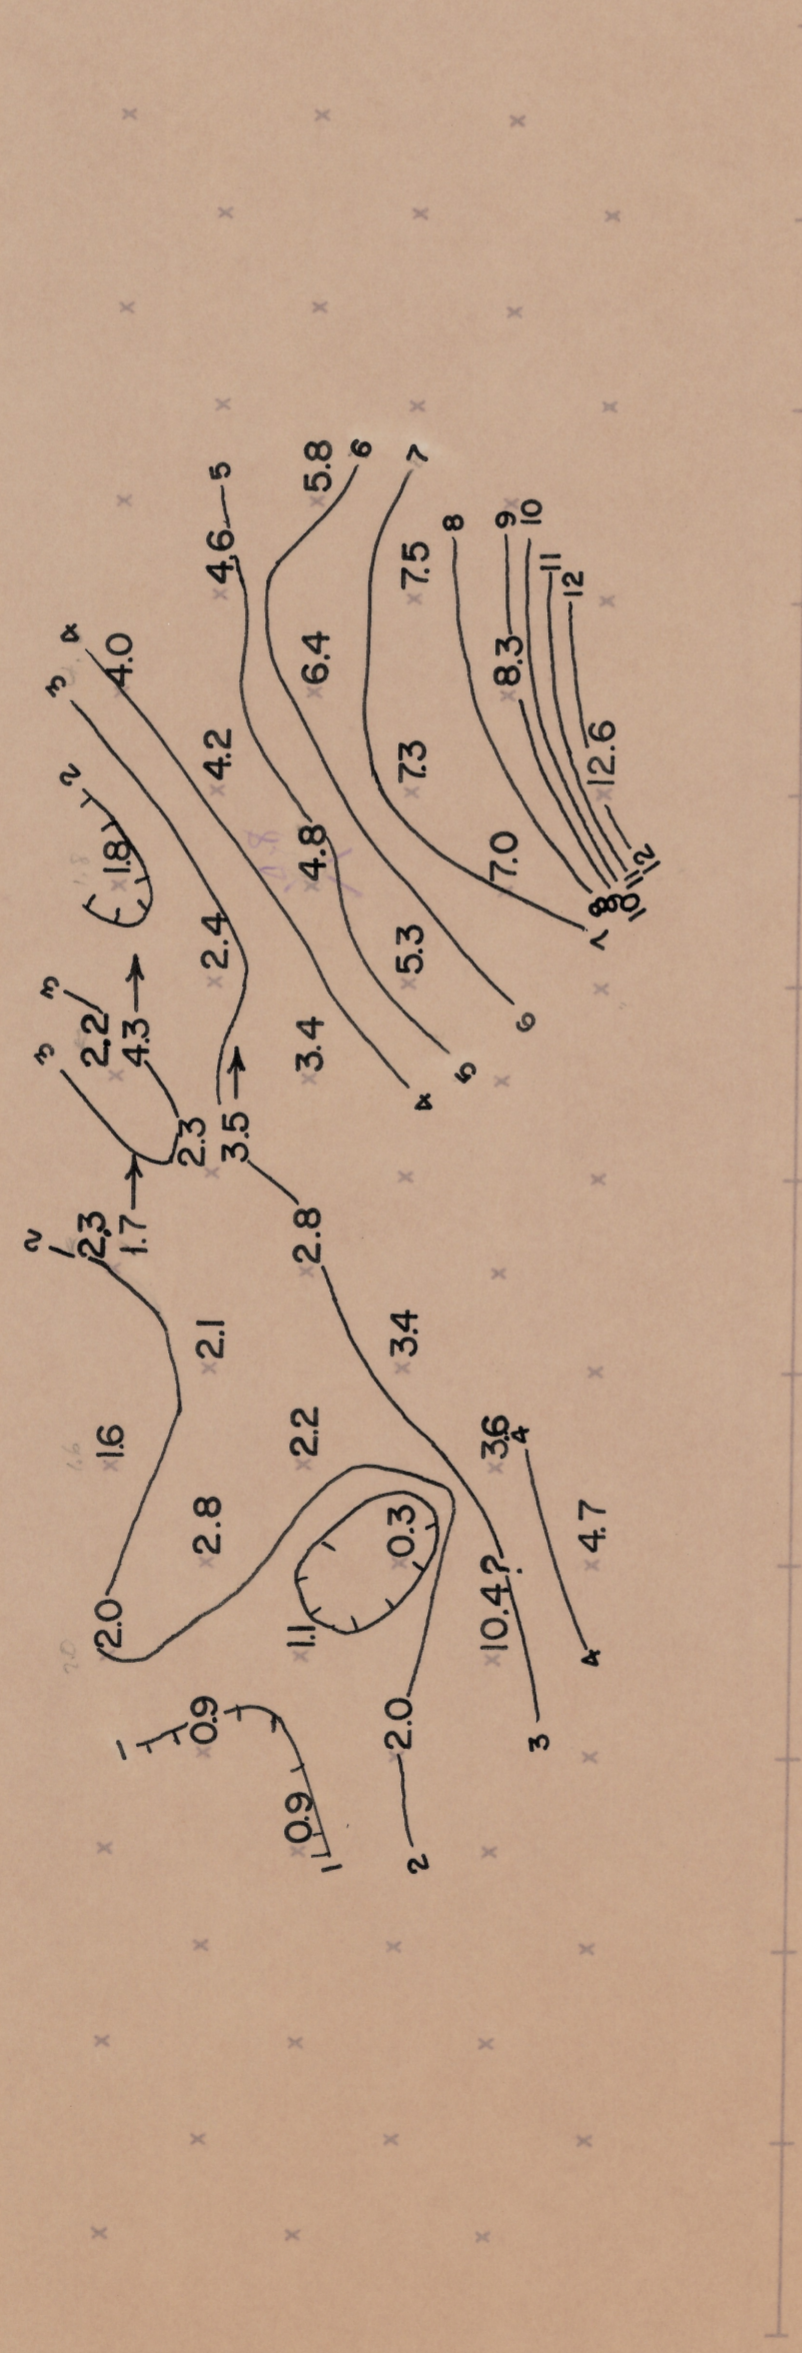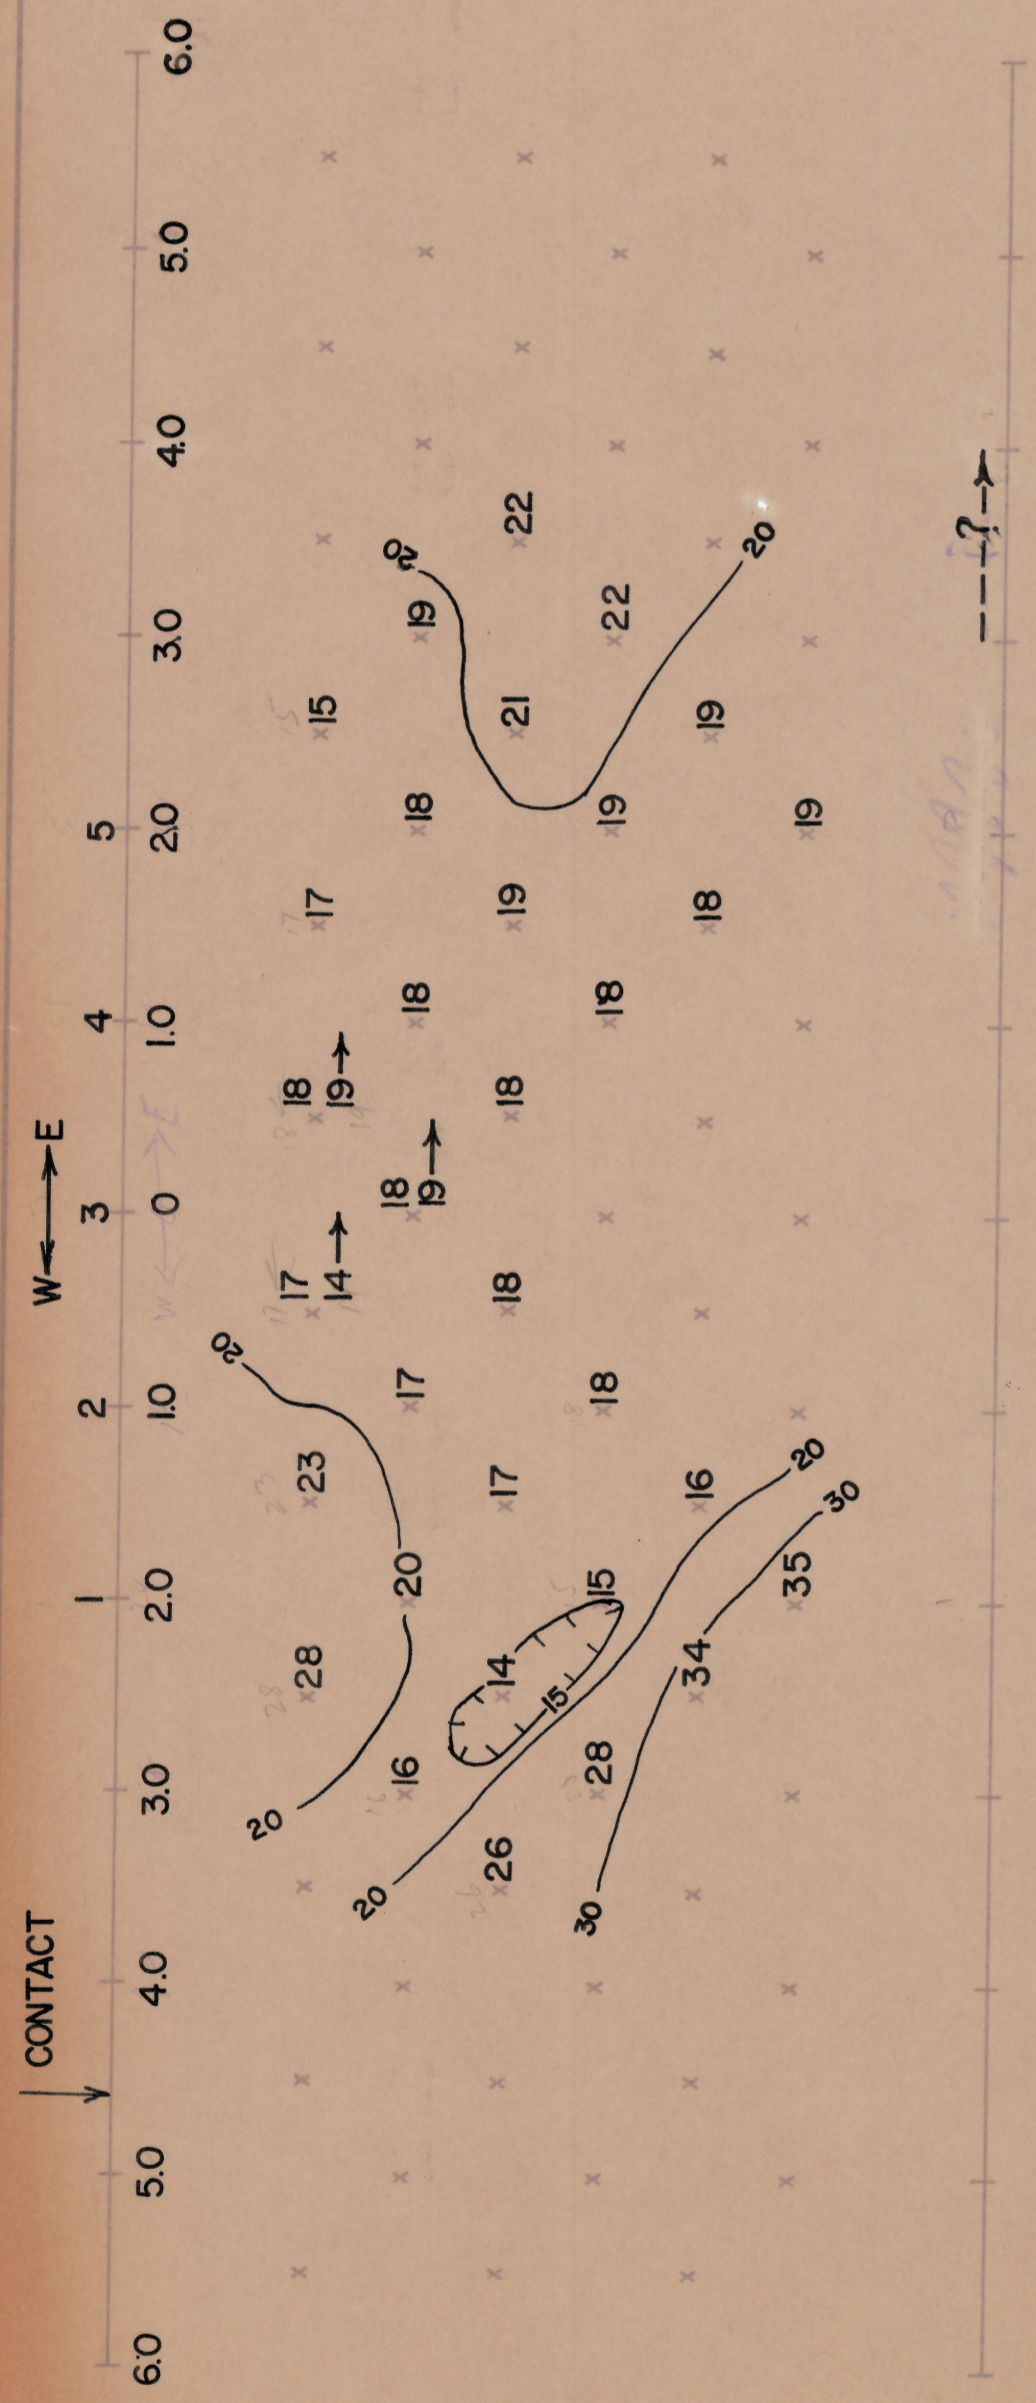

PHO 450-20-15 vly 30 hanna