



ELECTRODES STATIONS
 0 INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

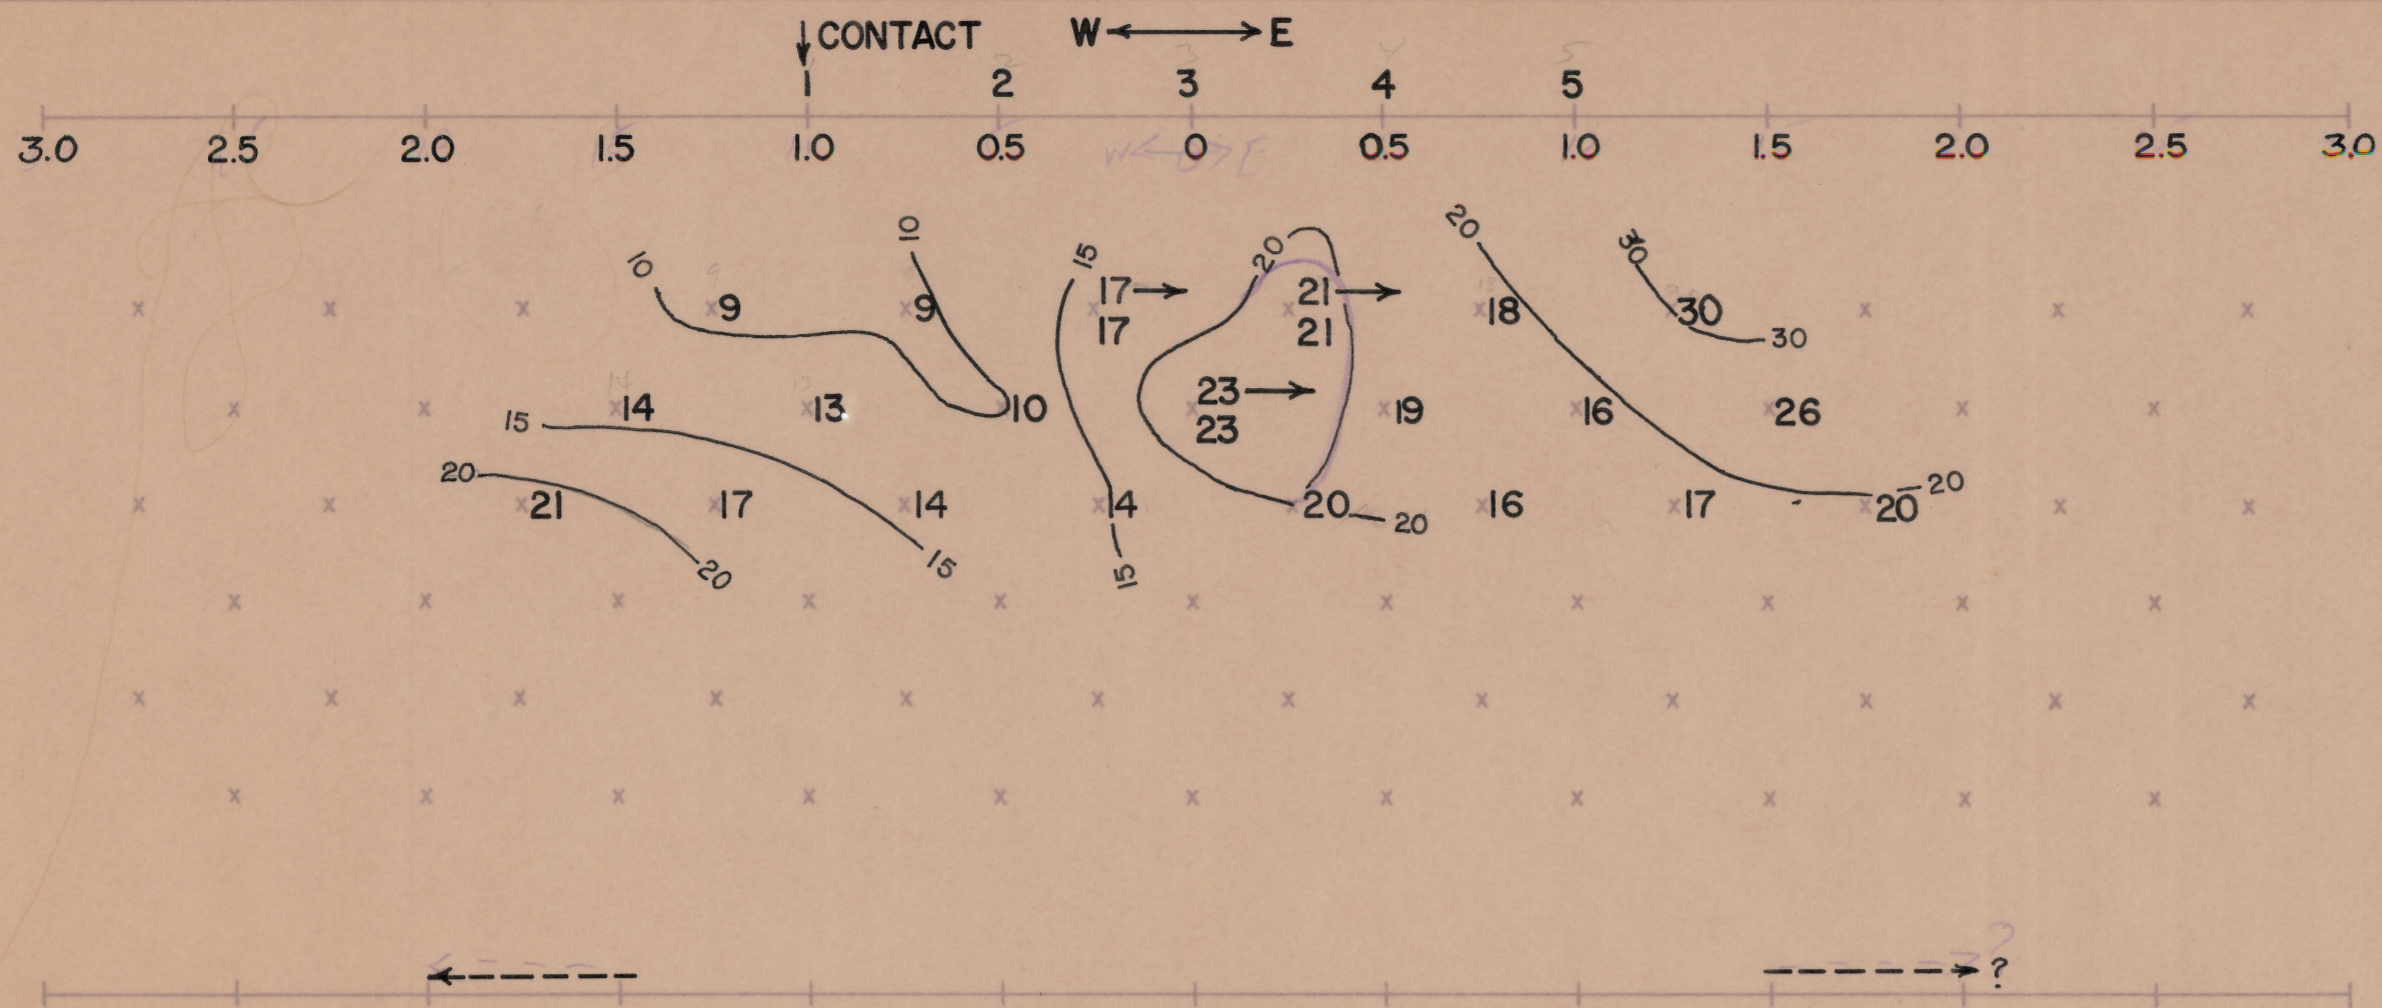


APPARENT RESISTIVITY (ρ_{DC})
 IN UNITS OF OHM FEET (FT)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 c.p.s.

EXPLANATION

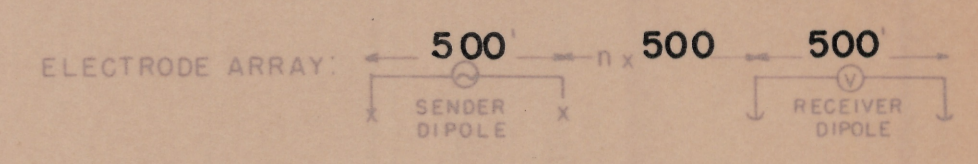


RELATIVE ANOMALY STRENGTH

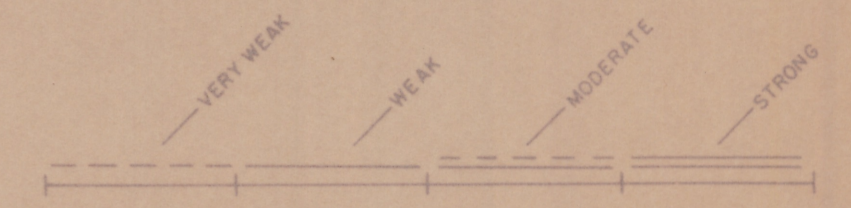

LOOKING NORTH

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 c.p.s.

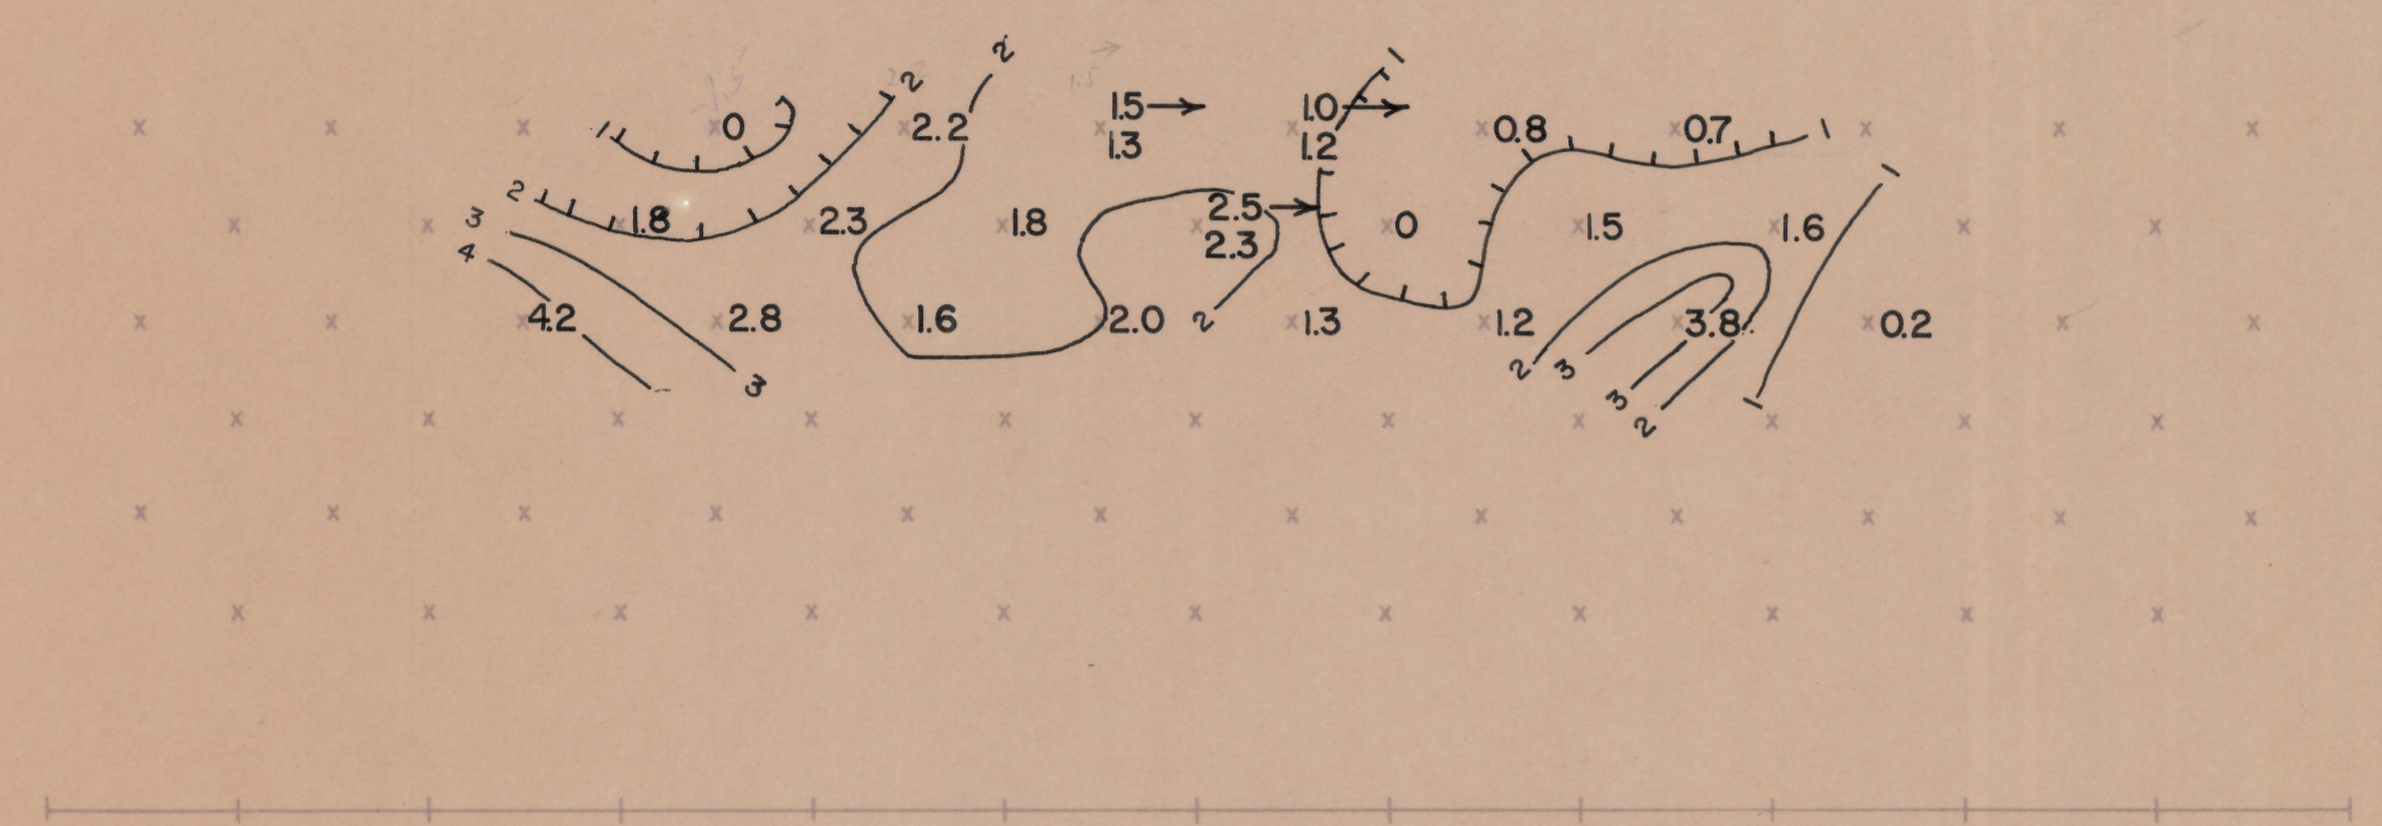

HUALAPAI AREA

SECTIONAL DATA SHEET


LINE NO. 11

INDUCED POLARIZATION TRAVERSE


HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: JULY, 1966

FOR
 THE HANNA MINING CO.

APPARENT "METALLIC CONDUCTION" FACTOR (MGF)
 $(MGF = \frac{PFE \times 1000}{\rho_{DC}})$
 CONTOUR INTERVAL LOGARITHMIC

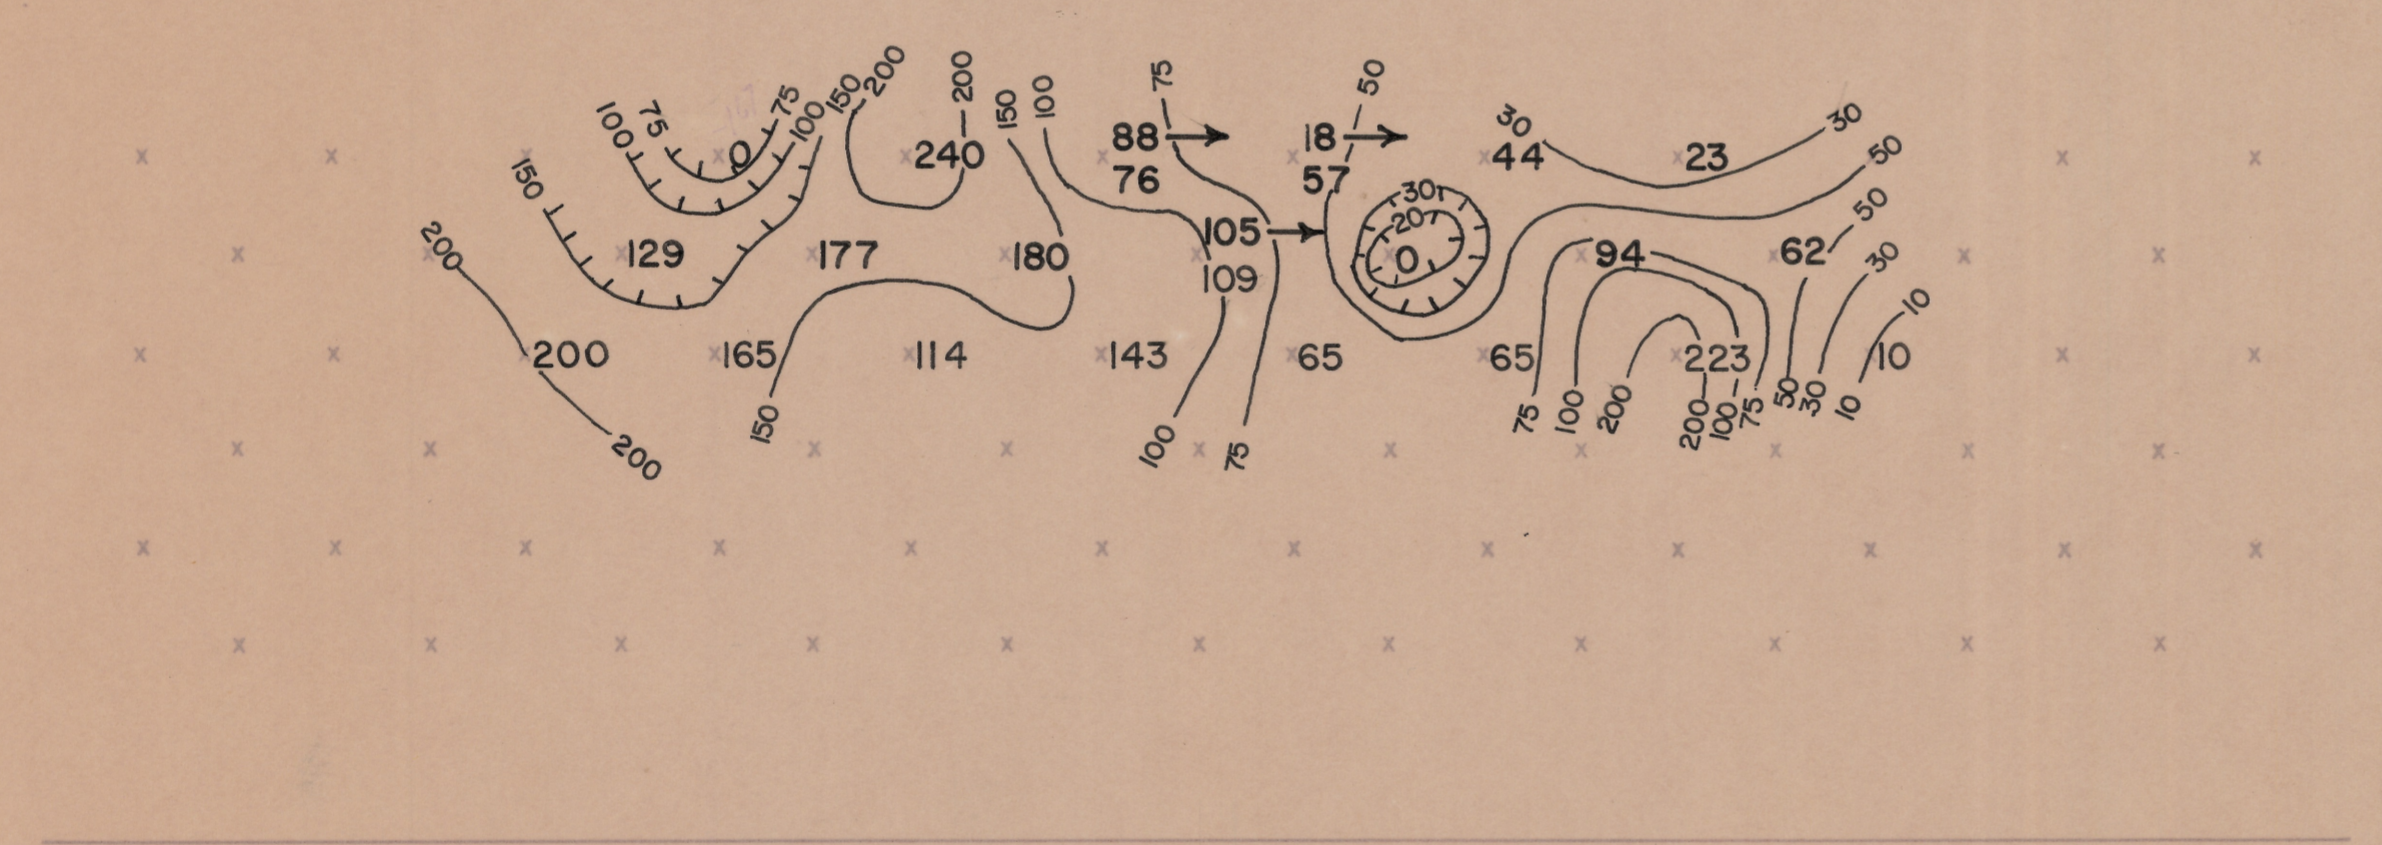

SELF POTENTIAL

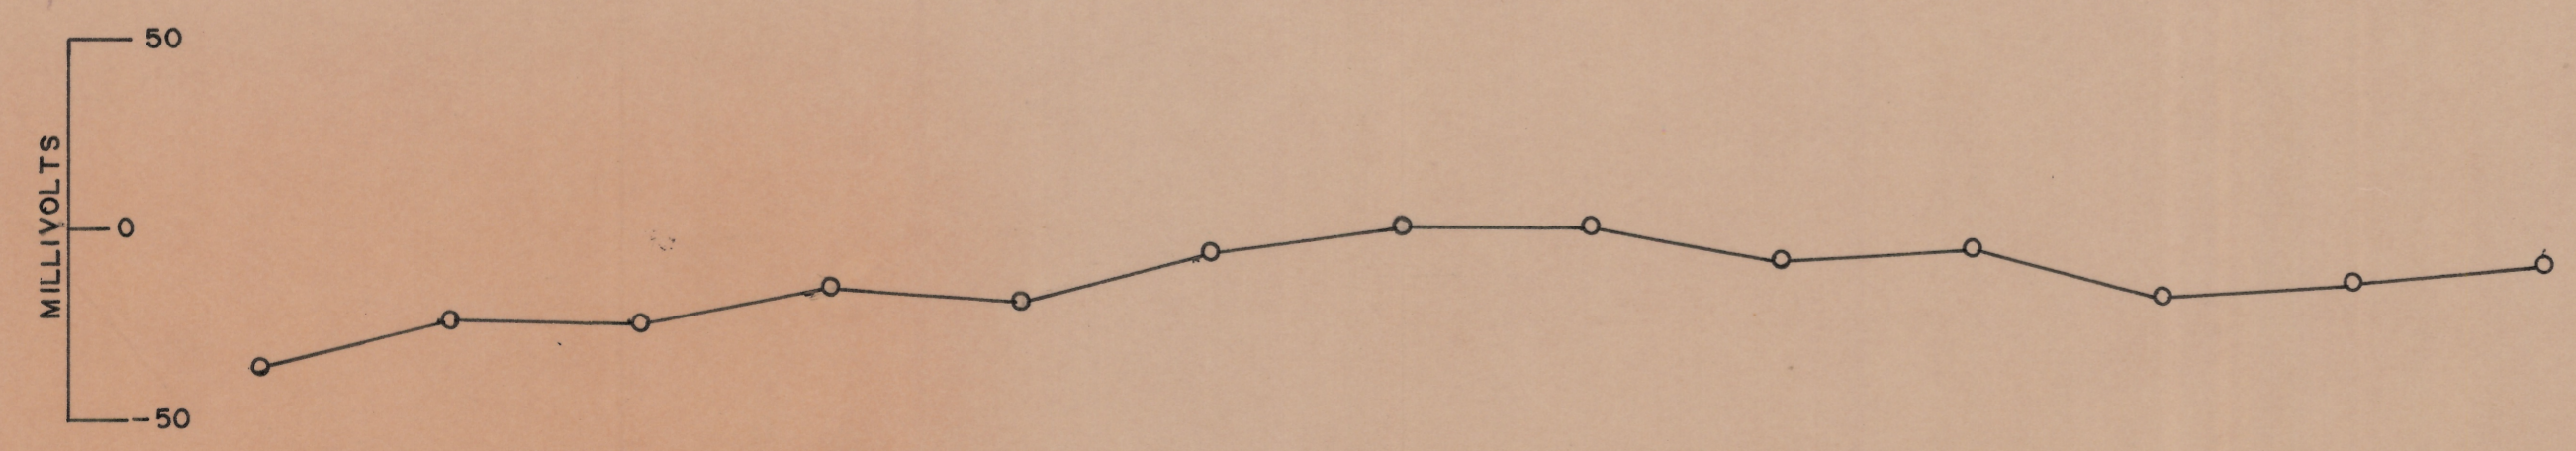

00140-100-20-105 W/M 88 11/14/66