

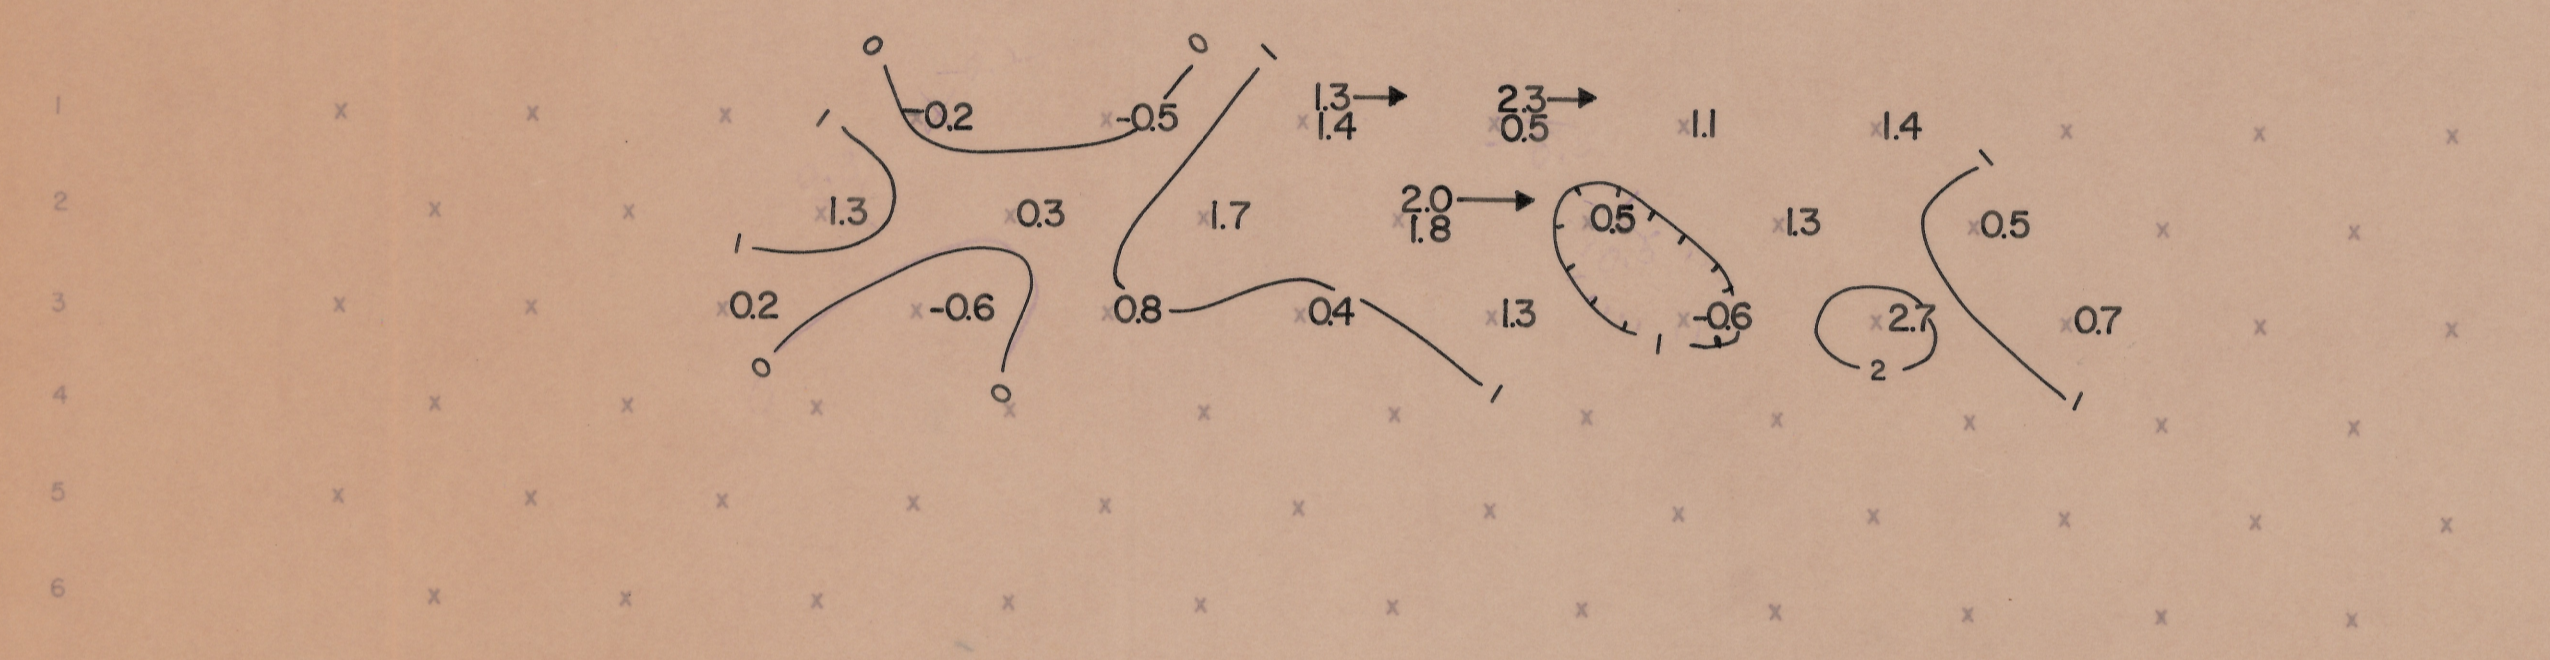
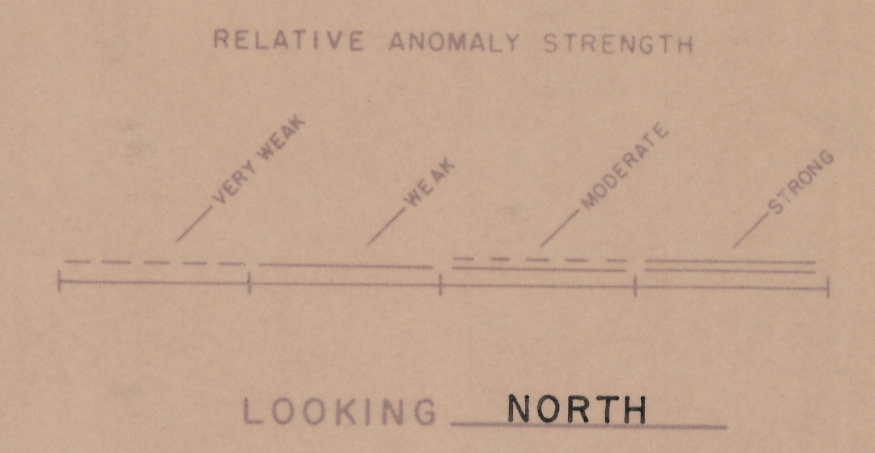


APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

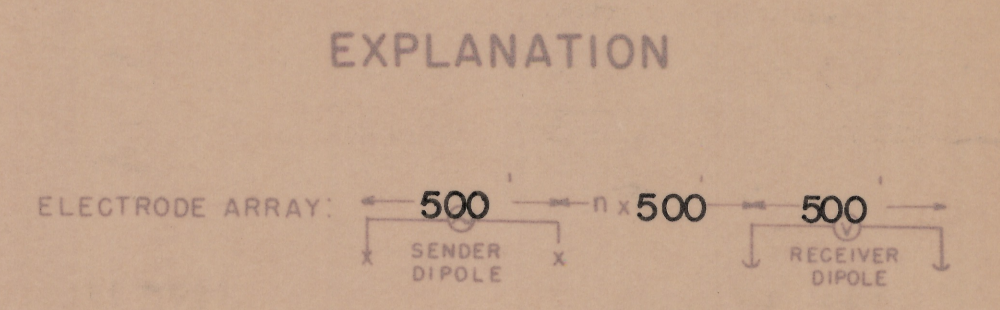

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 1.0 cps

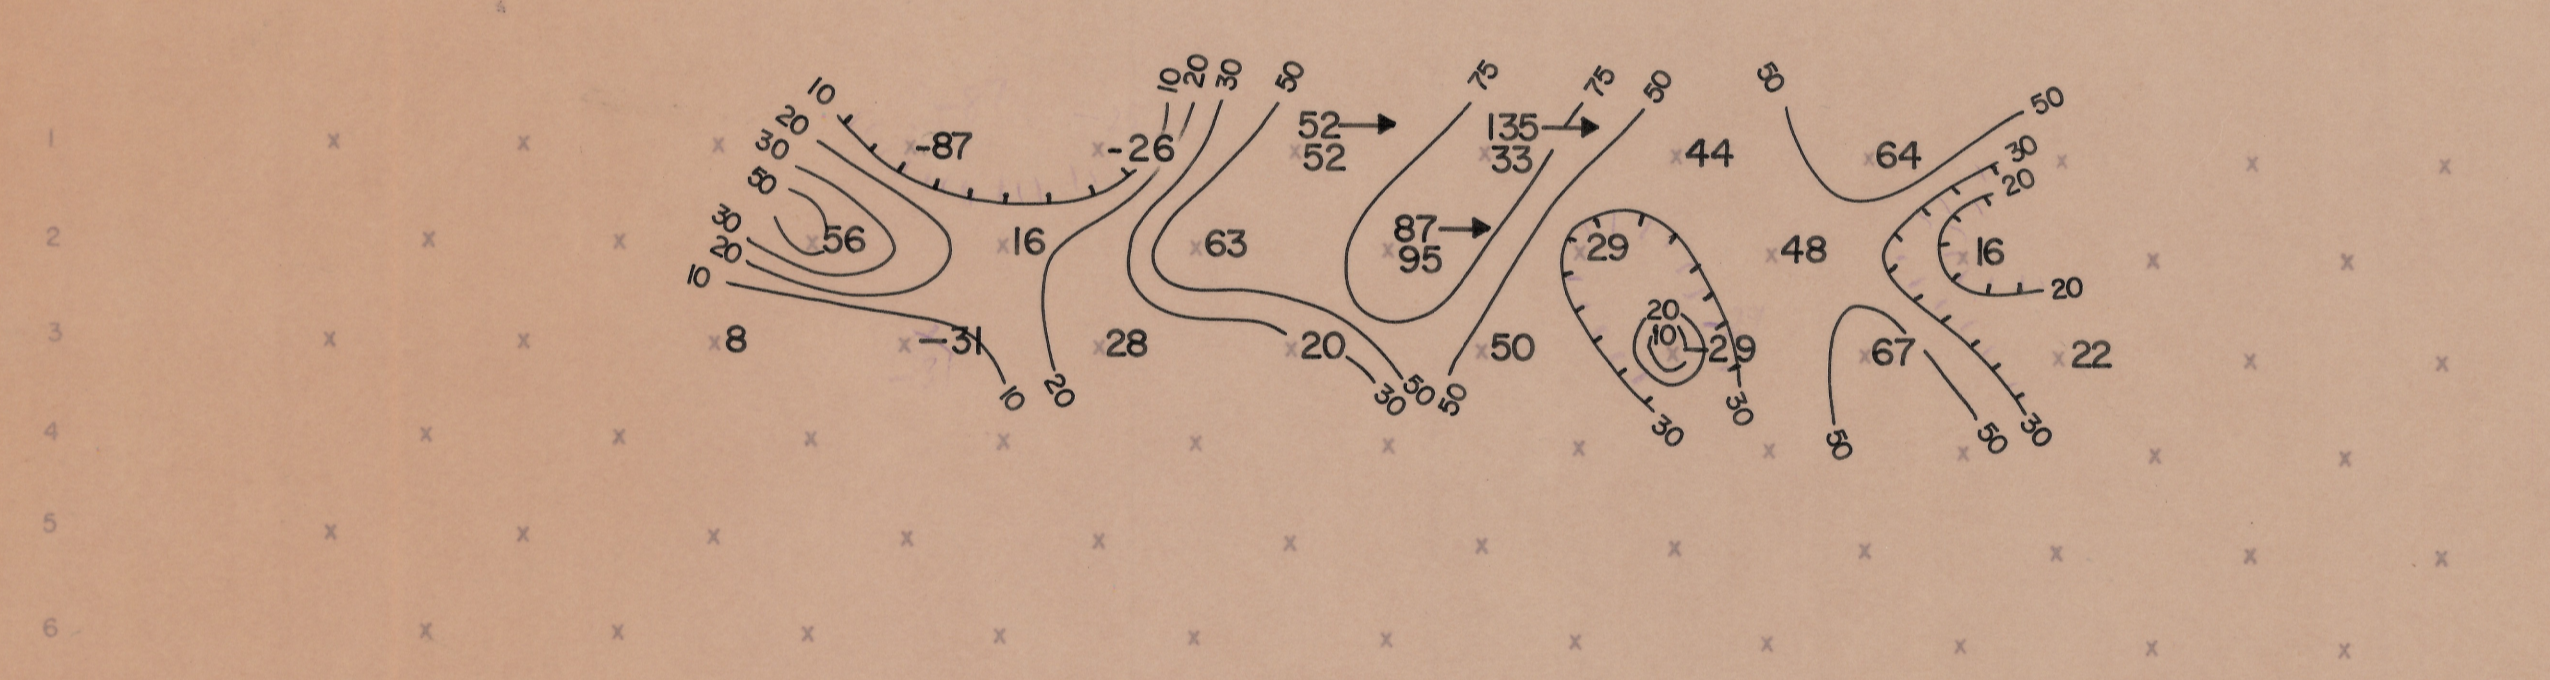


APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
 $(MCF = \frac{PFE \times 1000}{\rho_{DC}})$
 CONTOUR INTERVAL LOGARITHMIC

HUALAPAI AREA

SECTIONAL DATA SHEET
 LINE NO. 13
 INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 500' DATE: JULY 1966

FOR
 THE HANNA MINING CO.

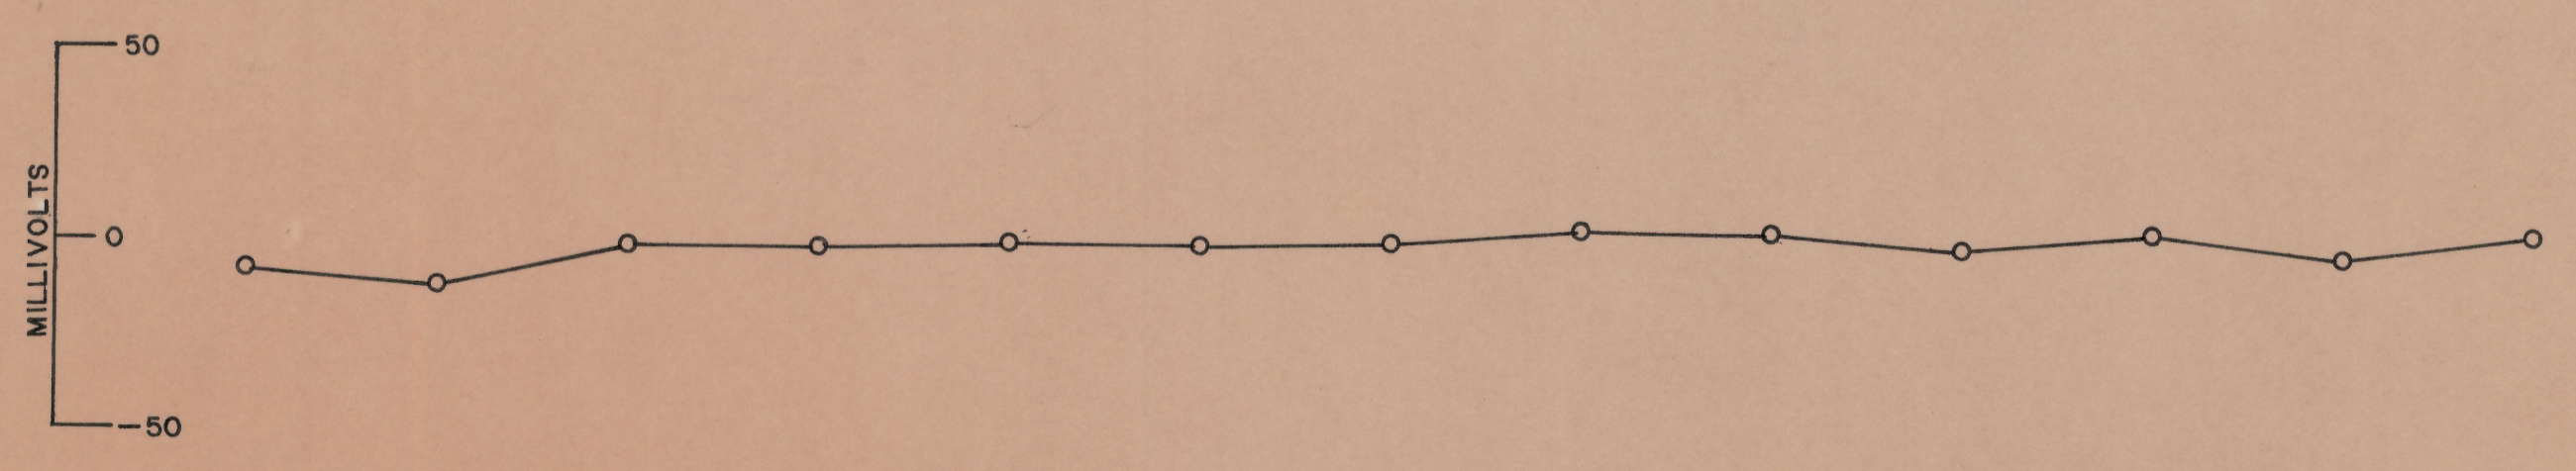

SELF POTENTIAL



4670-000-00-105 4/11/66