
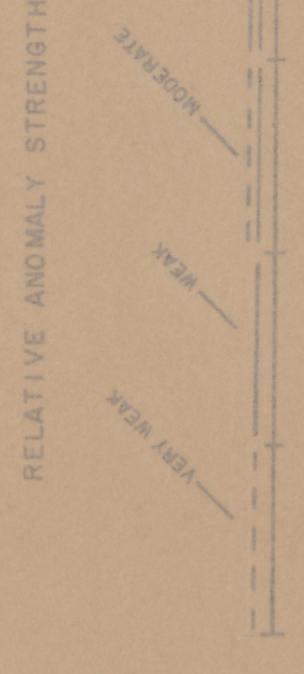


EXPLANATION

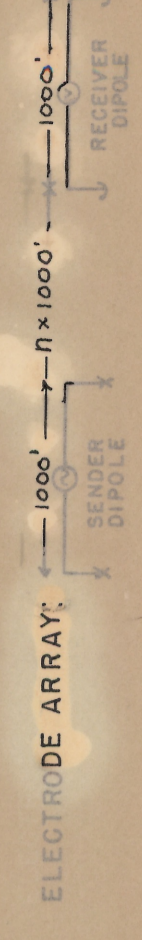

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

APPARENT METALLIC CONDUCTION FACTOR (MCF) CONTOUR INTERVAL LOGARITHMIC

$$MCF = \frac{PFE \times 1000}{\rho_{DC}}$$

SECTIONAL DATA SHEET
 LINE No. 2 ~ SPREAD 1
 INDUCED POLARIZATION TRAVERSE
 HALLORAN PROSPECT
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000 DATE: DECEMBER 1963
 FOR
 NOBLE & RUCKMICK
 PASADENA, CALIFORNIA

SELF POTENTIAL: Erratic; ± 20 MILLIVOLTS NOT PLOTTED.
 SURFACE PROFILE
 GEOLOGY, ETC.