



ELECTRODES STATIONS
 1 2 3 4 5 6
 6S 5S 4S 3S 2S 1S 0 N/S 1N 2N 3N 4N 5N 6N

Looking West

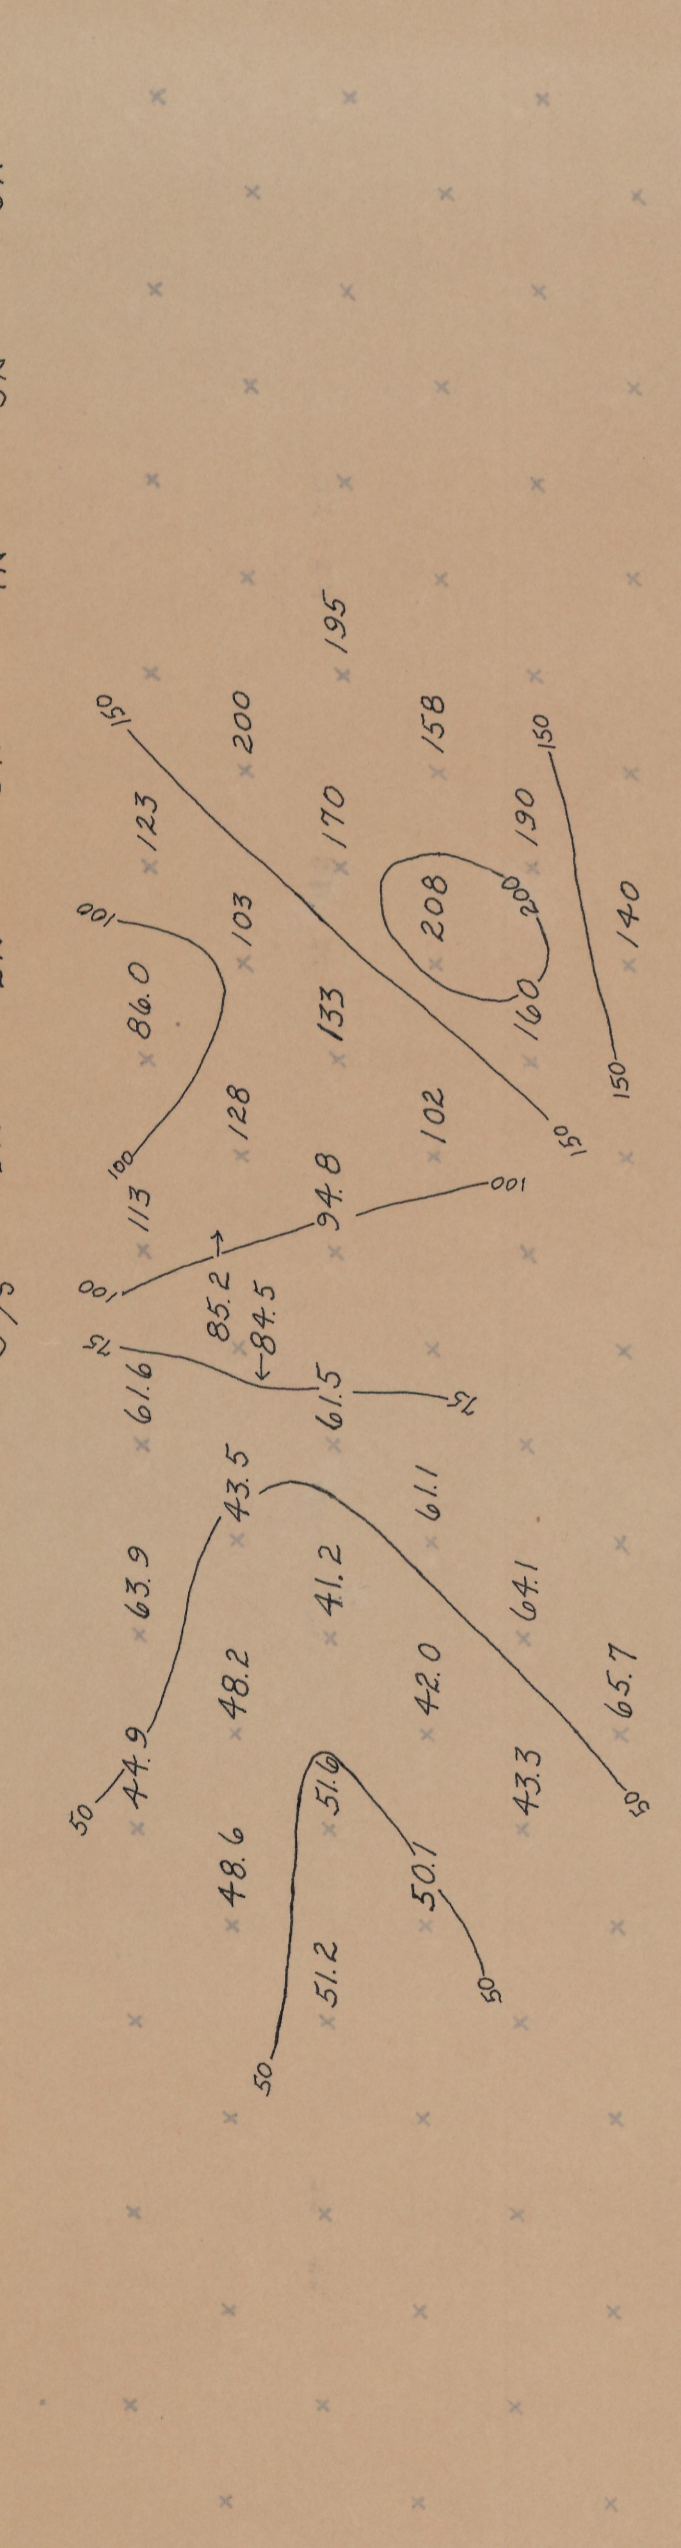


APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC 2:1
 SENDER FREQUENCY: 0.05 cps

EXPLANATION

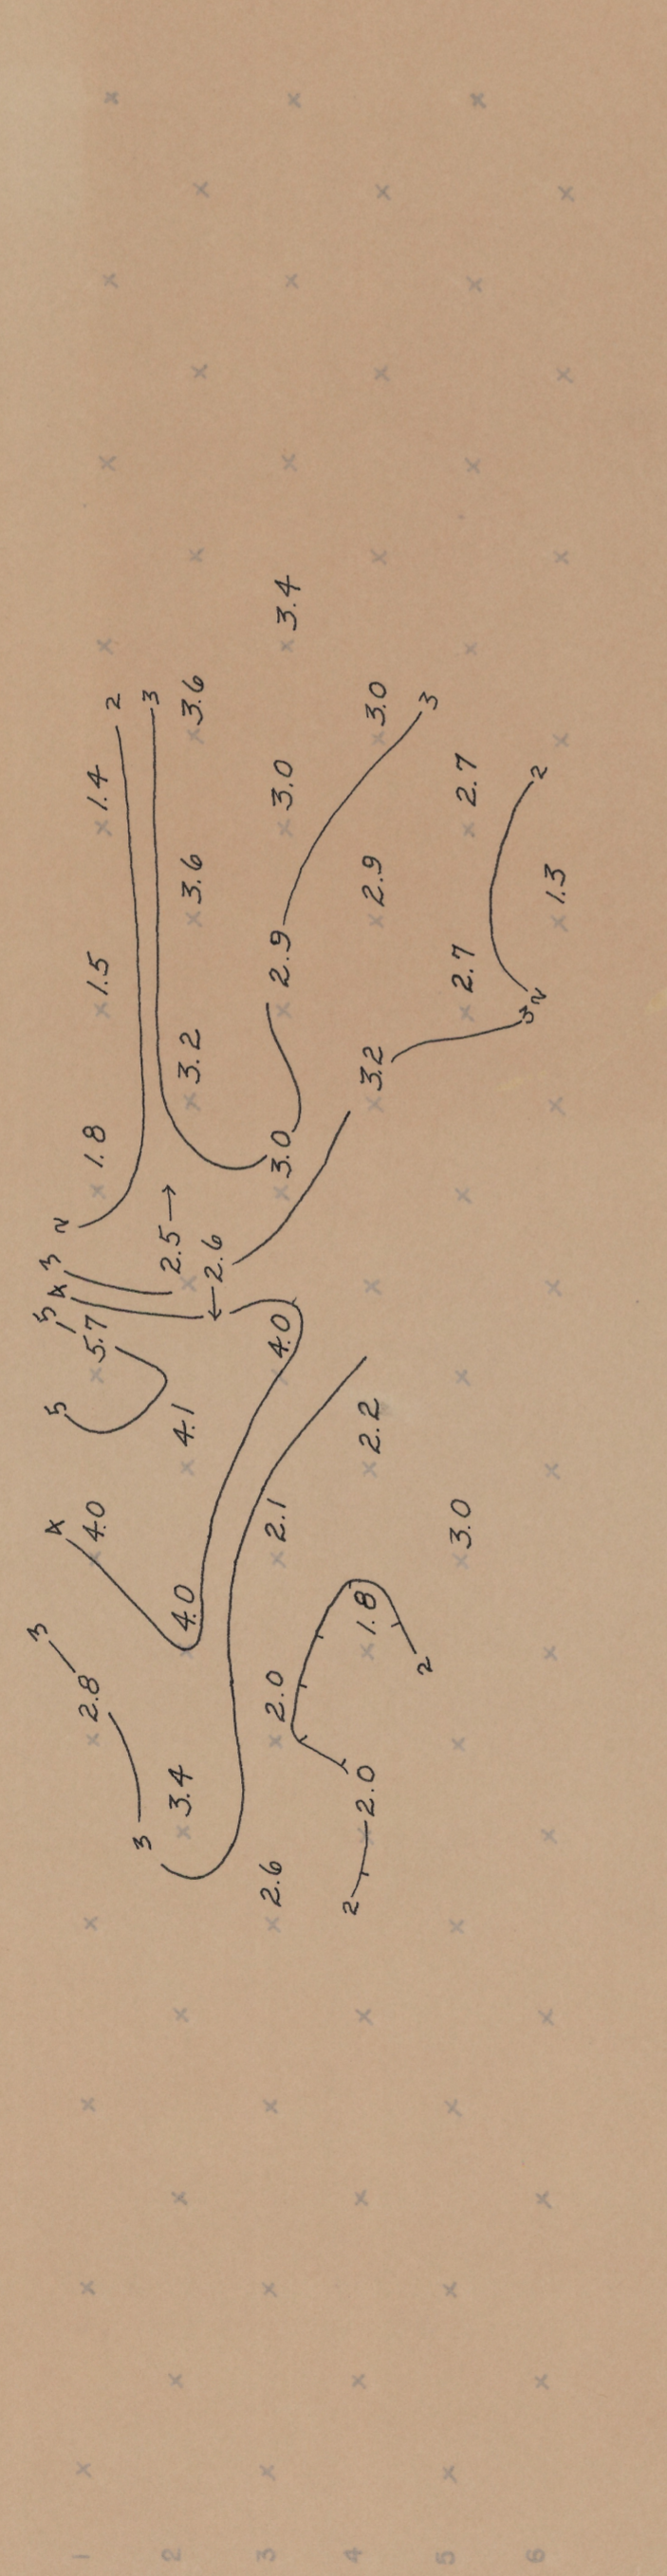

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

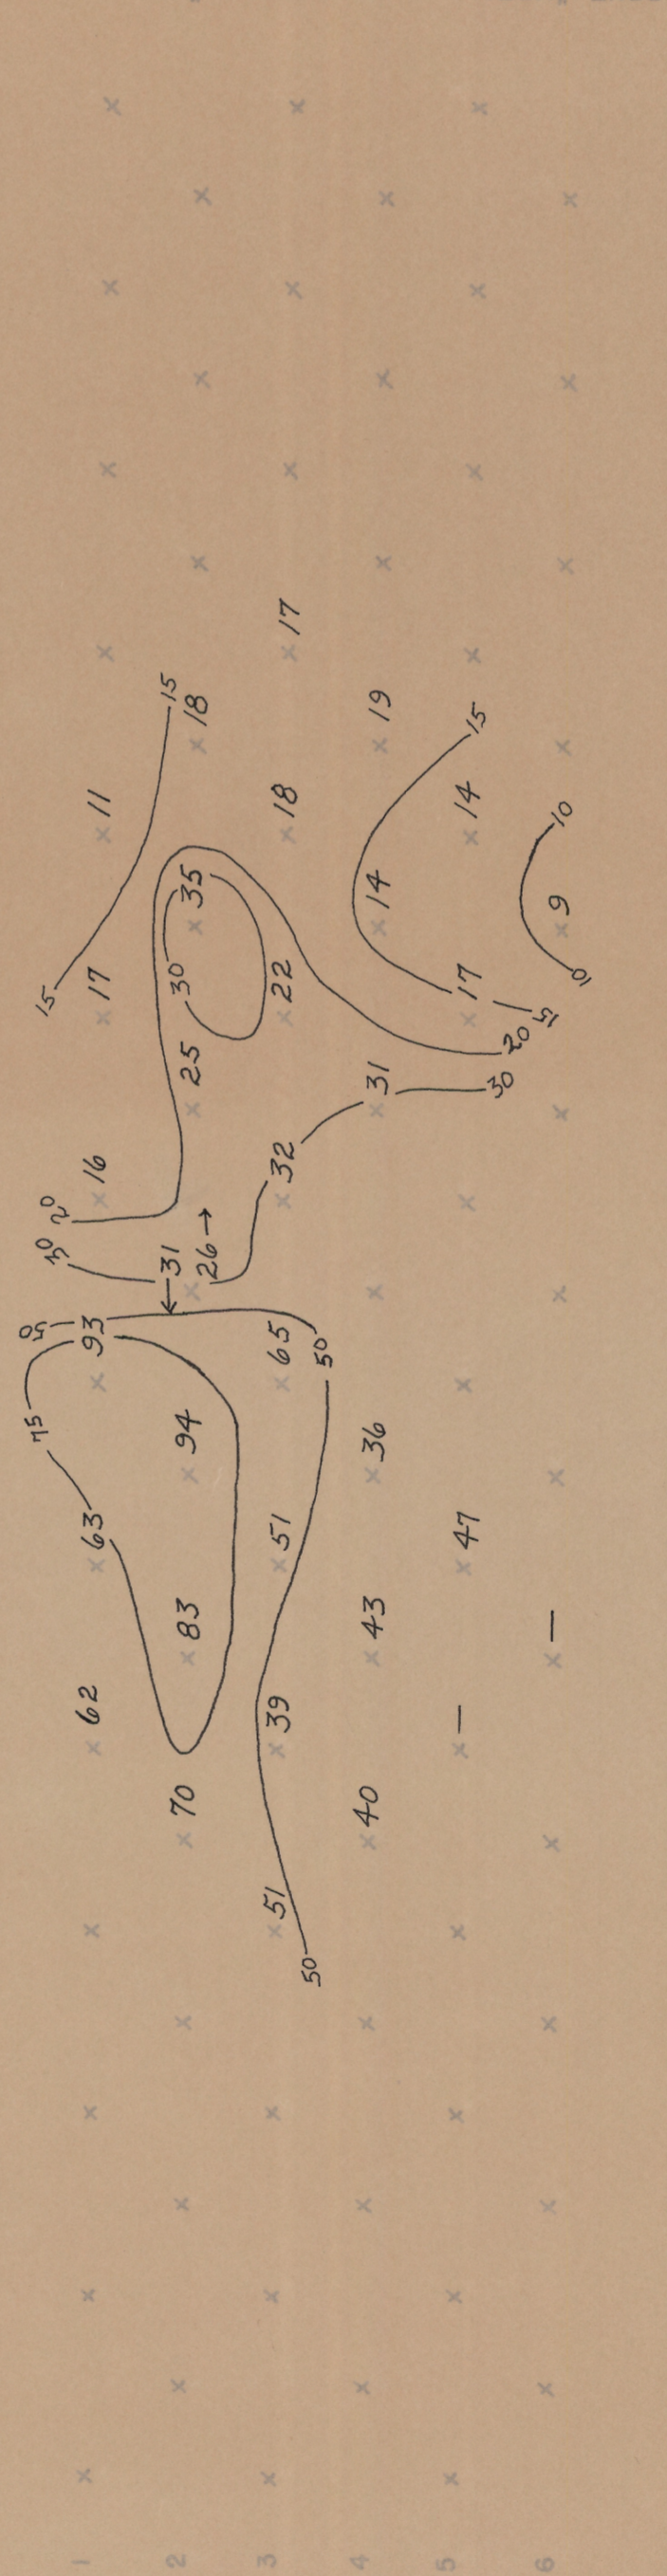

APPARENT METALLIC CONDUCTION FACTOR (MCF) (MCF = $\frac{PFE}{\rho_{DC}} \times 1000$)
 CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET
 LINE No. 3 ~ SPREAD 1
 INDUCED POLARIZATION TRAVERSE
 HALLORAN PROSPECT
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: DECEMBER 1963

FOR
 NOBLE & RUCKMICK
 PASADENA, CALIFORNIA

SELF POTENTIAL: ERRATIC; ± 20 MILLIVOLTS NOT PLOTTED
 SURFACE PROFILE
 GEOLOGY, ETC.