


Looking West


ELECTRODES STATIONS 3.55 3.05 2.55 2.05 1.55 1.05 0.55 0 N/S 0.5N 1.0N 1.5N 2.0N 2.5N

π INTERVAL BETWEEN SENDER & RECEIVER DIPOLES


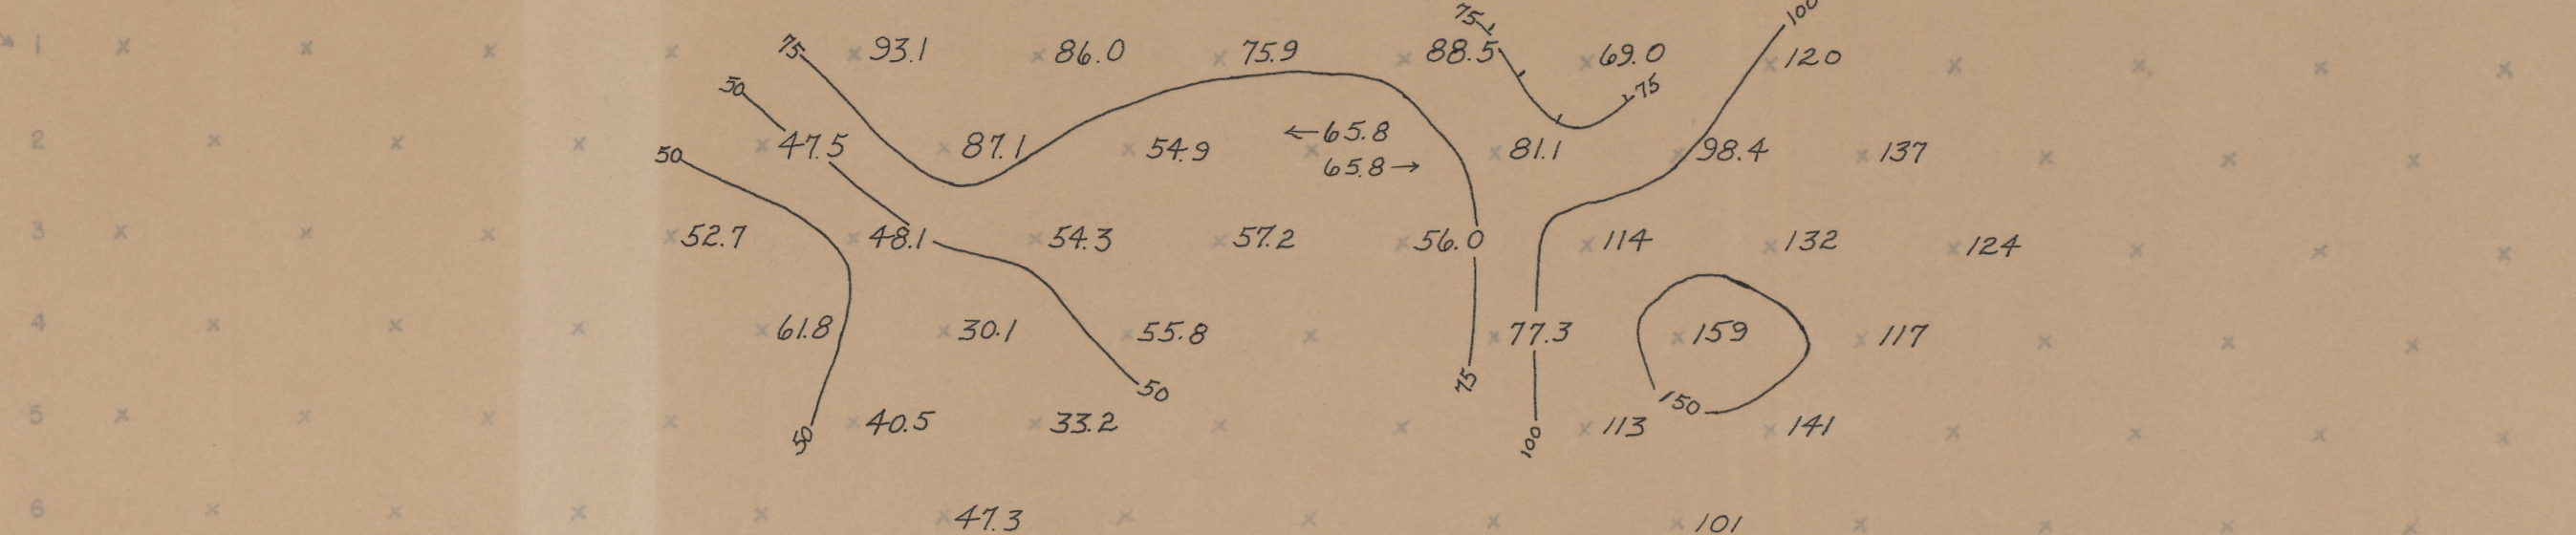


APPARENT RESISTIVITY (ρ<sub>OC</sub>) IN UNITS OF OHM FEET 2πI  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps

EXPLANATION

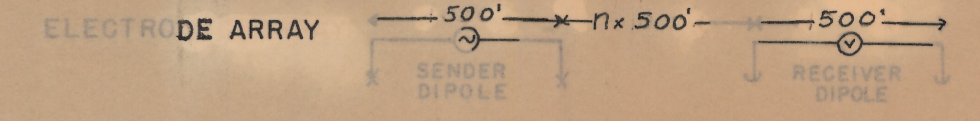


RELATIVE ANOMALY STRENGTH

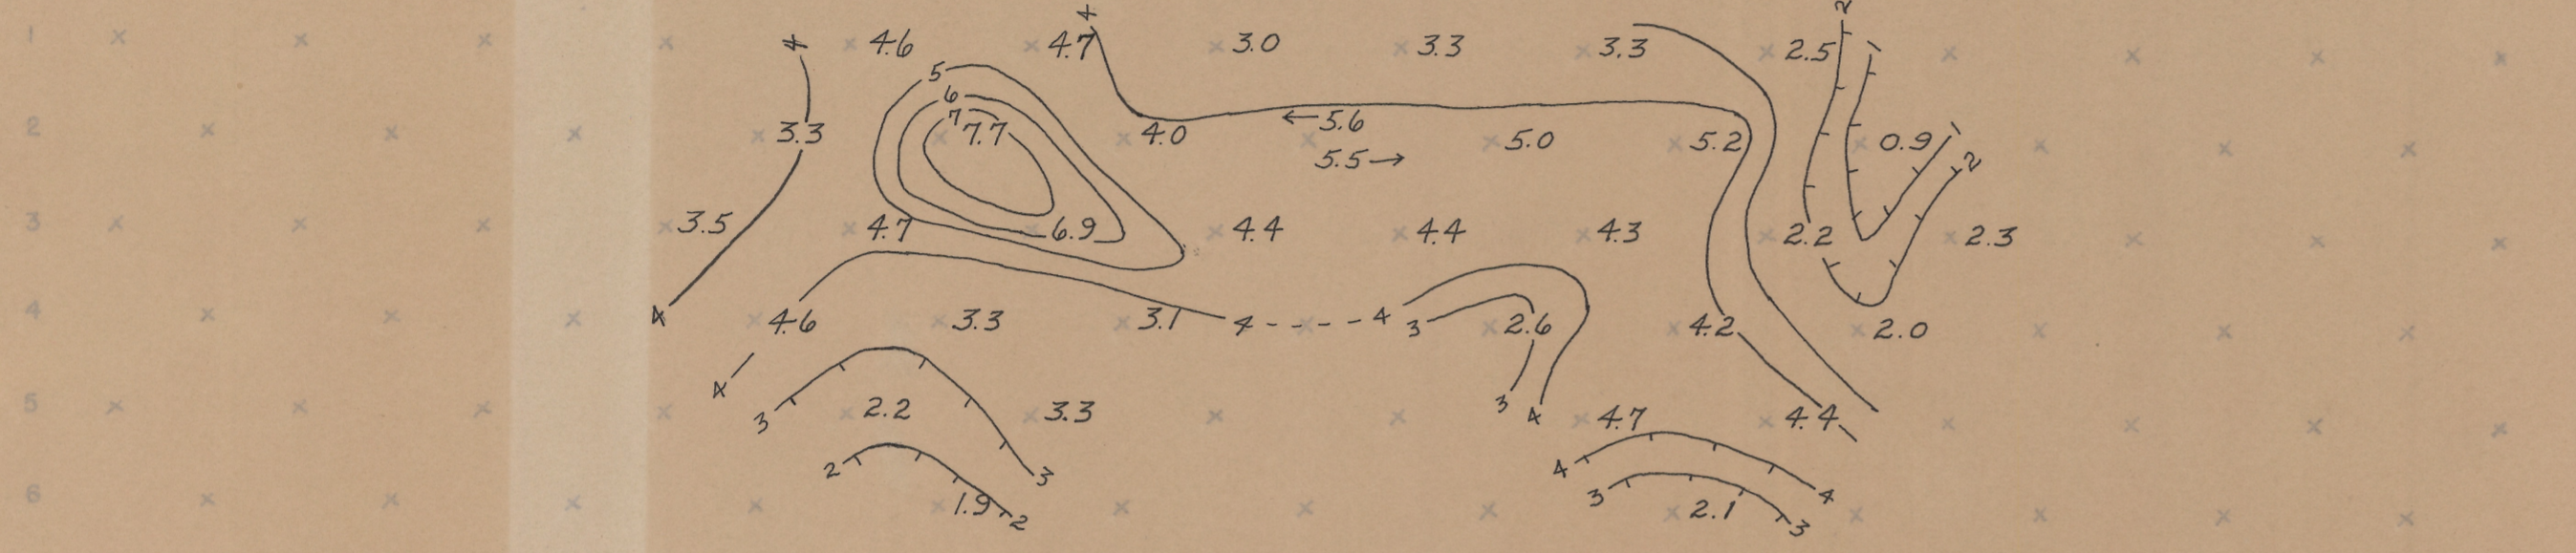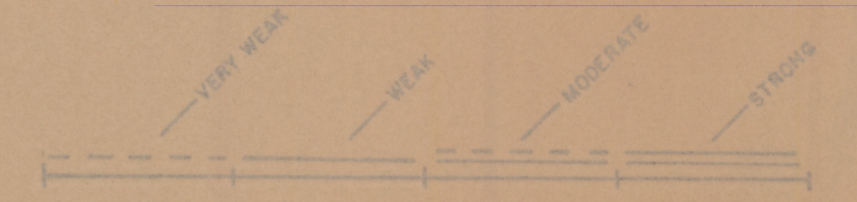

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps

COMMON CORNER JANE 7,8,9,10

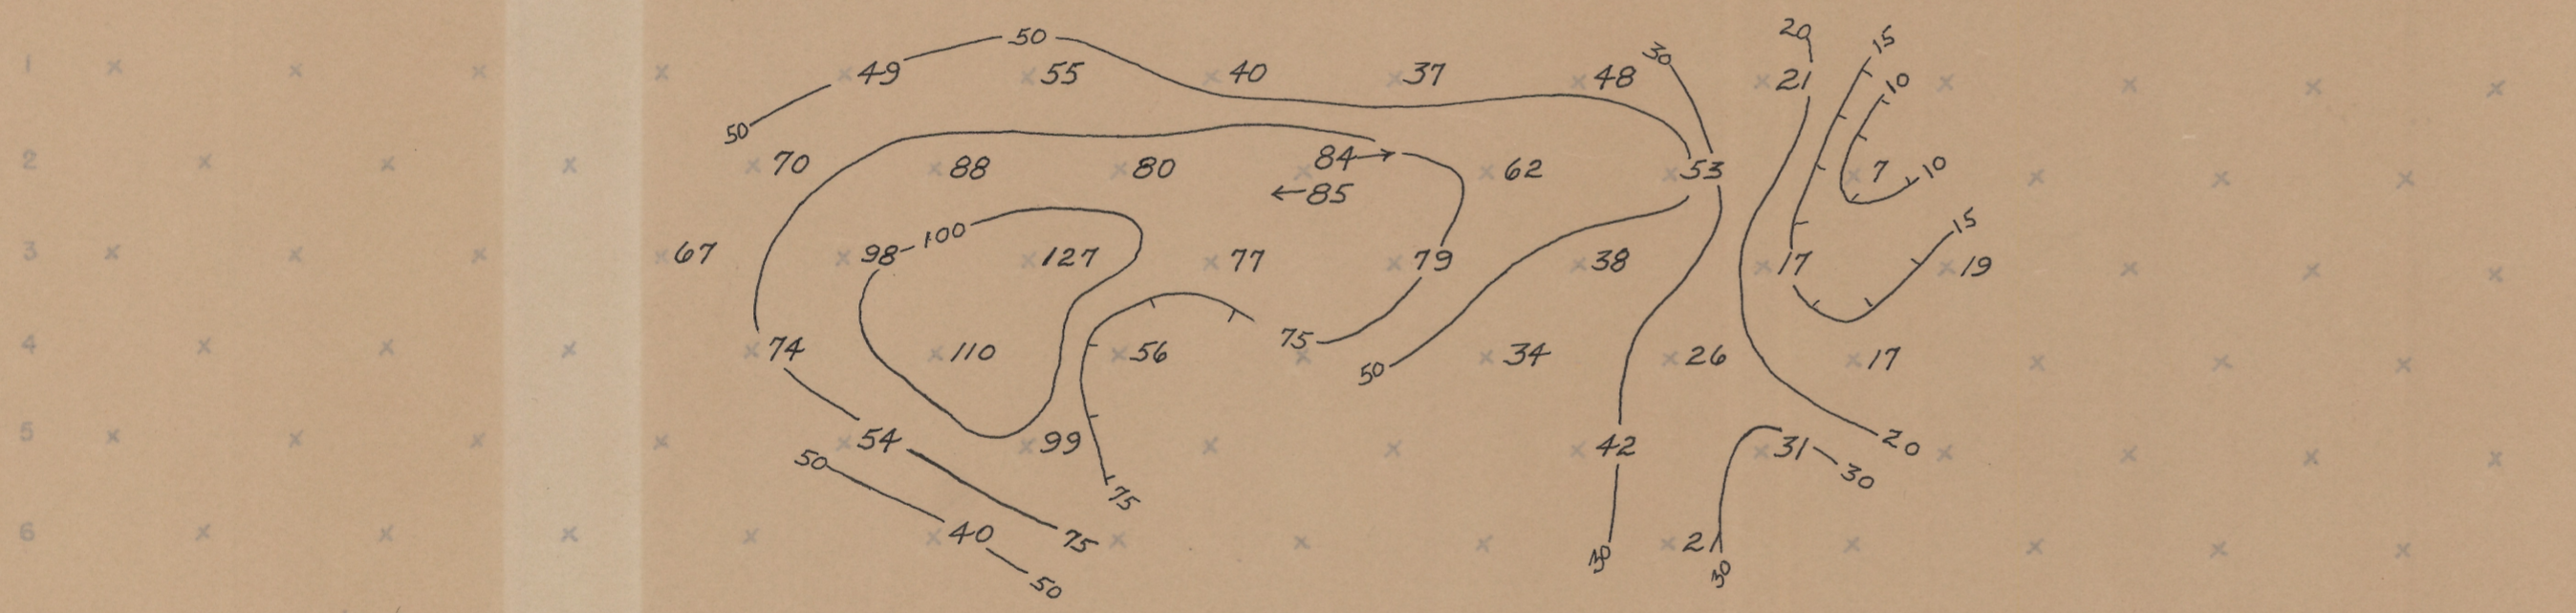

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) (MCF = PFE \* 1000 / ρ<sub>OC</sub>)  
CONTOUR INTERVAL LOGARITHMIC

SECTIONAL DATA SHEET  
LINE No. 3 ~ SPREAD 2  
INDUCED POLARIZATION TRAVERSE  
HALLORAN PROSPECT  
HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1" = 500' DATE: DECEMBER 1963

FOR  
NOBLE & RUCKMICK  
PASADENA, CALIFORNIA

SELF POTENTIAL: ERRATIC; ± 20 MILLIVOLTS NOT PLOTTED  
SURFACE PROFILE  
GEOLOGY, ETC.