

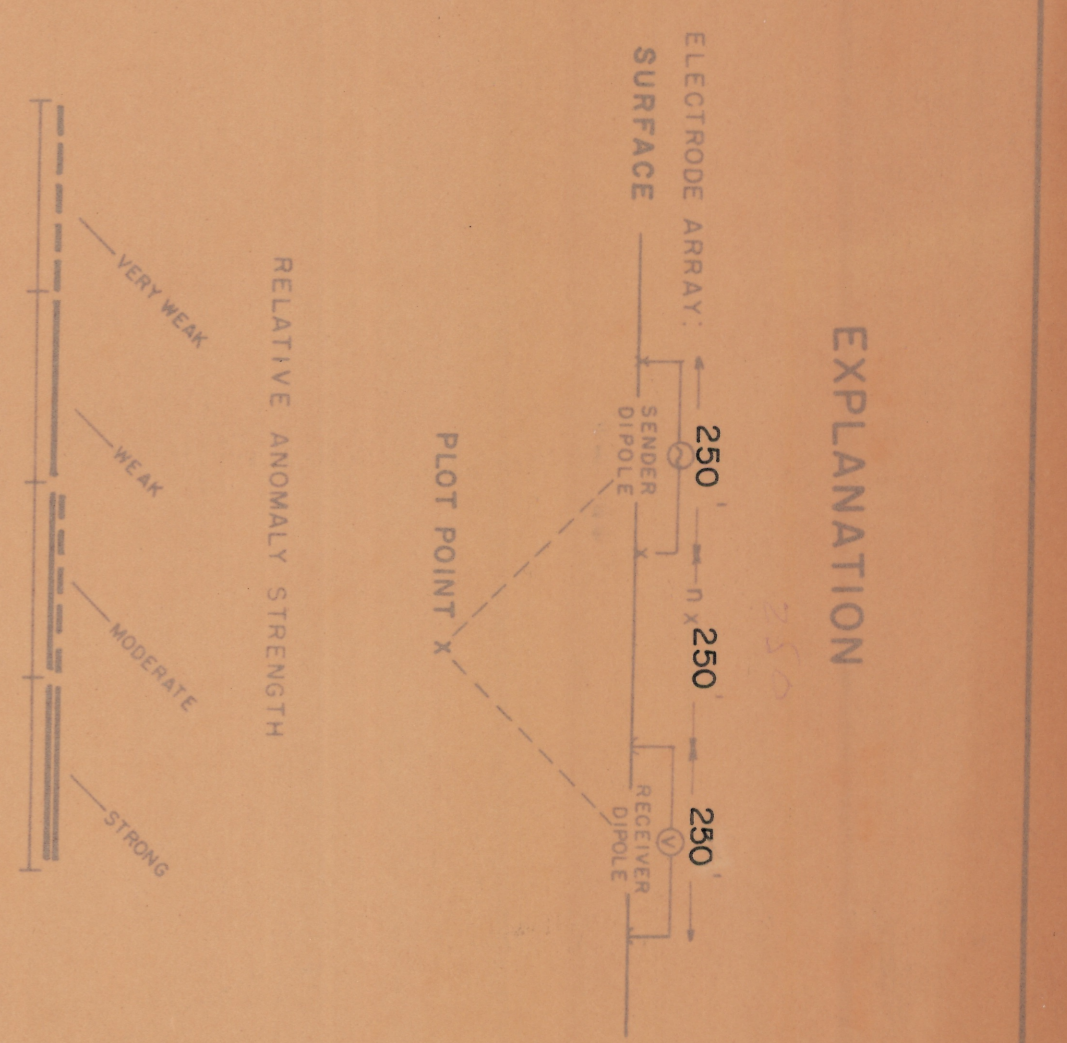


ELECTRODES  
STATIONS SURFACE  
INTERVAL BETWEEN  
SENDER & RECEIVER DIPOLES

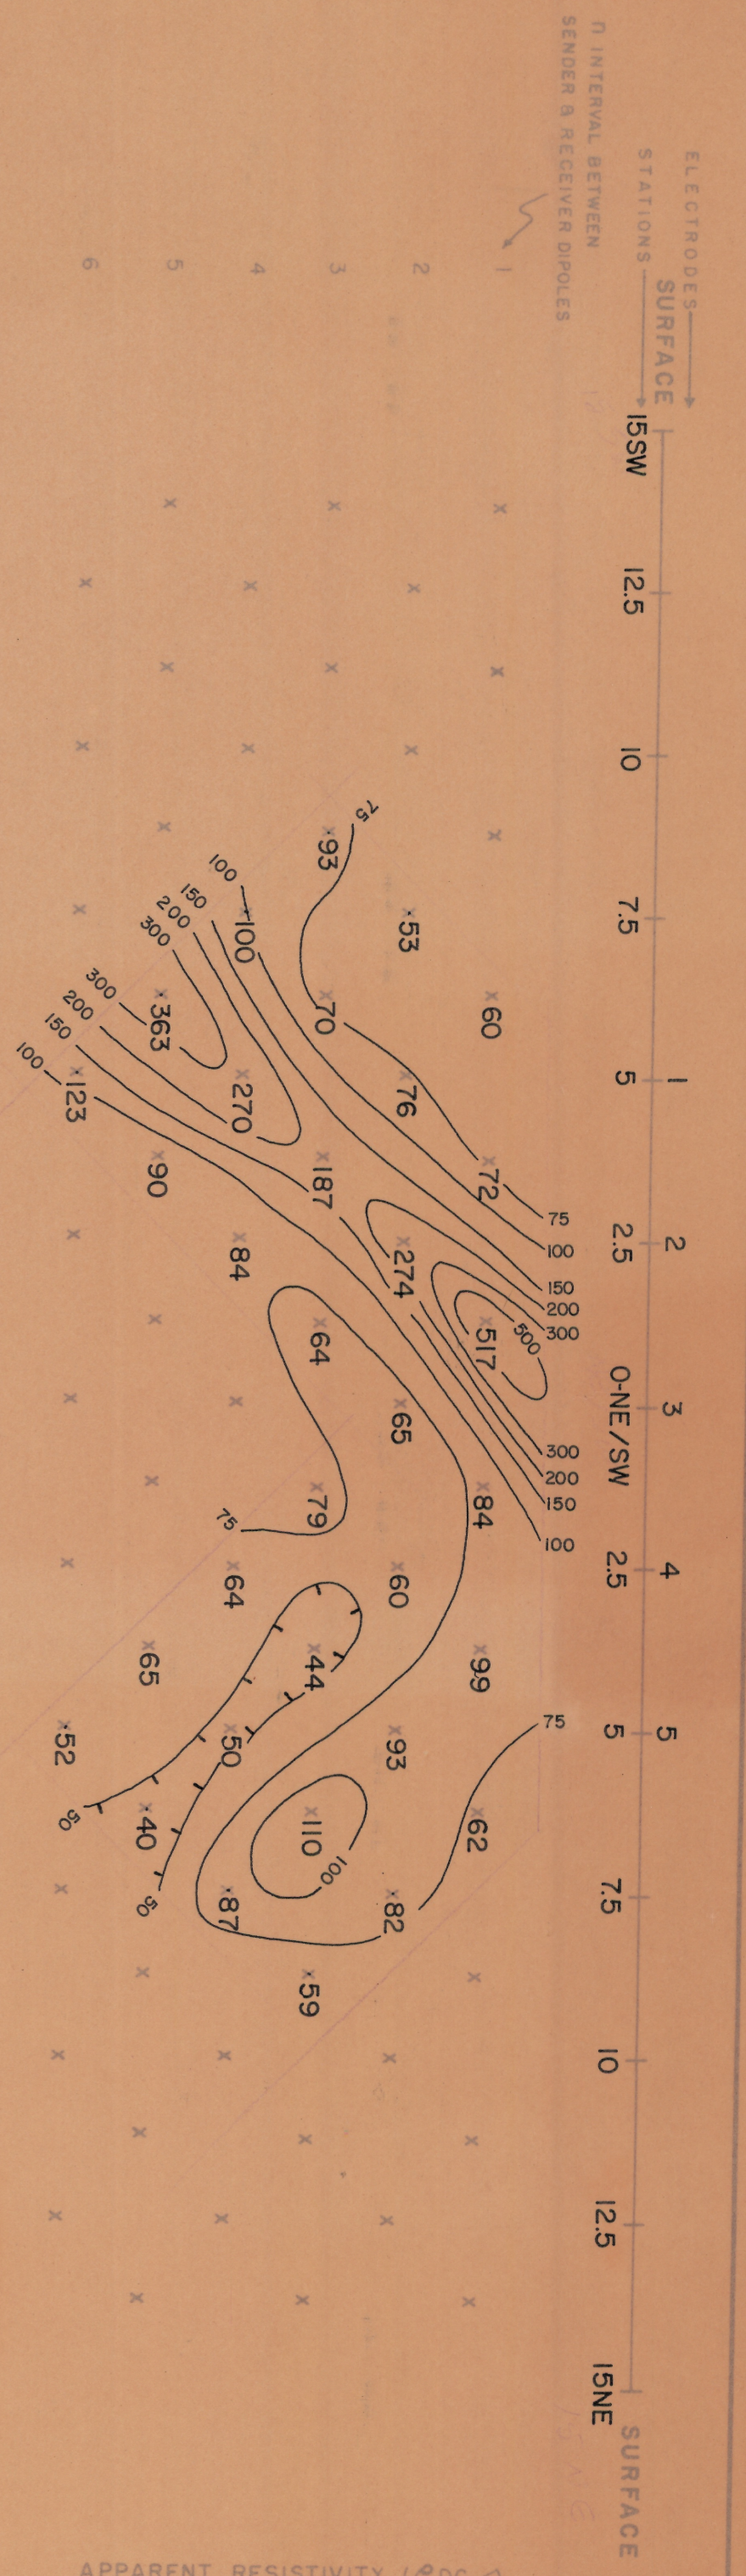


APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  

$$\left( MCF = \frac{PFE \times 1000}{\rho_{DC} \times 2L} \right)$$
 CONTOUR INTERVAL LOGARITHMIC

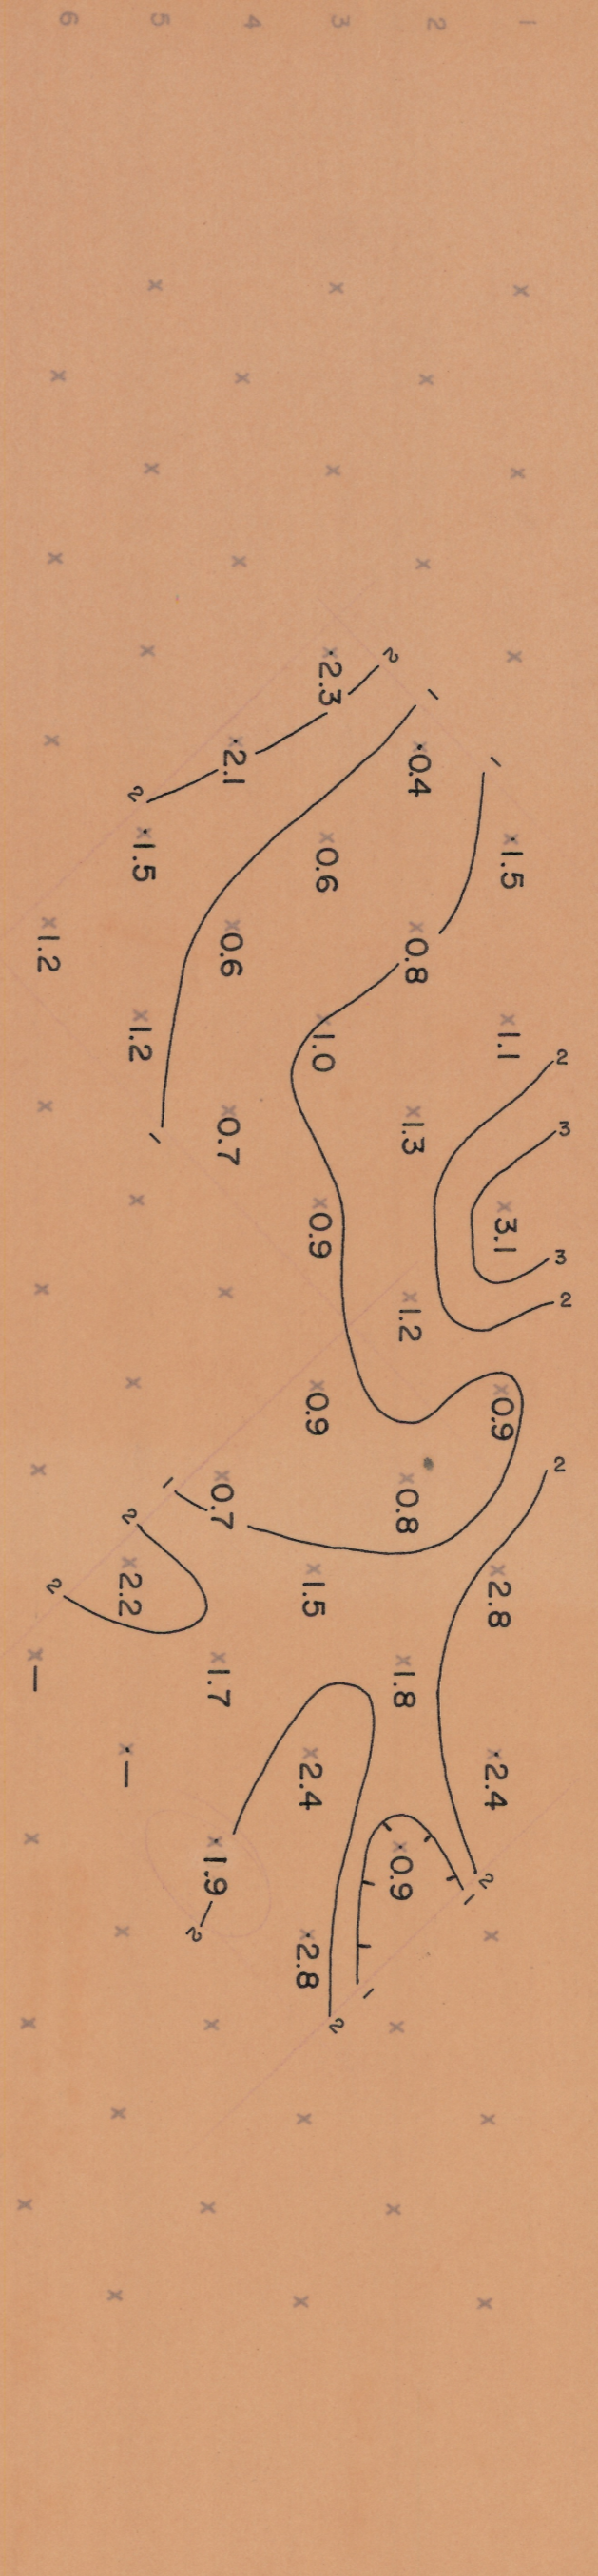


APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  

$$\left( MCF = \frac{PFE \times 1000}{\rho_{DC} \times 2L} \right)$$
 CONTOUR INTERVAL LOGARITHMIC

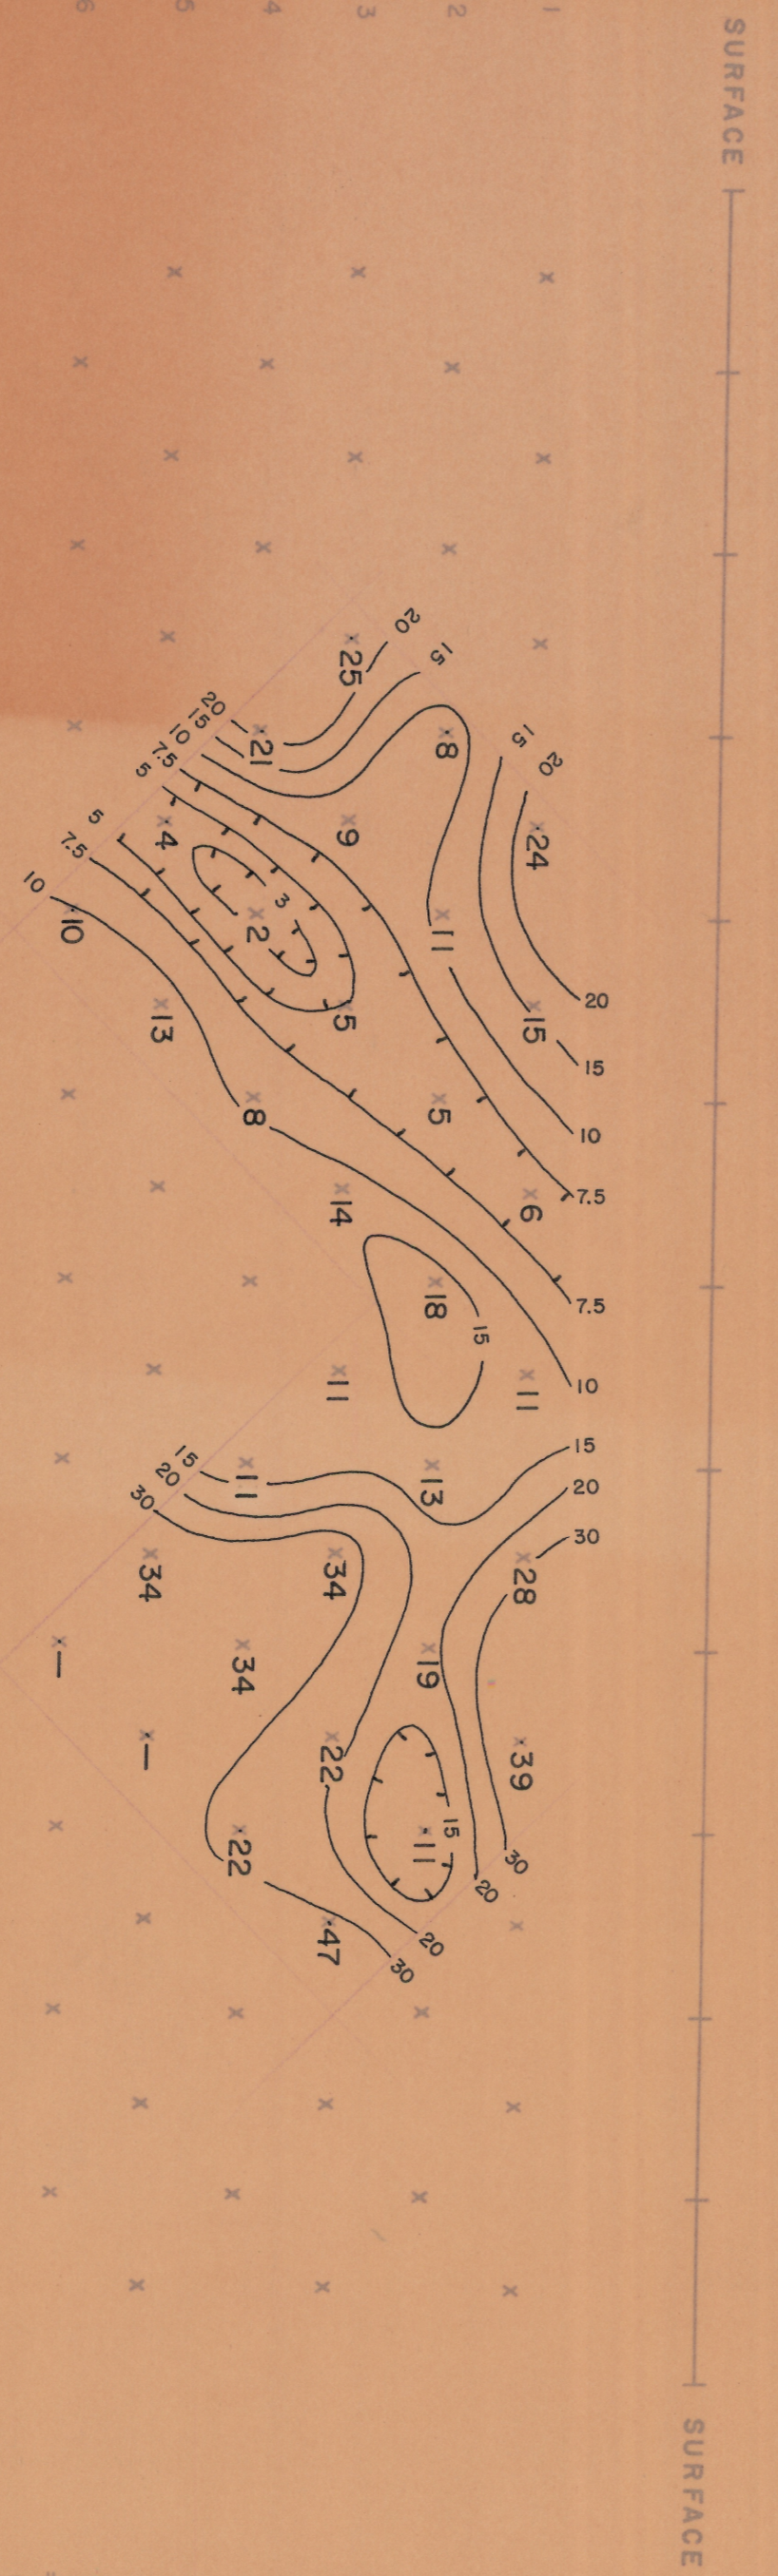

(SELF POTENTIAL) MILLIVOLTS

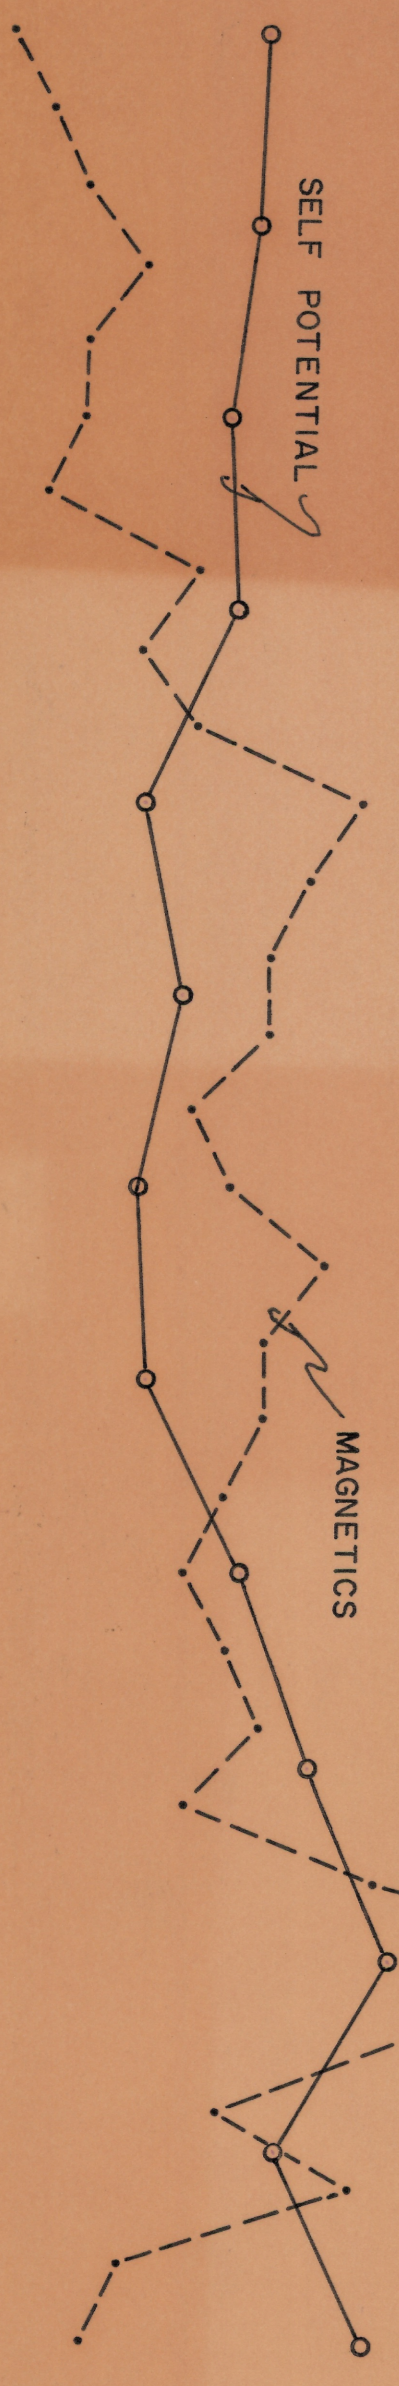

GAMMAS (MAGNETICS)

**KINO PEAK AREA**

SECTIONAL DATA SHEET  
 LINE NO. 1

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY  
 SCALE: 1" = 250' DATE: APR 1967

FOR  
 F & S. CONTRACTING CO.

F103-020-20-105 1415 300 500002

11000033