




ELECTRODES SURFACE STATIONS 32.5SW 300 275 250 22.5 (5.0 SE LINE 2) 20.0 17.5SW 15.0 12.5 10.0 7.5 5.0 2.5 0-NE/SW 2.5 5.0 7.5 10.0 12.5 15.0NE 17.0 19.5 22.0 24.5 NE 270 29.5NE SURFACE

INTERFACE SPREAD 2 SPREAD 1 SPREAD 3


S 13° W N 25° E

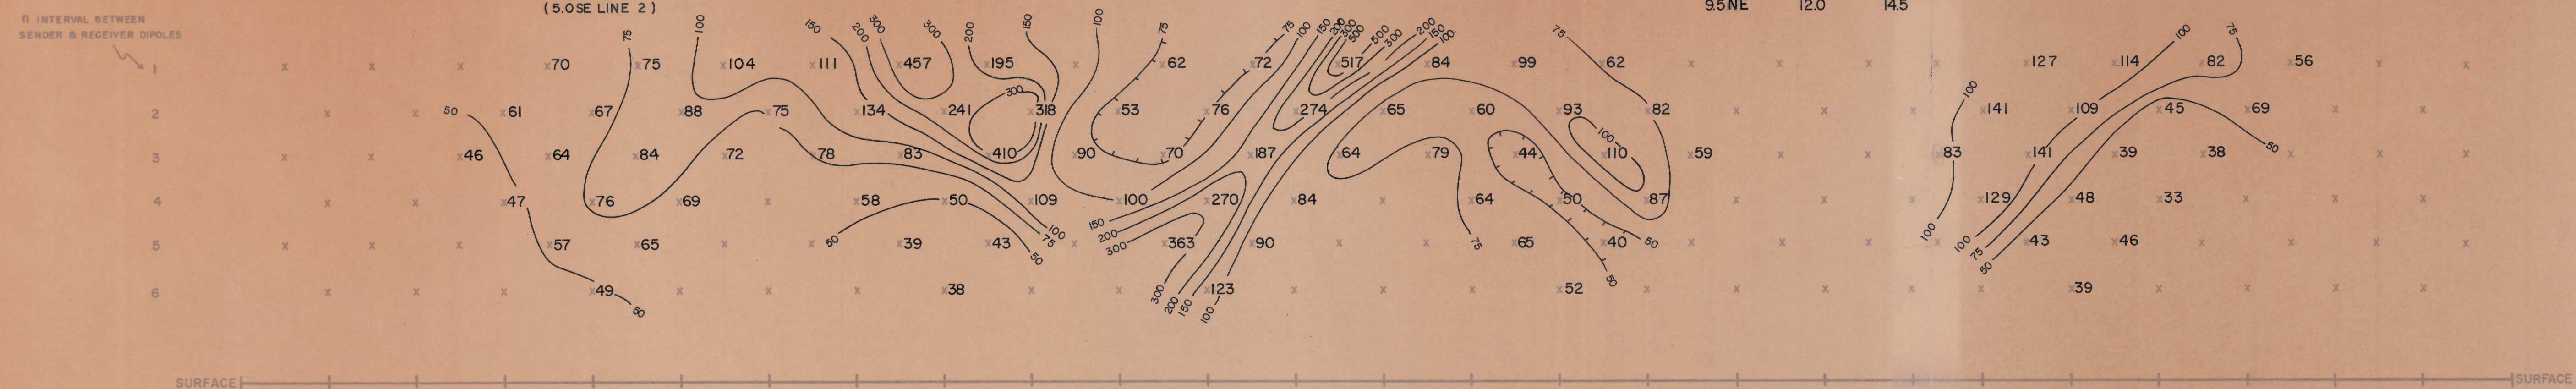

APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET (FT)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 C.P.S.

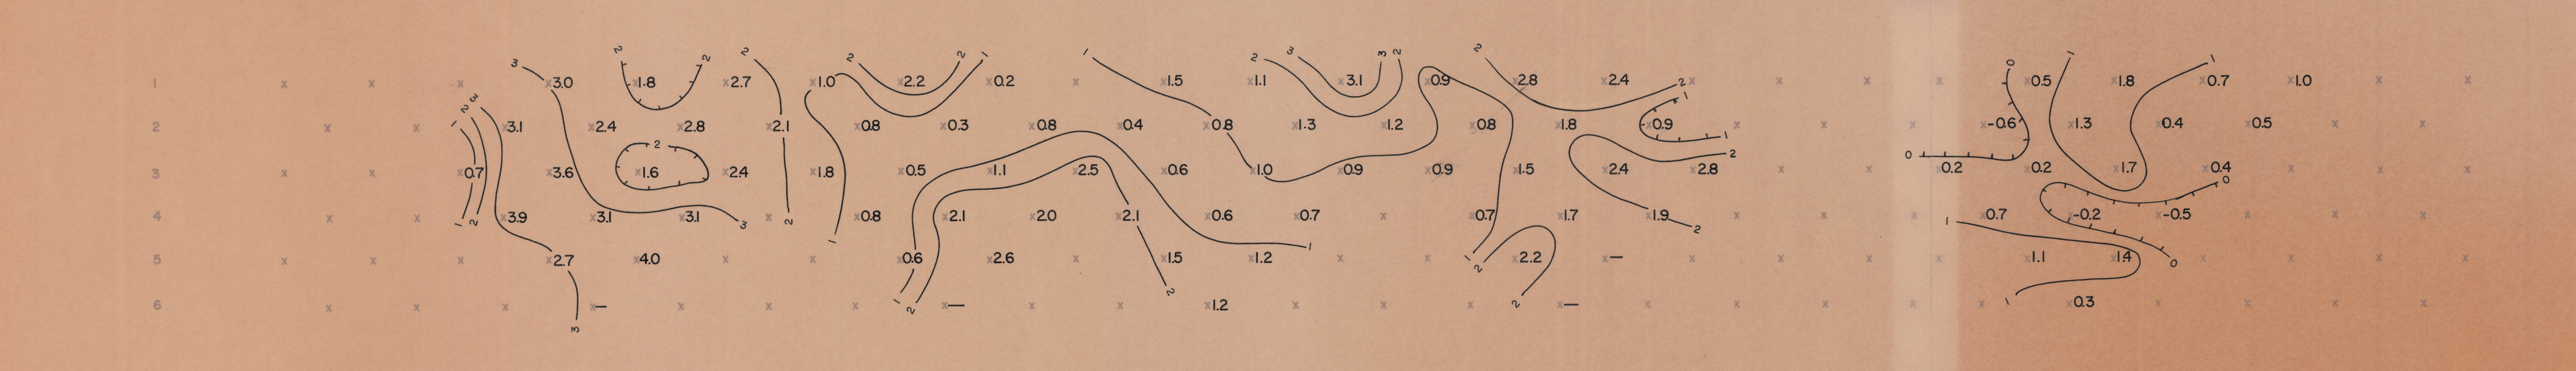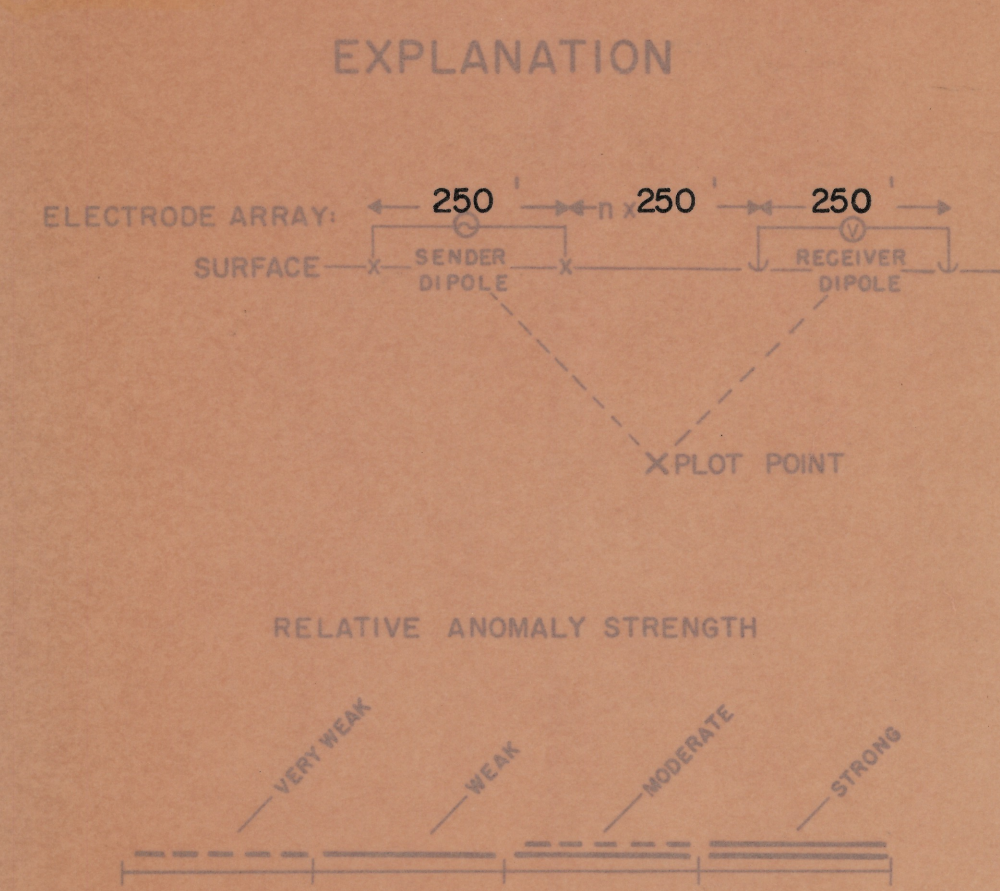

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.

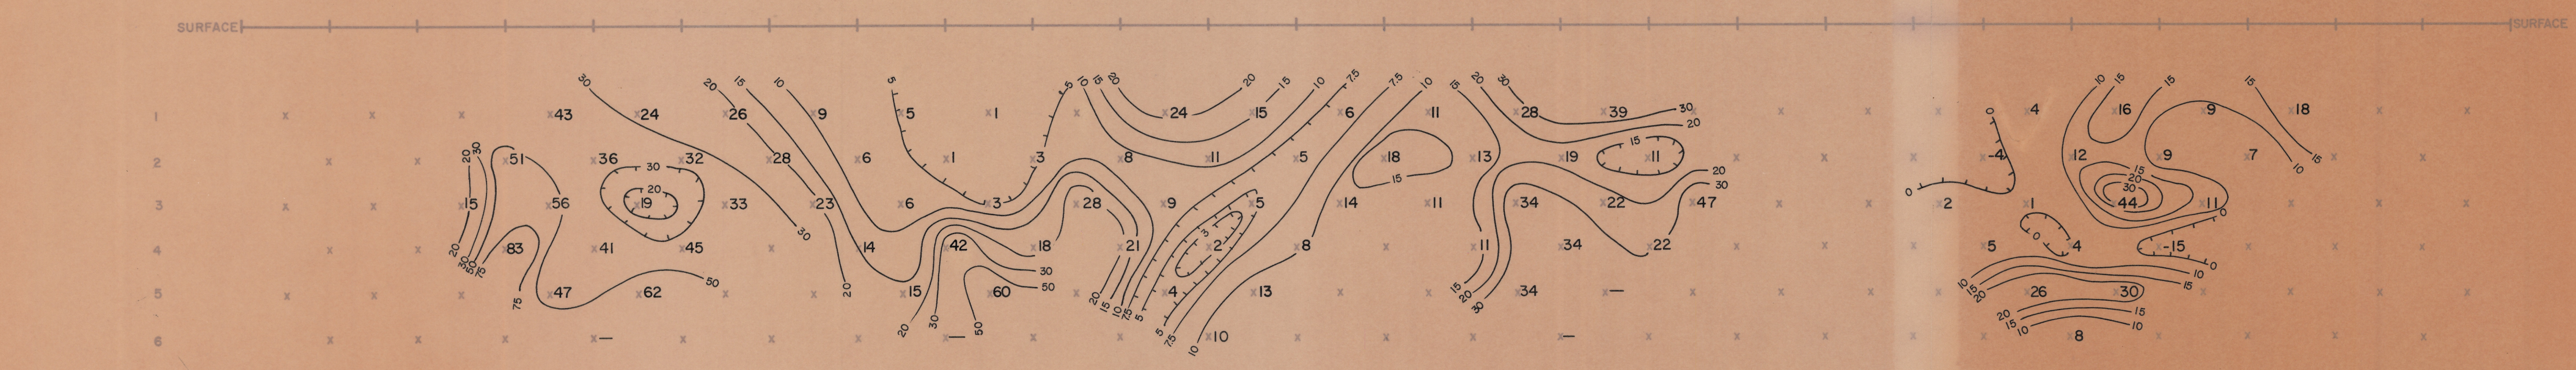


APPARENT "METALLIC CONDUCTION" FACTOR (MGF) (MGF = PFE x 1000)
 CONTOUR INTERVAL LOGARITHMIC

KINO PEAK AREA

SECTIONAL DATA SHEET
 LINE NO. 1
 INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 250' DATE: MAY 1967

FOR
 F & S CONTRACTING CO.

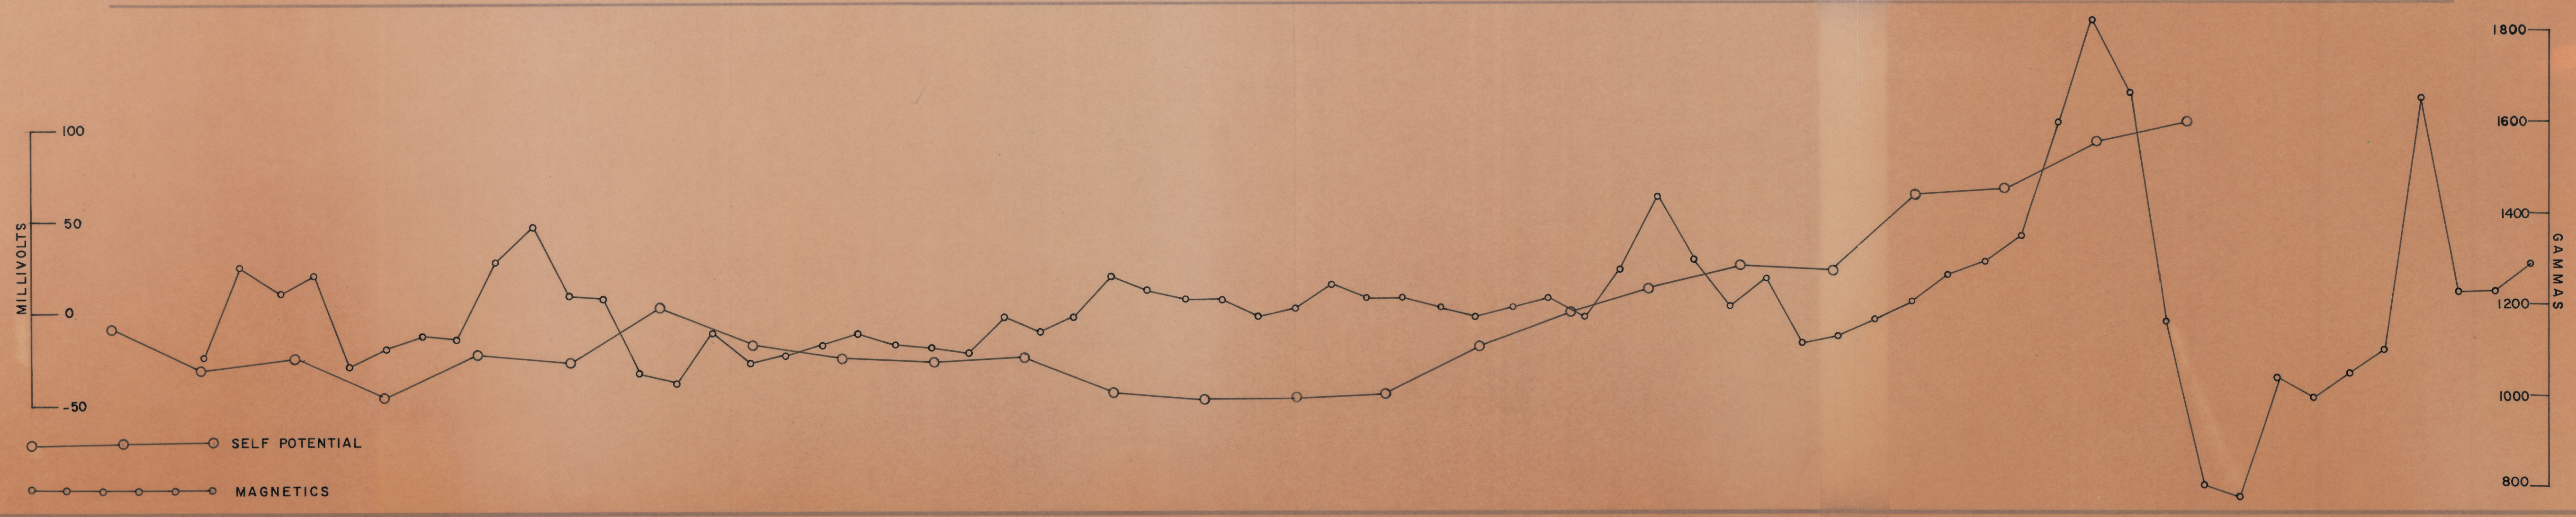

8100-050-20-05 MFC 29 km