
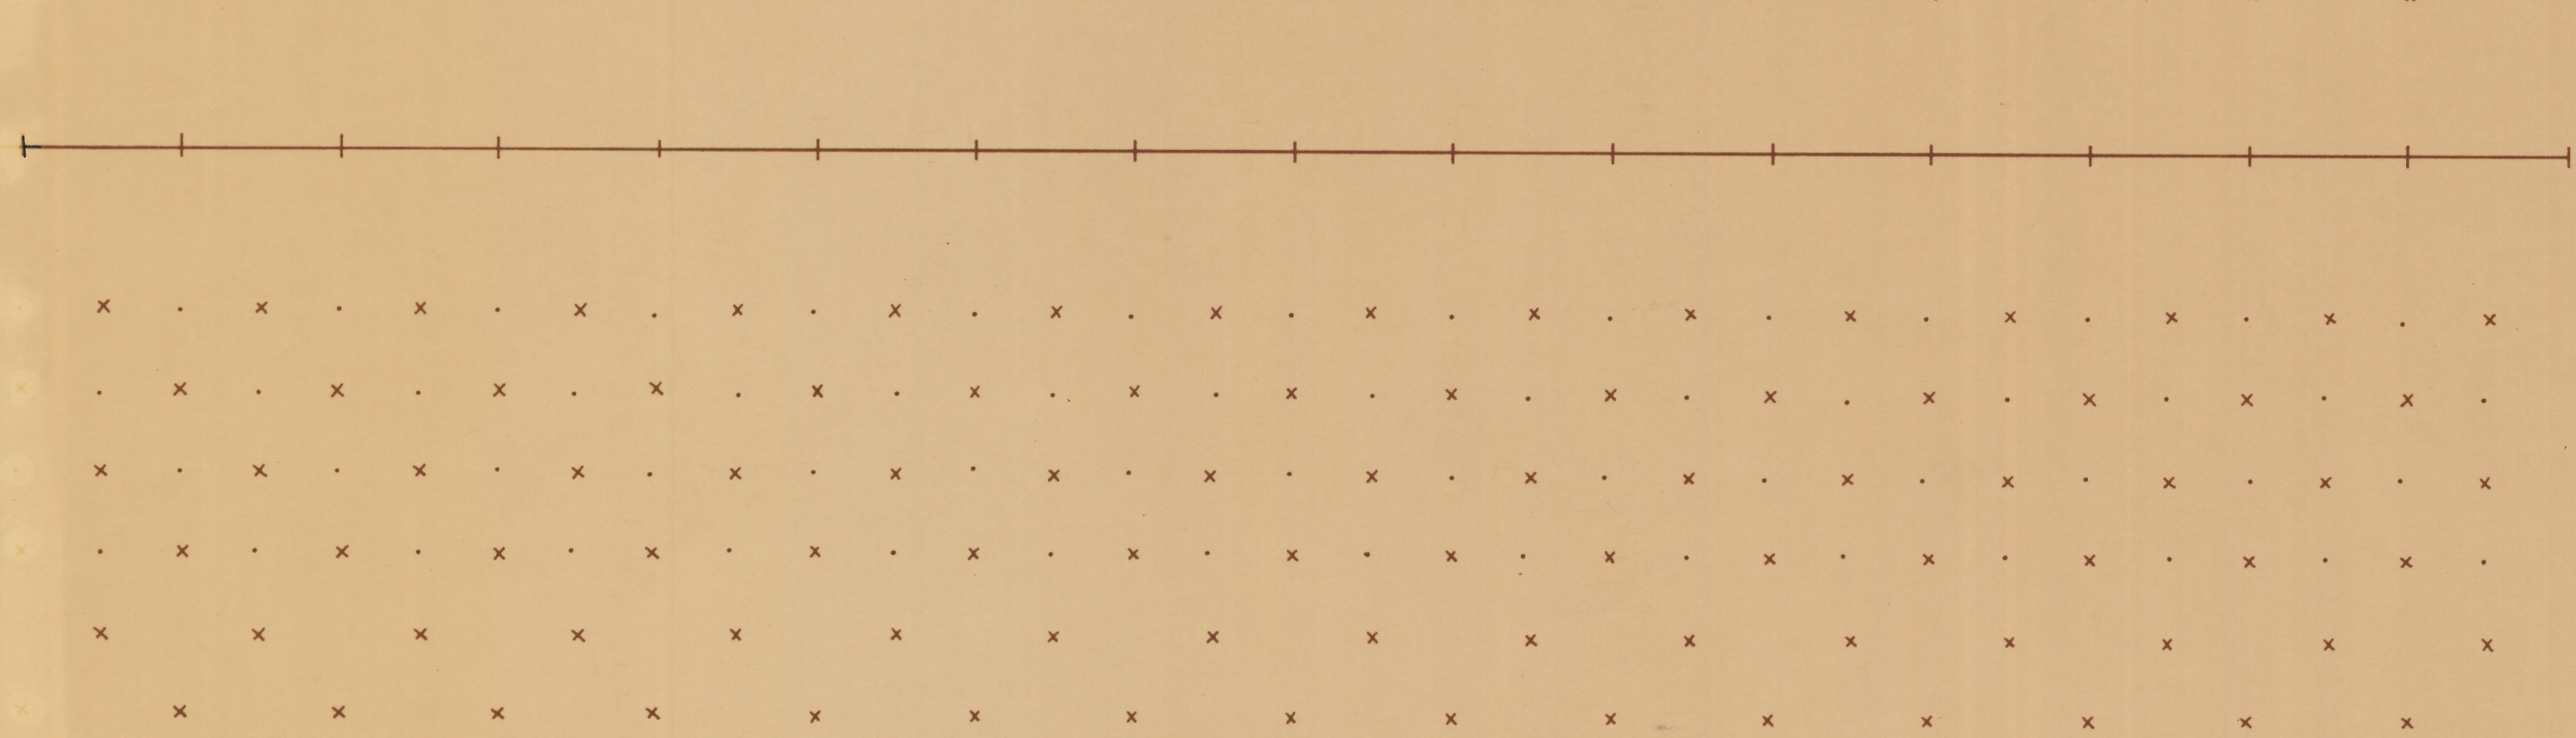
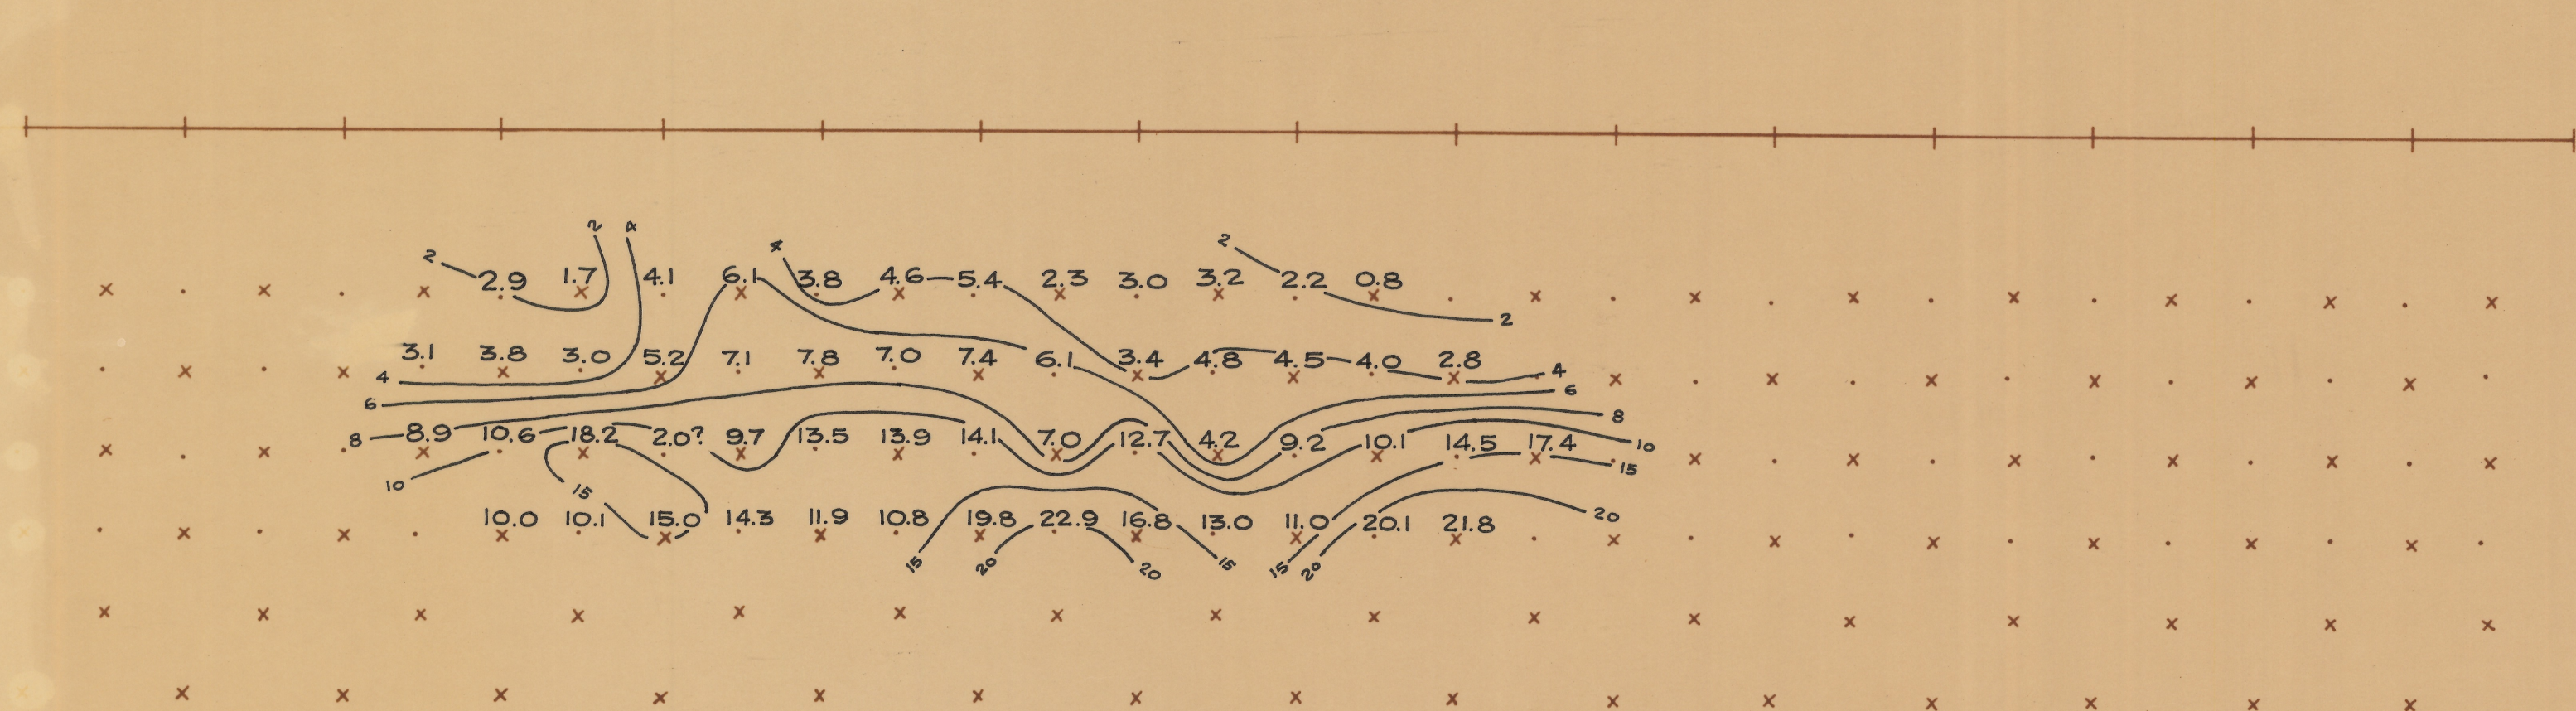


SET 1 SET 2 SET 3 SET 4 SET 5

1 2 3 4 5 6 7 1 2 3 4 5 6 7 1 2 3 4 5 6 7 1 2 3 4 5 6 7

75W 50W 25W 0+00 25E 50E

ELECTRODES STATIONS


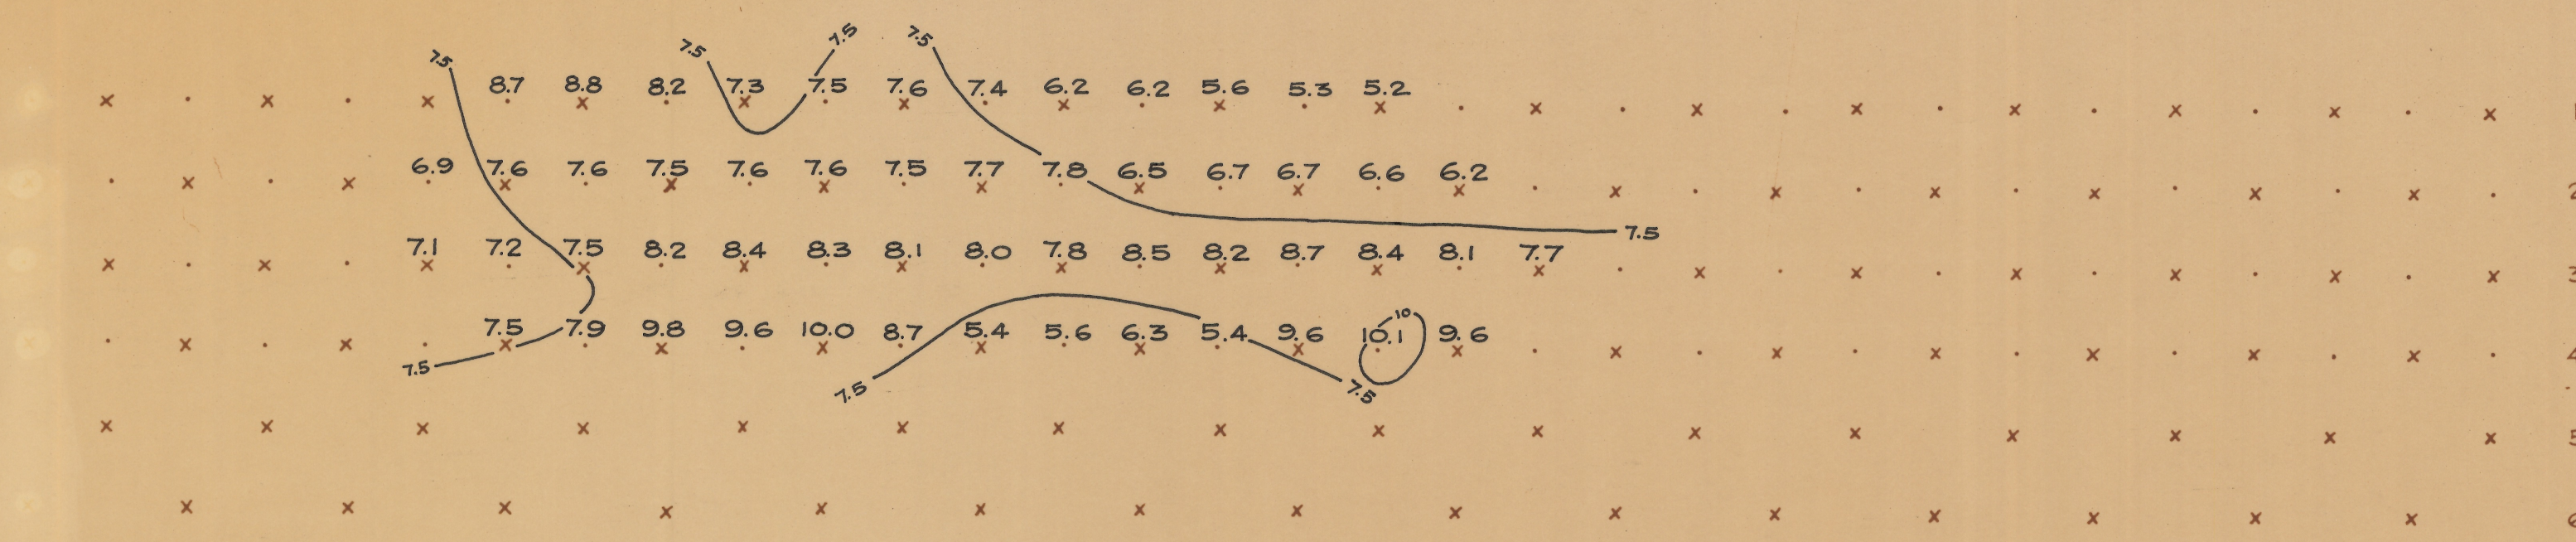


Apparent Resistivity (ρ_{DC})
in units of OHM-Feet $\frac{\rho_{DC}}{2\pi}$
Contour Interval Logarithmic
Sender Frequency: 0.05 c.p.s.

Percent Frequency Effect (PFE)
Contour Interval Constant
Sender Frequencies: 0.05 & 1.0 c.p.s.

Apparent "Metallic Conduction" Factor (MCF)
 $(MCF = \frac{PFE \times 1000}{\rho_{DC}})$
Contour Interval Logarithmic
(Madden Parameter)

EXPLANATION

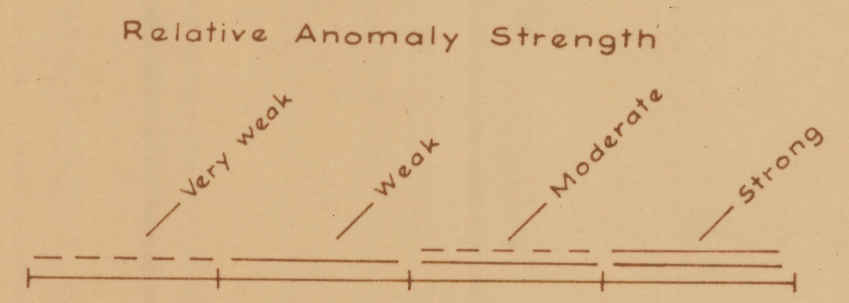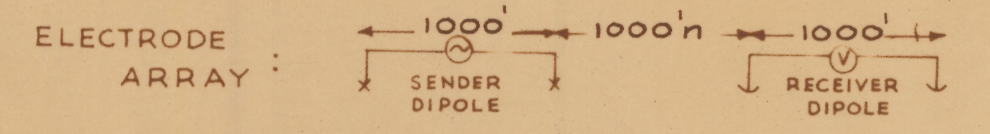

LOOKING N 27°30'E

WINKLER FAULKNER PROJECT
SECTIONAL DATA SHEET
LINE NO. 1 (0 North)
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: FEB. 1965
For
NEWMONT-HECLA JOINT VENTURE

250-010-003-0102