



ELECTRODES STATIONS

Apparent Resistivity (ρ_{DC})
in units of OHM-Feet $\times 2\pi$
Contour Interval Logarithmic
Sender Frequency: 0.05 cps

Percent Frequency Effect (PFE)
Contour Interval Constant
Sender Frequencies: 0.05 & 1.0 cps

Apparent Metallic Conduction Factor (MCF)
($MCF = \frac{PFE \times 1000}{\rho_{DC} \times 2\pi}$)
Contour Interval Logarithmic
(Madden Parameter)

EXPLANATION

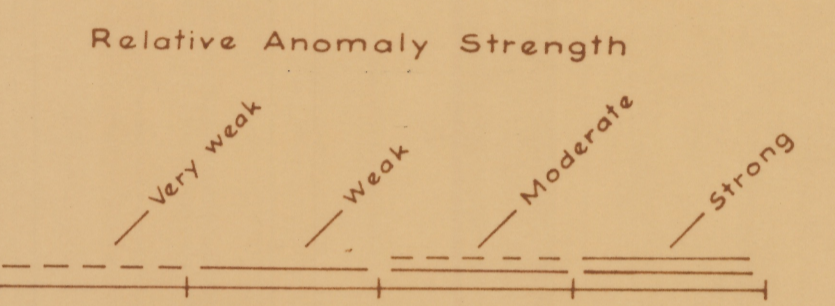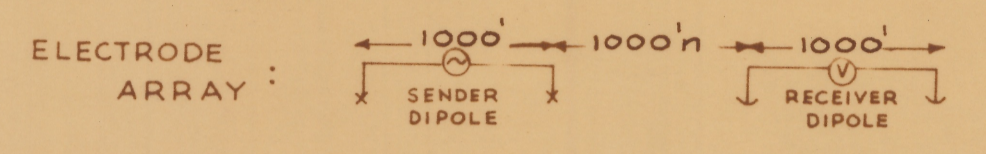

LOOKING N 27° 30' E

WINKLER FAULKNER PROJECT
SECTIONAL DATA SHEET
LINE NO. 3 (4000 North)
INDUCED POLARIZATION TRAVERSE
HEINRICHS GEOEXPLORATION COMPANY
SCALE: 1" = 1000' DATE: FEB. 1965
For
NEWMONT-HECLA JOINT VENTURE

0800-880-00-05-11130 10/11/65