


TO 5&6 NW4
 3 2 1 0 6SW 5SW 4SW 3SW 2SW 1SW 0 1NW 2NW 3NW 4NW 5NW 6NW


INTERVAL BETWEEN
 SENDER'S RECORDS = 1000

EXPLANATION

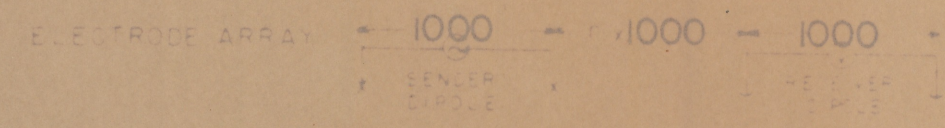

APPARENT RESISTIVITY (Ω) IN UNITS OF OHM FEET (MT)
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 CPS

RELATIVE ANOMALY STRENGTH

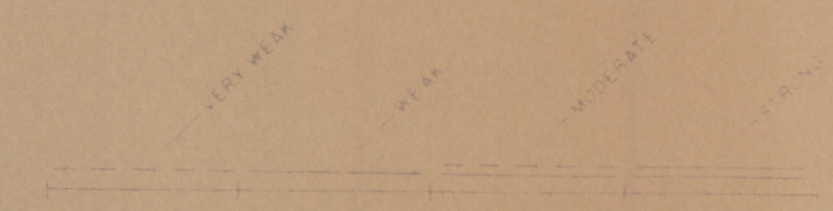

NORTH-LOOKING WESTERLY

PERCENT FREQUENCY EFFECT (PEF)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 to 3.0 CPS

NORTH STAR MINE AREA
 PINAL COUNTY, ARIZ.

SECTIONAL DATA SHEET
 LINE NO. 1


INDUCED POLARIZATION TRAVERSE

HEINRICH'S GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: 9-64

FOR
 THE MAGMA COPPER CO.

APPARENT METRIC CONDUCTIVITY FACTOR (MCF)
 (1/Ω) (PE x 1000)
 CONTOUR INTERVAL LOGARITHMIC

SELF-POTENTIAL
 SURFACE PROFILE
 GEOLOGY, ETC.

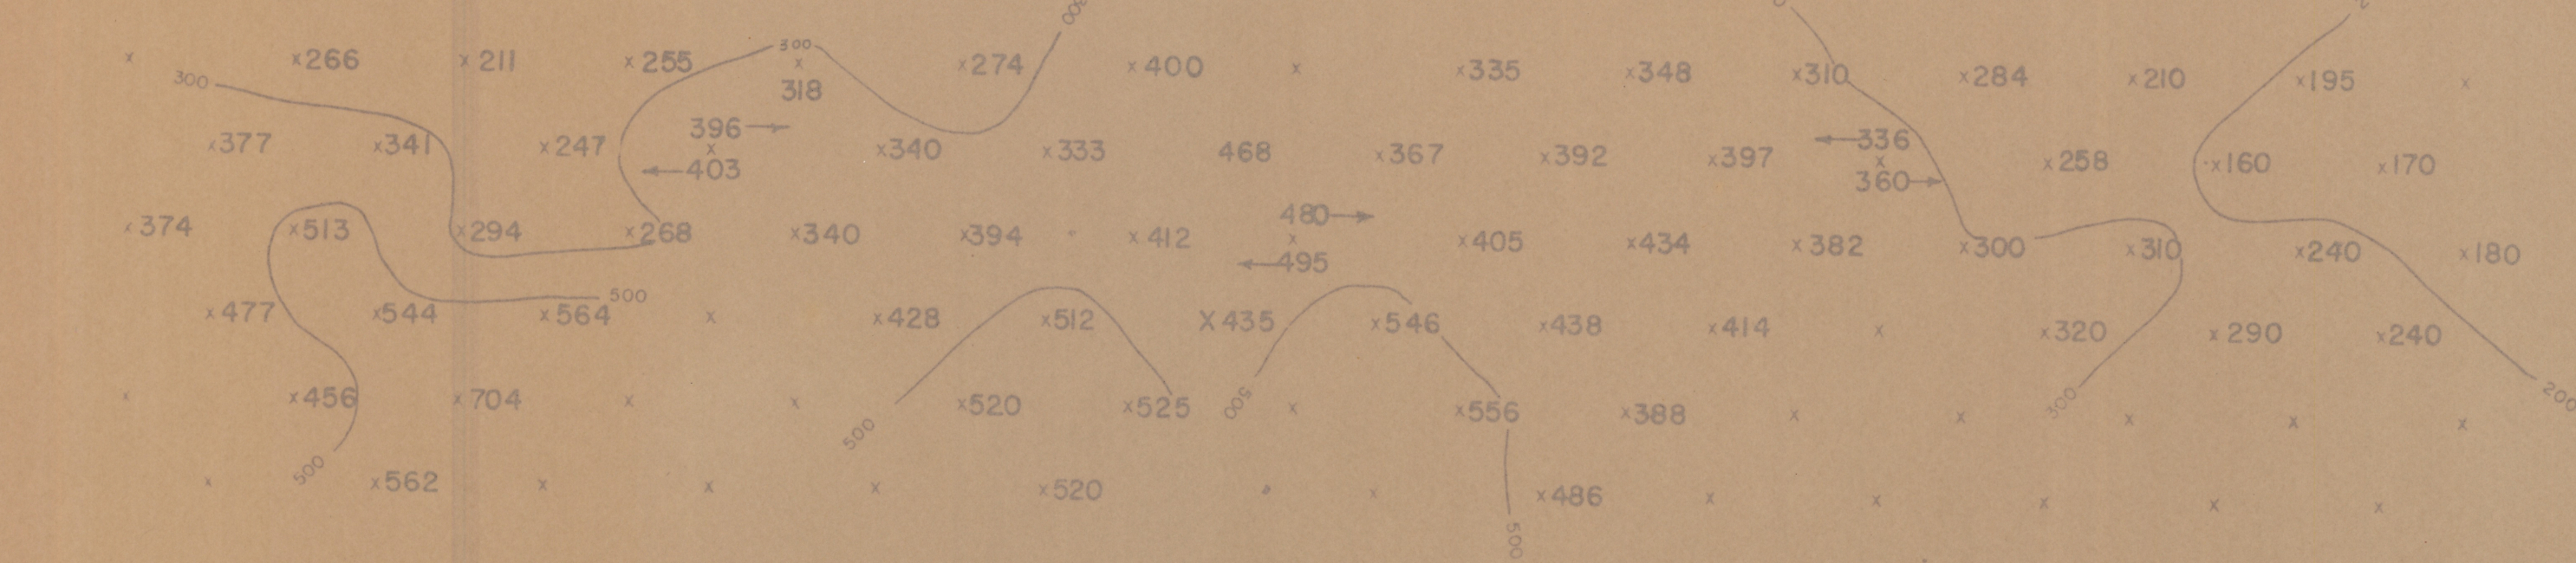

PROPOSED D.D.H.

