





ELECTRODES
 TO 586 NW4
 INTERVAL BETWEEN
 SENDER & RECEIVER POLES

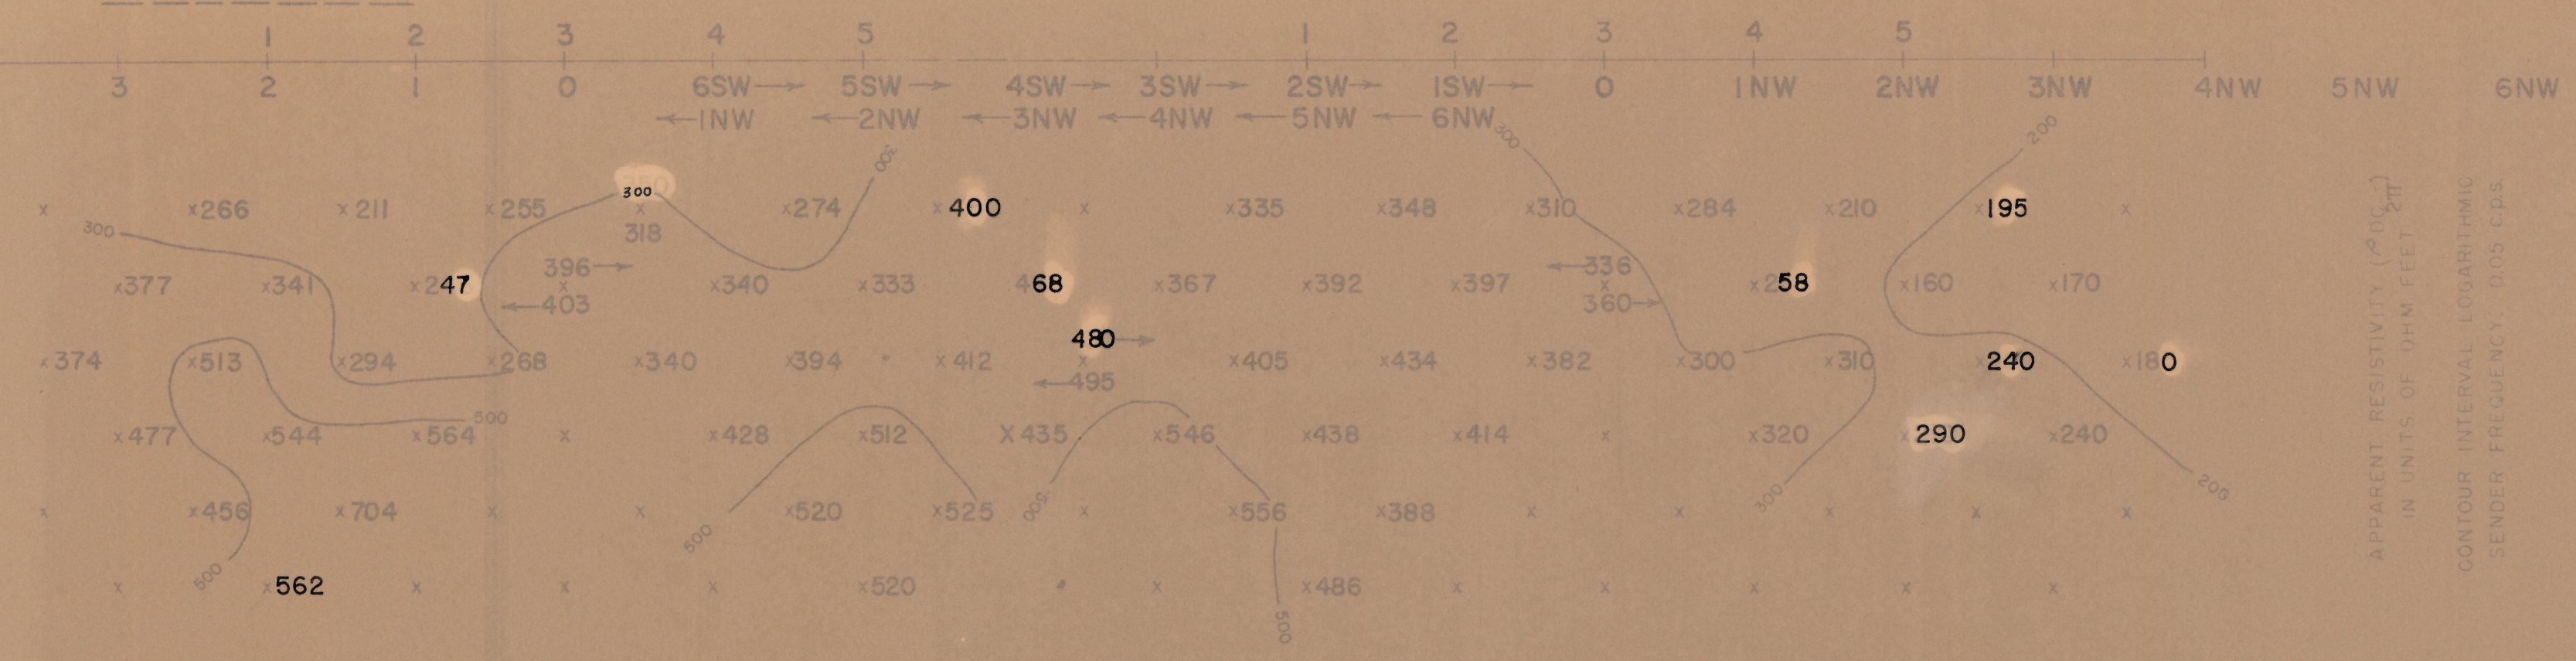

PROPOSED D.D.H.

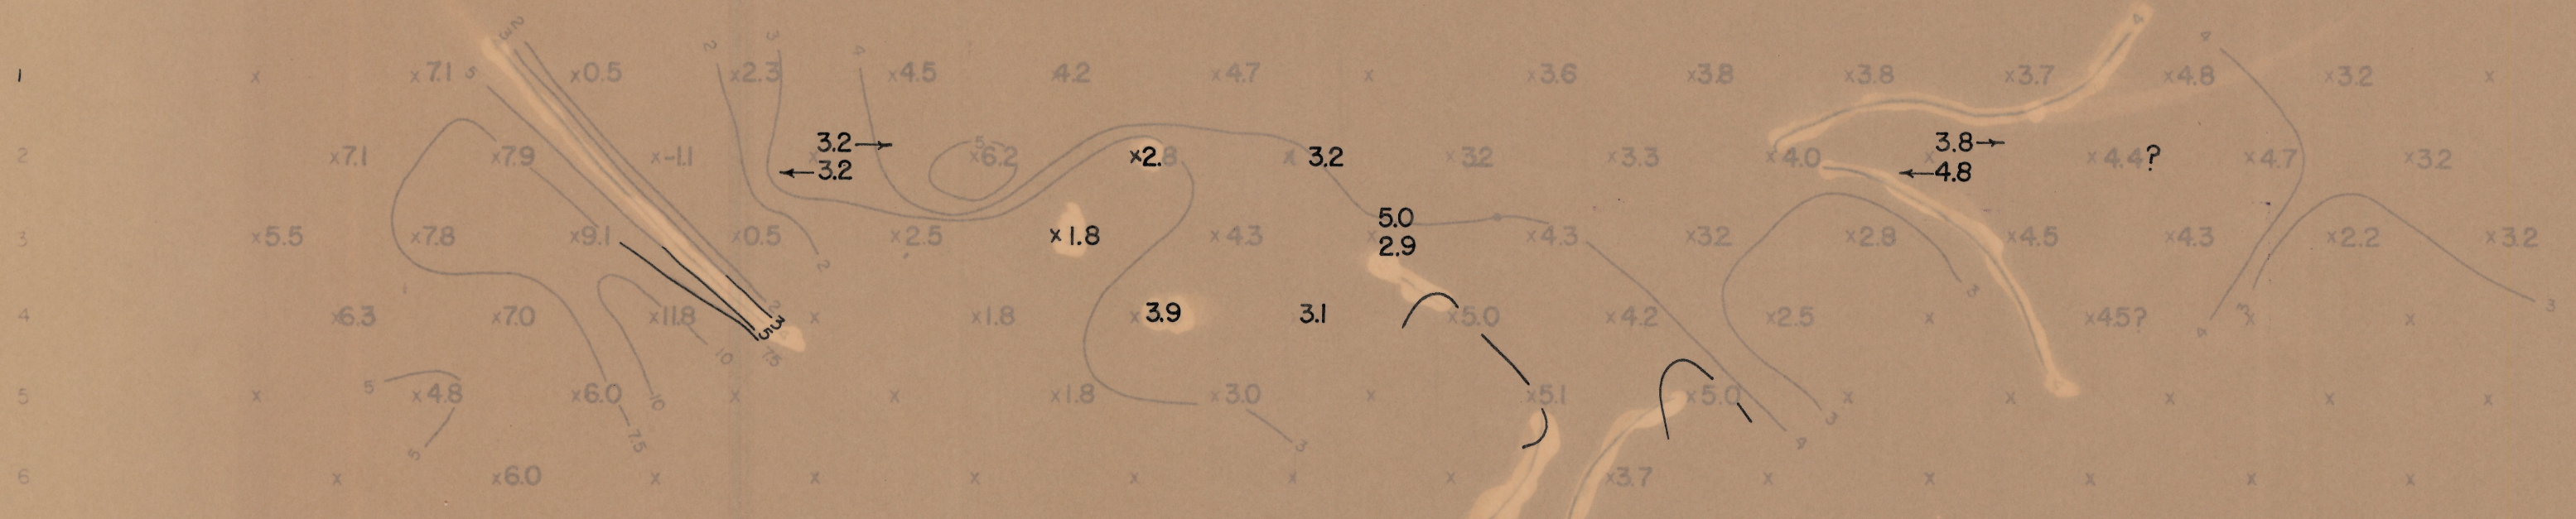

APPARENT RESISTIVITY (P) IN UNITS OF OHM FEET 2M
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 CPS

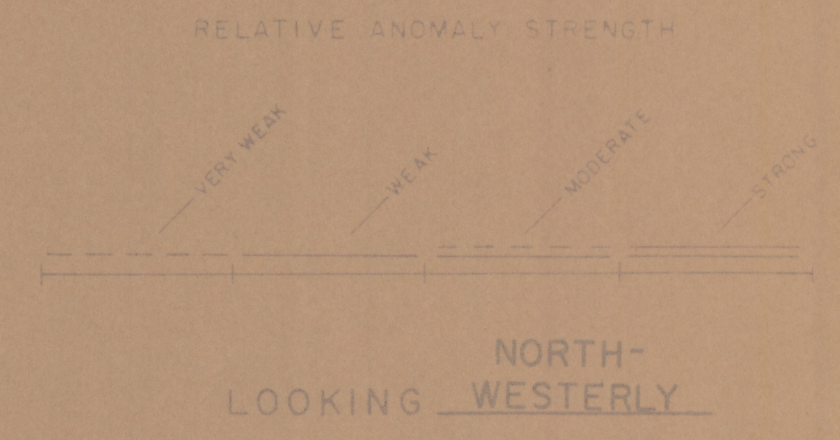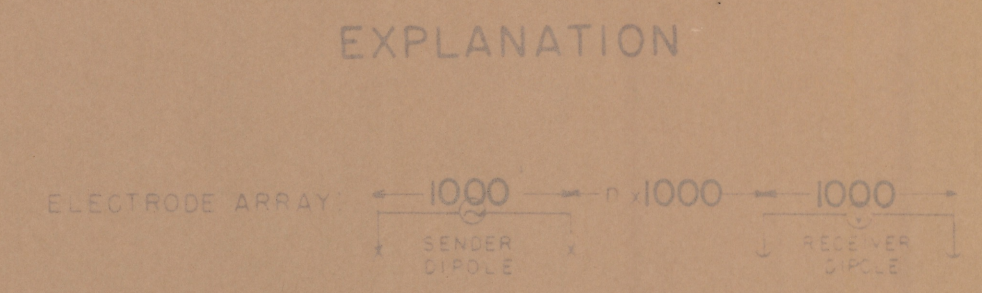

PERCENT FREQUENCY EFFECT (PFE)
 CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 CPS

NORTH STAR MINE AREA
 PINAL COUNTY, ARIZ.
 SECTIONAL DATA SHEET
 LINE NO. 1
 INDUCED POLARIZATION TRAVERSE
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1"=1000' DATE: 9-64

APPARENT METALLIC CONDUCTION FACTOR (MCF)
 (MCF = PFE x 1000)
 CONTOUR INTERVAL LOGARITHMIC

FOR
 THE MAGMA COPPER CO.

SELF POTENTIAL
 SURFACE PROFILE
 GEOLOGY, ETC.

Scanned by 85/11/2005-05-05 11/18/05