



ELECTRODES
STATIONS
210 ← 195 ← 180 ← 165 ← 150 ← 135
INTERVAL BETWEEN
SENDER & RECEIVER POLES

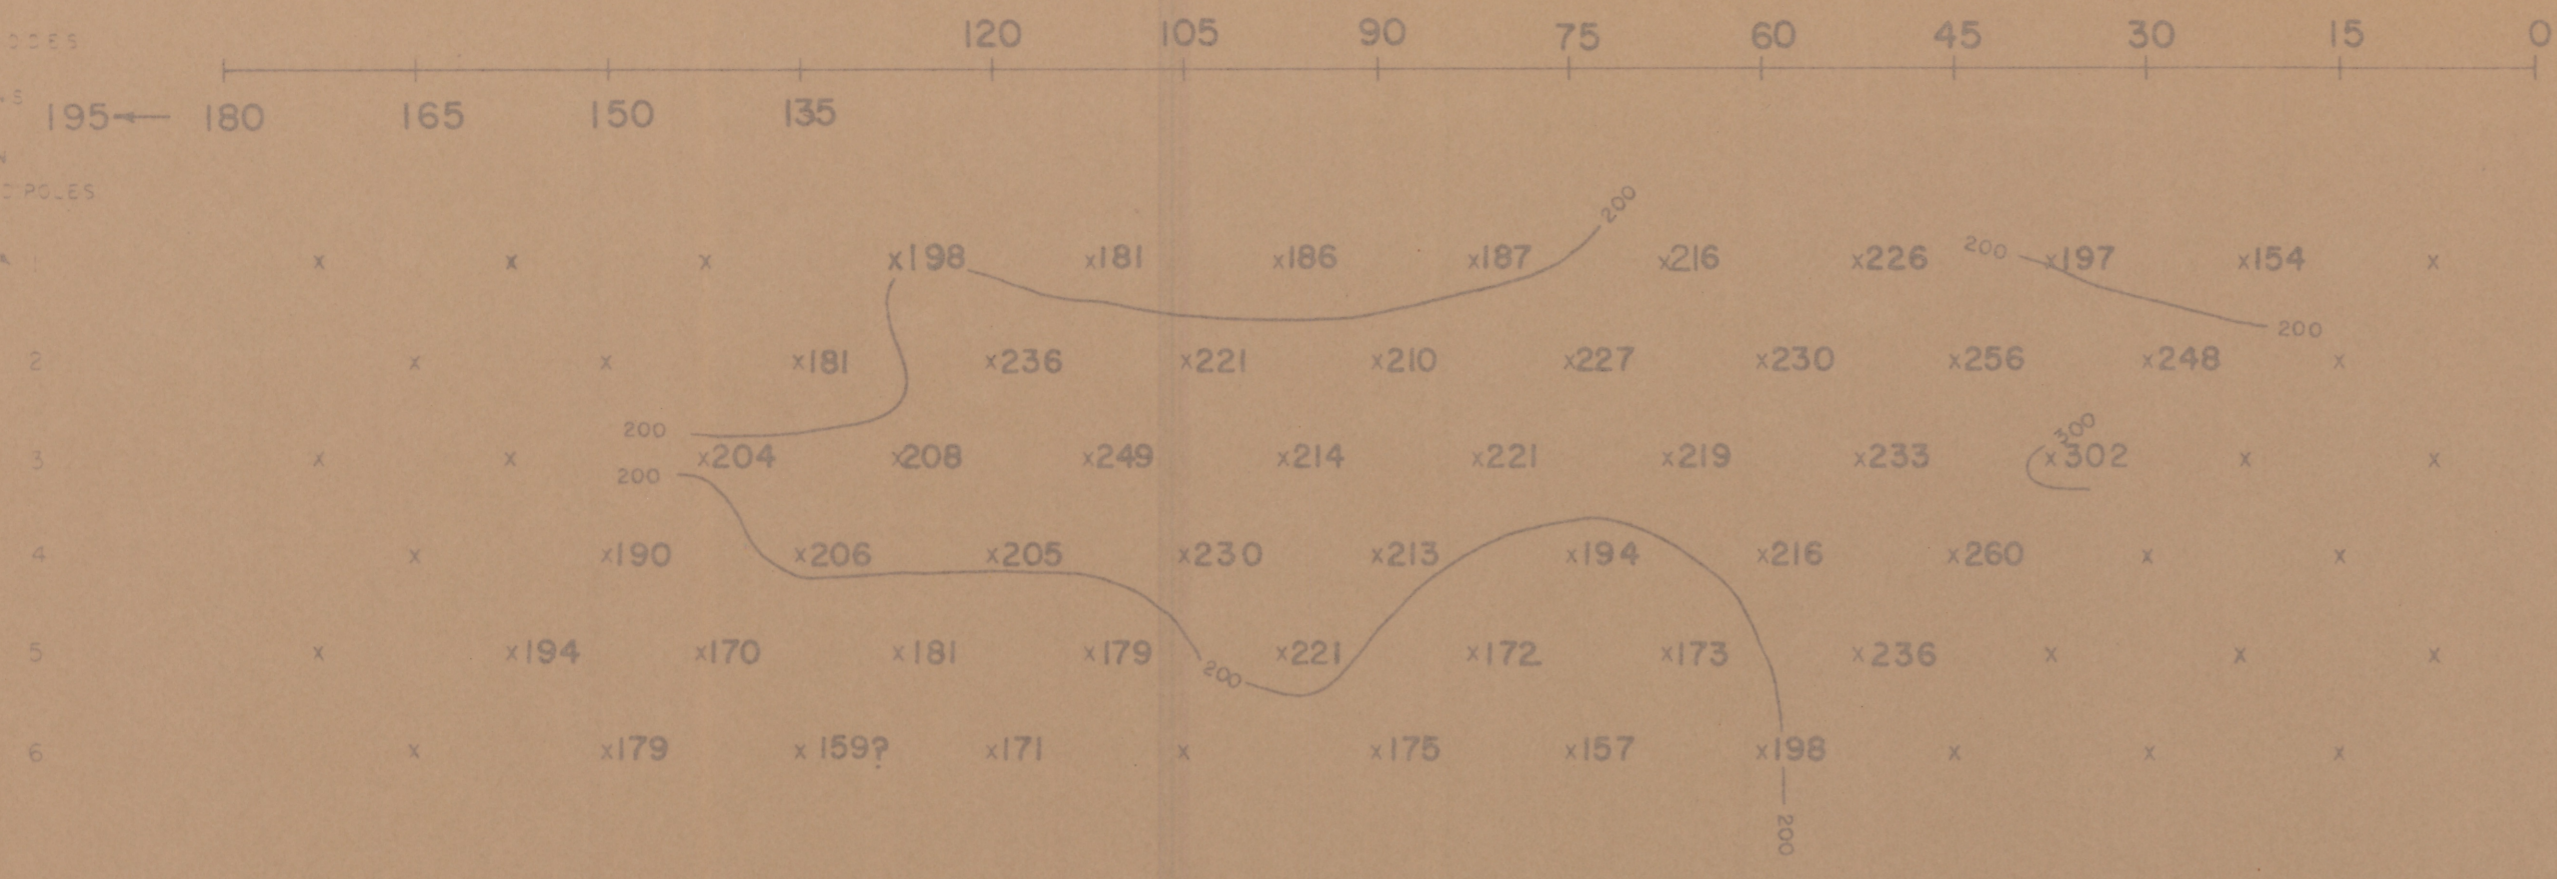


APPARENT RESISTIVITY (ρ_{app})
IN UNITS OF OHM FEET (Ω)
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY: 0.05 C.P.S.


EXPLANATION

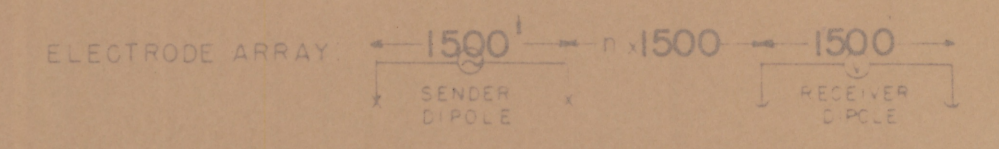

RELATIVE ANOMALY STRENGTH

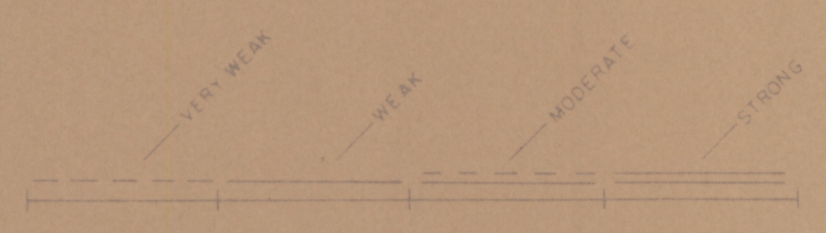

LOOKING NORTHWESTERLY

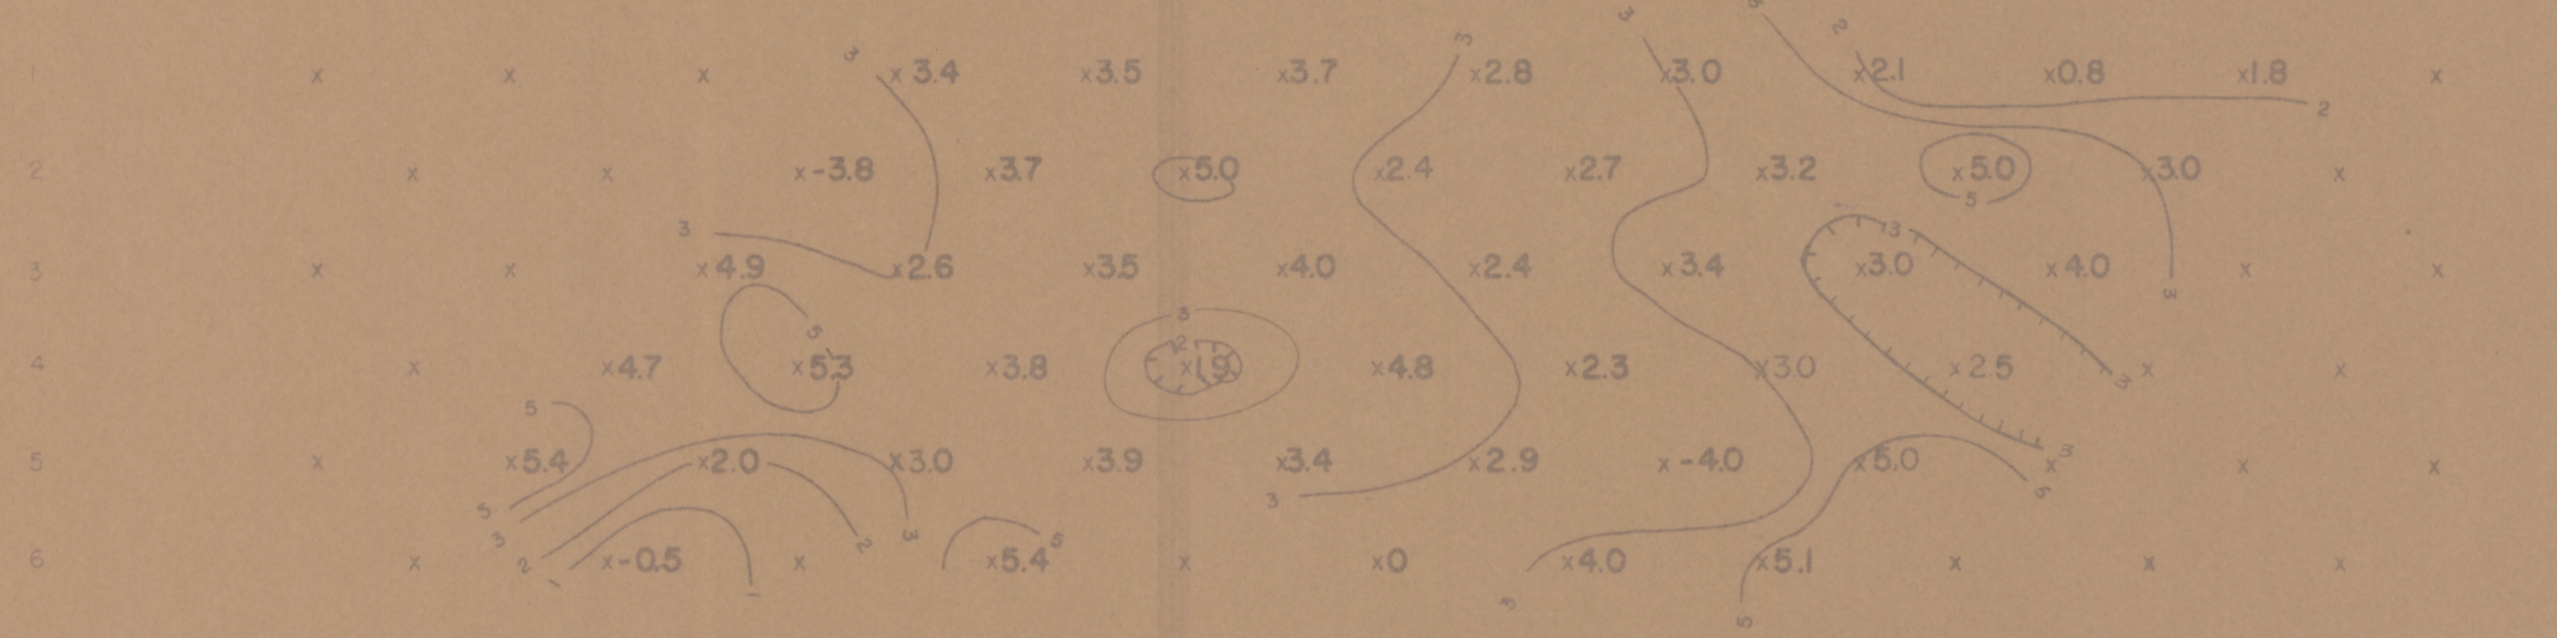

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES: 0.05 & 3.0 C.P.S.


NORTH STAR MINE AREA
PINAL COUNTY, ARIZ.

SECTIONAL DATA SHEET
LINE NO. 2

INDUCED POLARIZATION TRAVERSE

HEINRICH'S GEOEXPLORATION COMPANY
SCALE: 1" = 1500' DATE: 9-64

FOR
THE MAGMA COPPER CO.

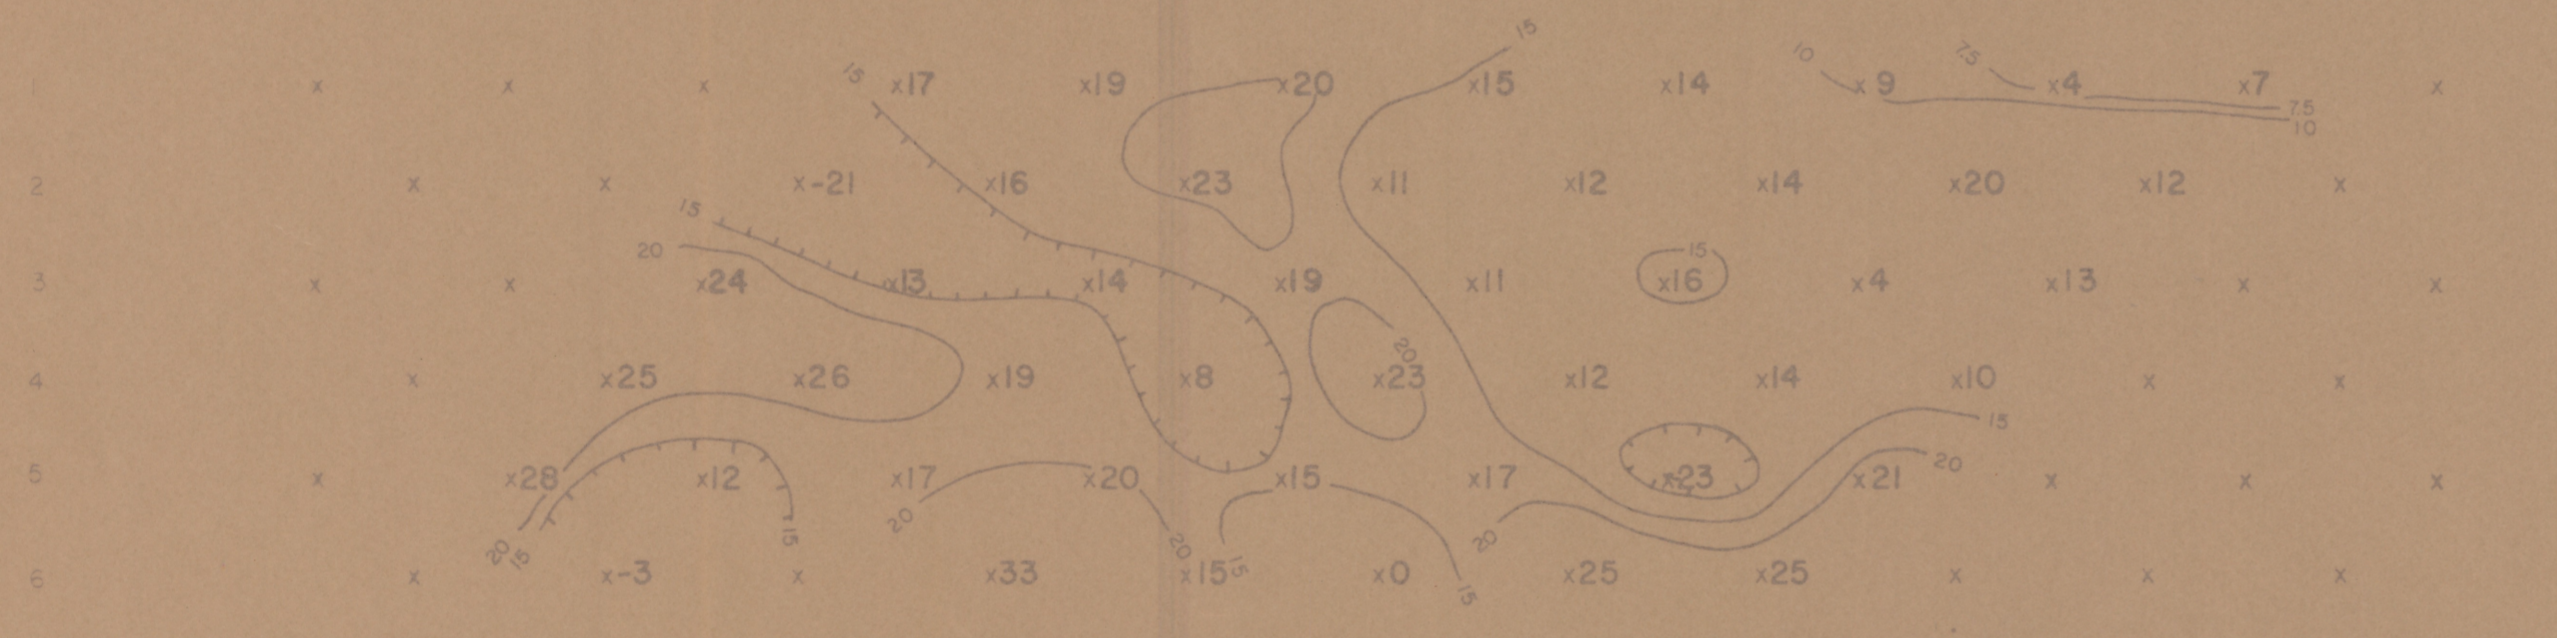

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
(MCF = PFE x 1000)
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL
SURFACE PROFILE
GEOLOGY, ETC.

1500-150-20-207 11/14/64