


LOOKING NORTHERLY


ELECTRODES STATIONS

n INTERVAL BETWEEN SENDER & RECEIVER DIPOLES

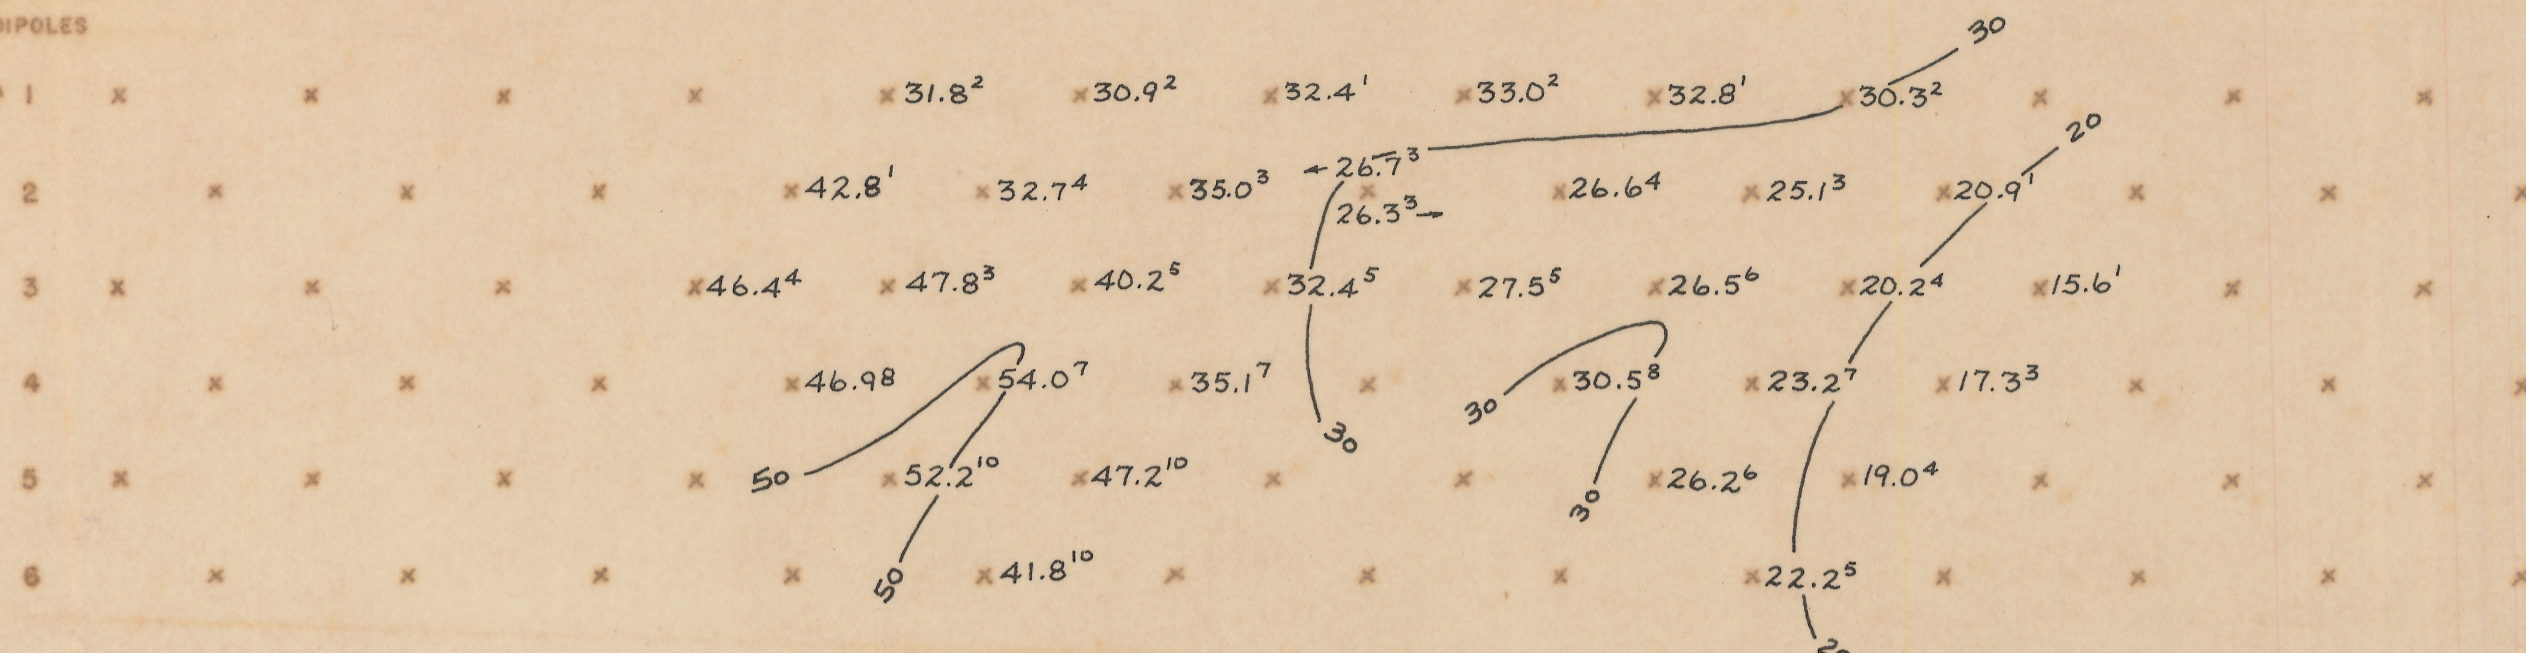


APPARENT RESISTIVITY (ρ_{DC}) IN UNITS OF OHM FEET
 CONTOUR INTERVAL LOGARITHMIC
 SENDER FREQUENCY: 0.05 cps

EXPLANATION

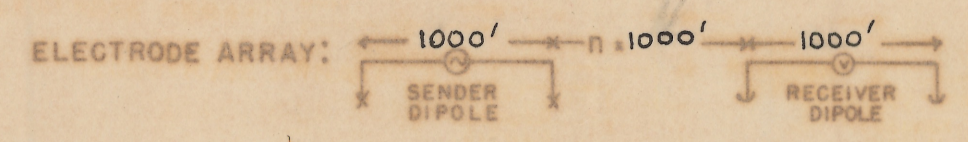


RELATIVE ANOMALY STRENGTH

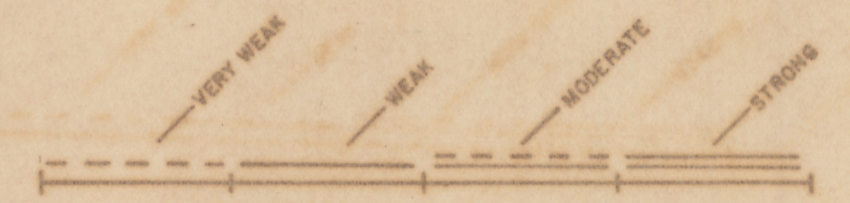


? ←

LINE X 55° S.

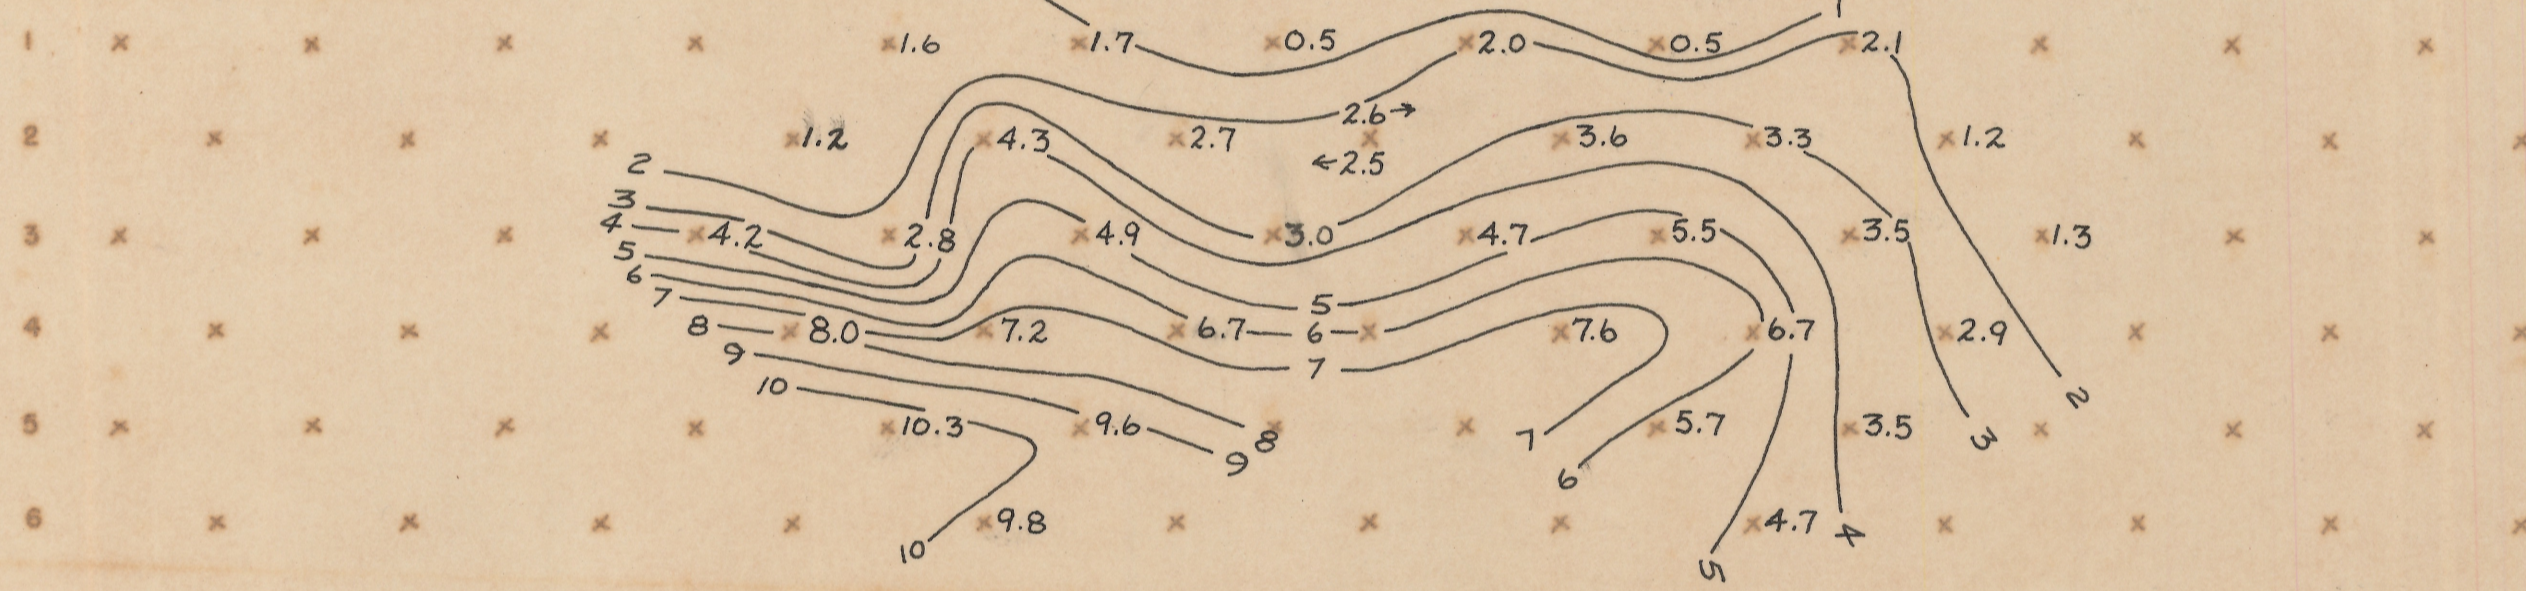

PERCENT FREQUENCY EFFECT (PFE) CONTOUR INTERVAL CONSTANT
 SENDER FREQUENCIES: 0.05 & 3.0 cps

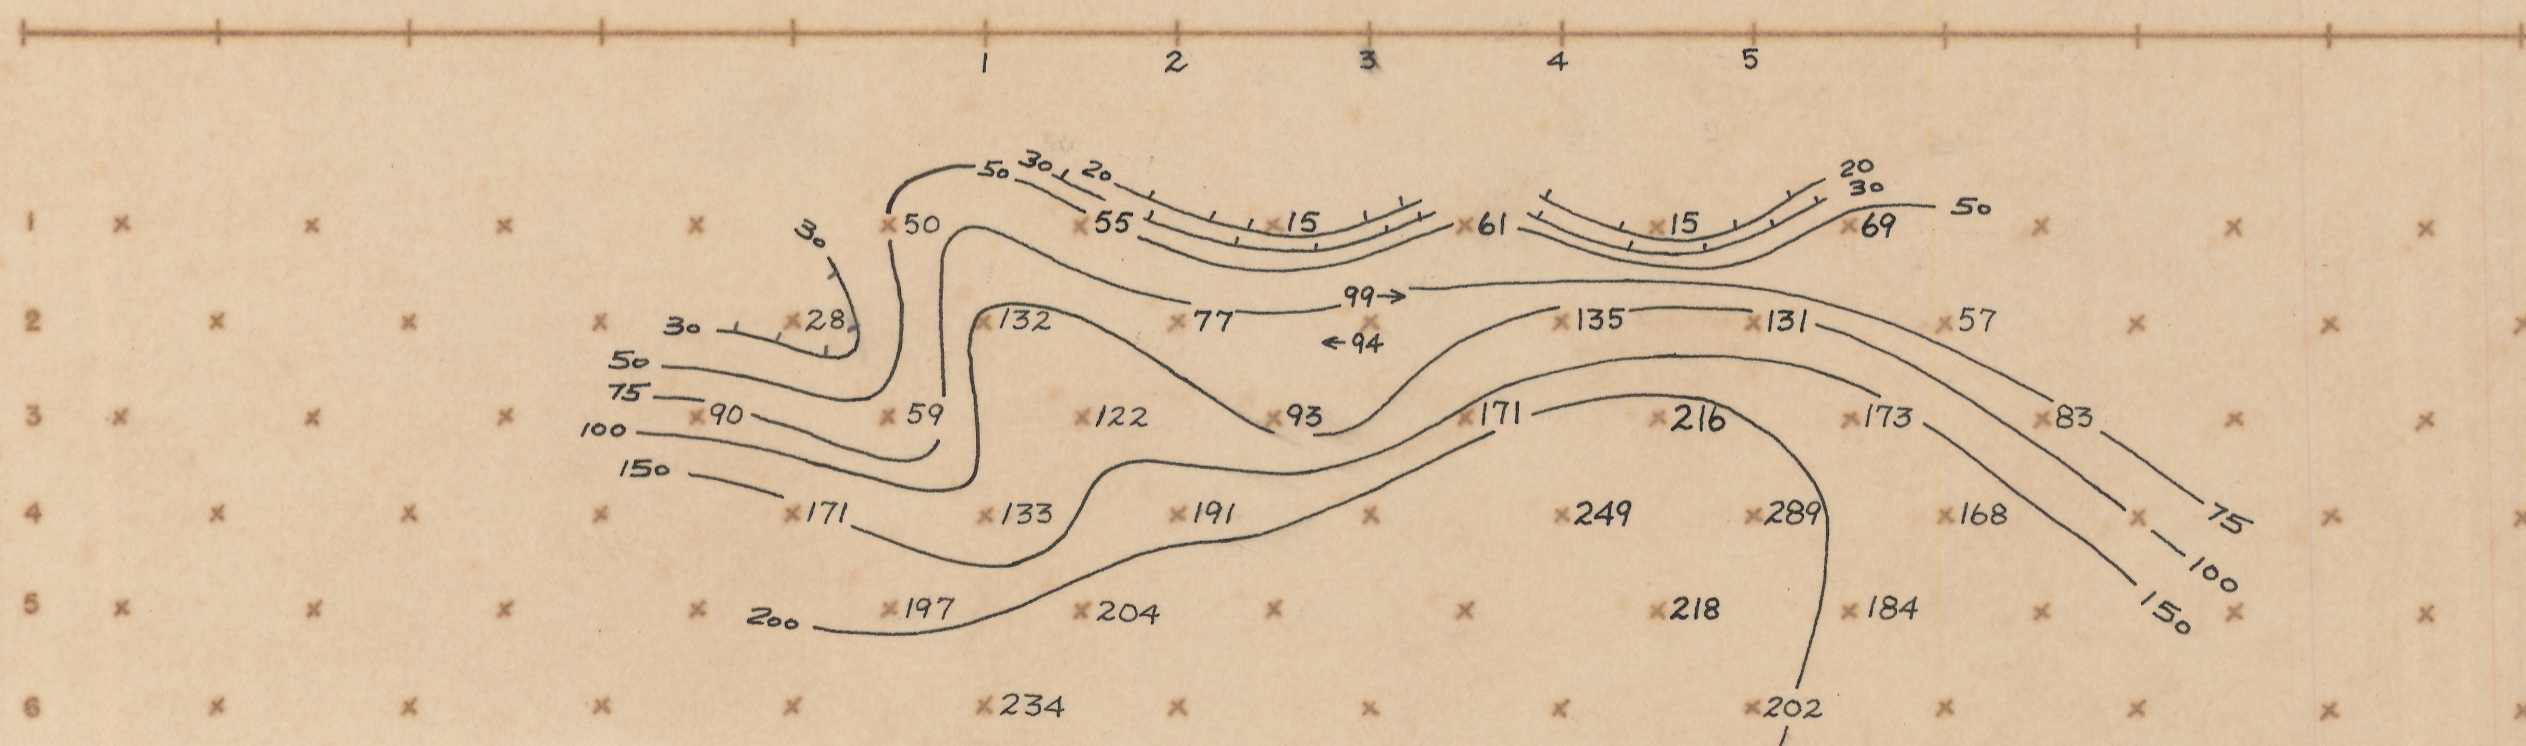

APPARENT "METALLIC CONDUCTION" FACTOR (MCF) $(MCF = \frac{PFE \times 1000}{\rho_{DC}})$
 CONTOUR INTERVAL LOGARITHMIC

← N. 70° W. S. 70° E →

SECTIONAL DATA SHEET
 LINE No. 1-A
 INDUCED POLARIZATION TRAVERSE
 DEMETRIE WASH PROJECT
 HEINRICHS GEOEXPLORATION COMPANY
 SCALE: 1" = 1000' DATE: APRIL 1964
 FOR
 THE SUPERIOR OIL COMPANY
 MINERALS DIVISION