

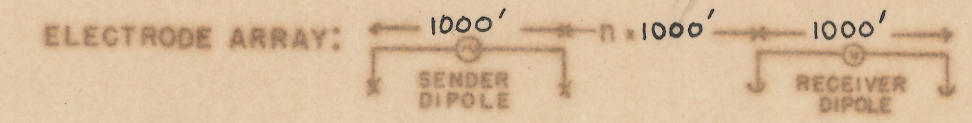


APPARENT RESISTIVITY ( $\rho_{DC}$ )  
IN UNITS OF OHM FEET  
CONTOUR INTERVAL LOGARITHMIC  
SENDER FREQUENCY: 0.05 cps


EXPLANATION

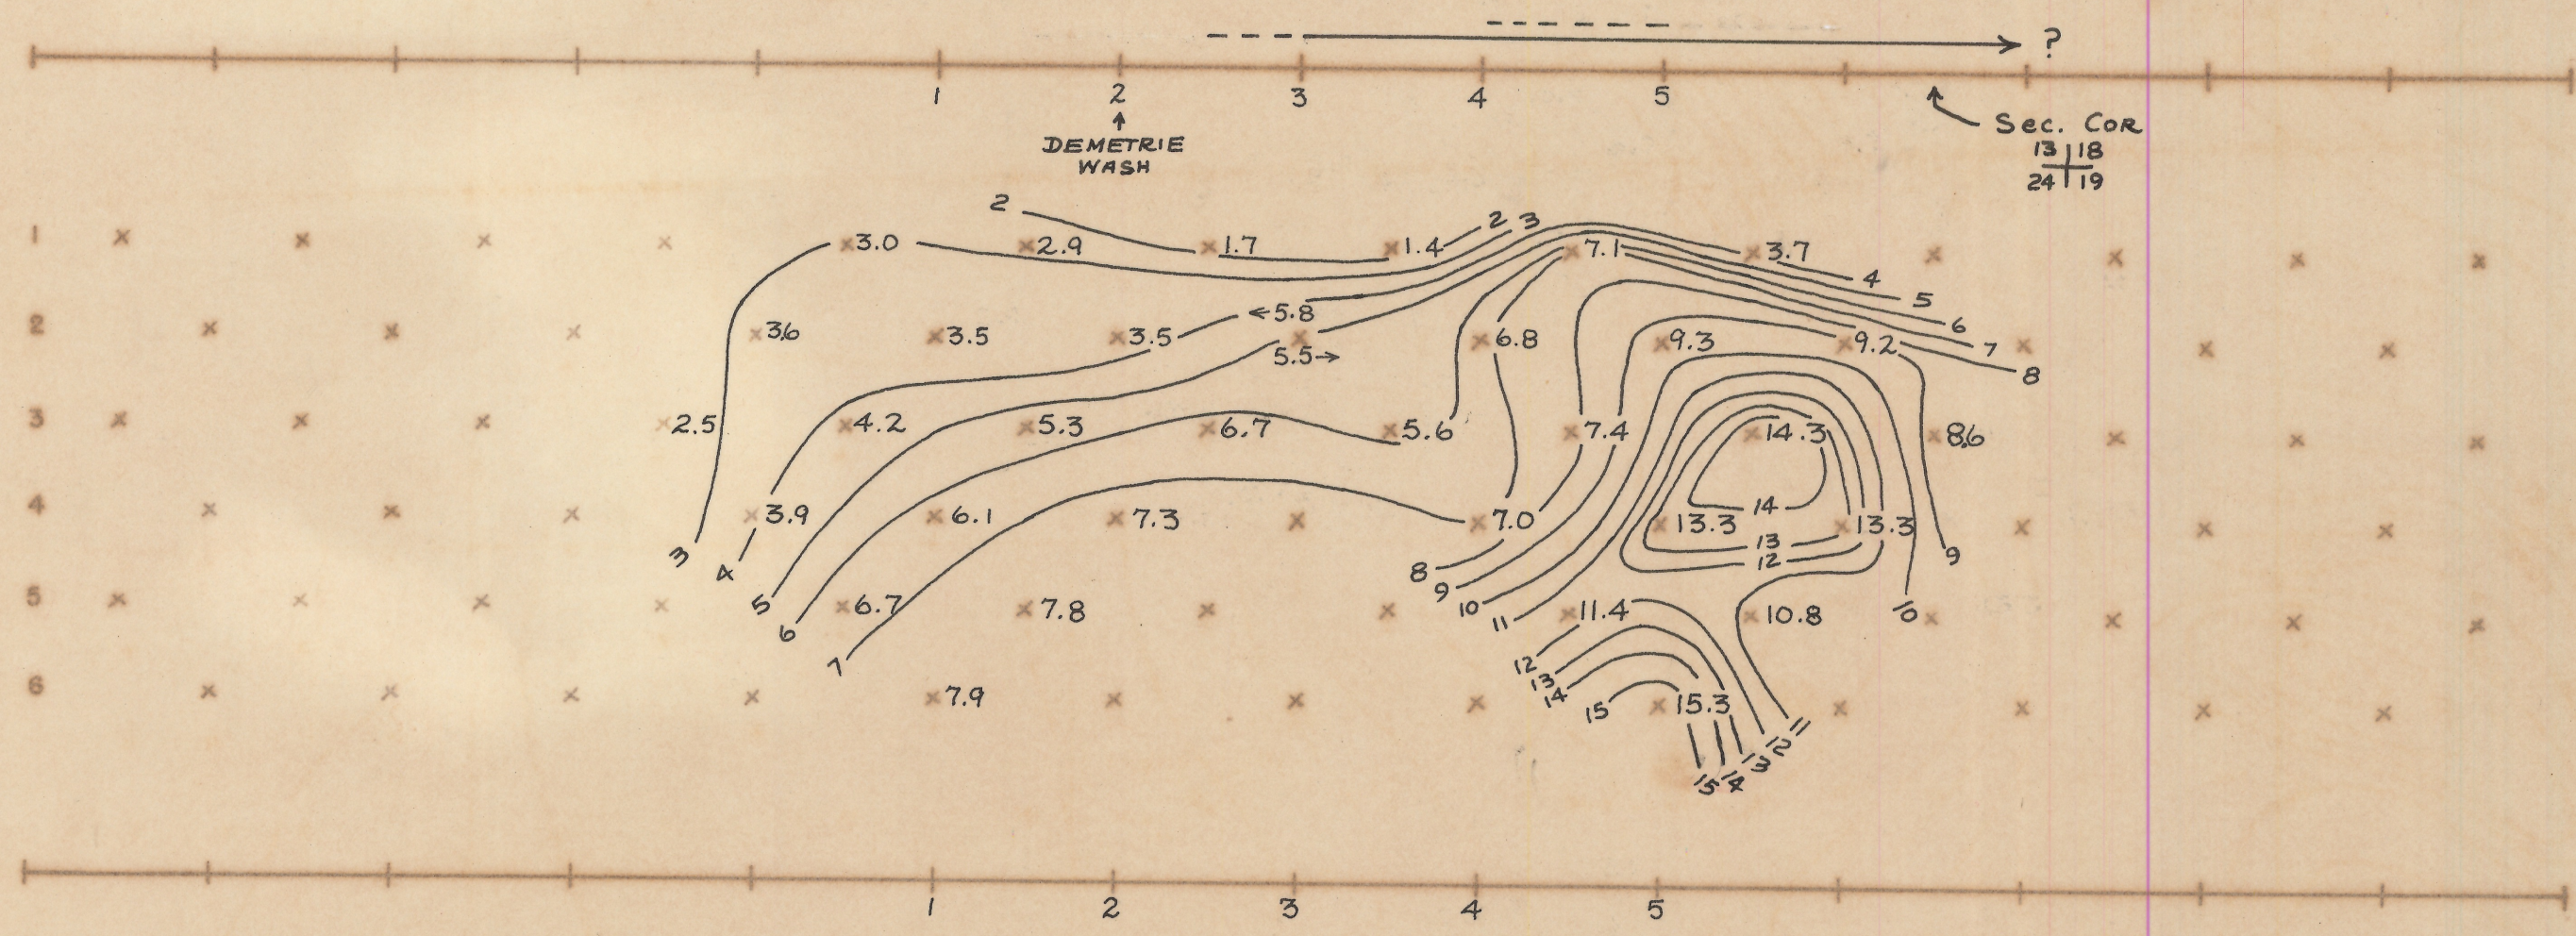

RELATIVE ANOMALY STRENGTH

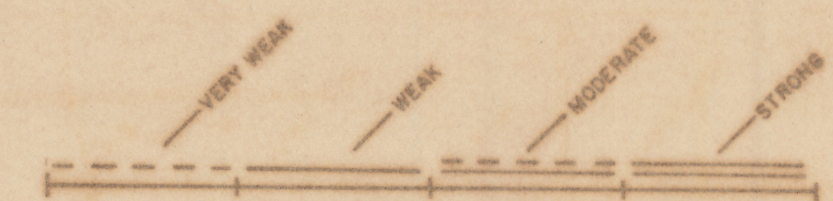

PERCENT FREQUENCY EFFECT (PFE)  
CONTOUR INTERVAL CONSTANT  
SENDER FREQUENCIES: 0.05 & 3.0 cps

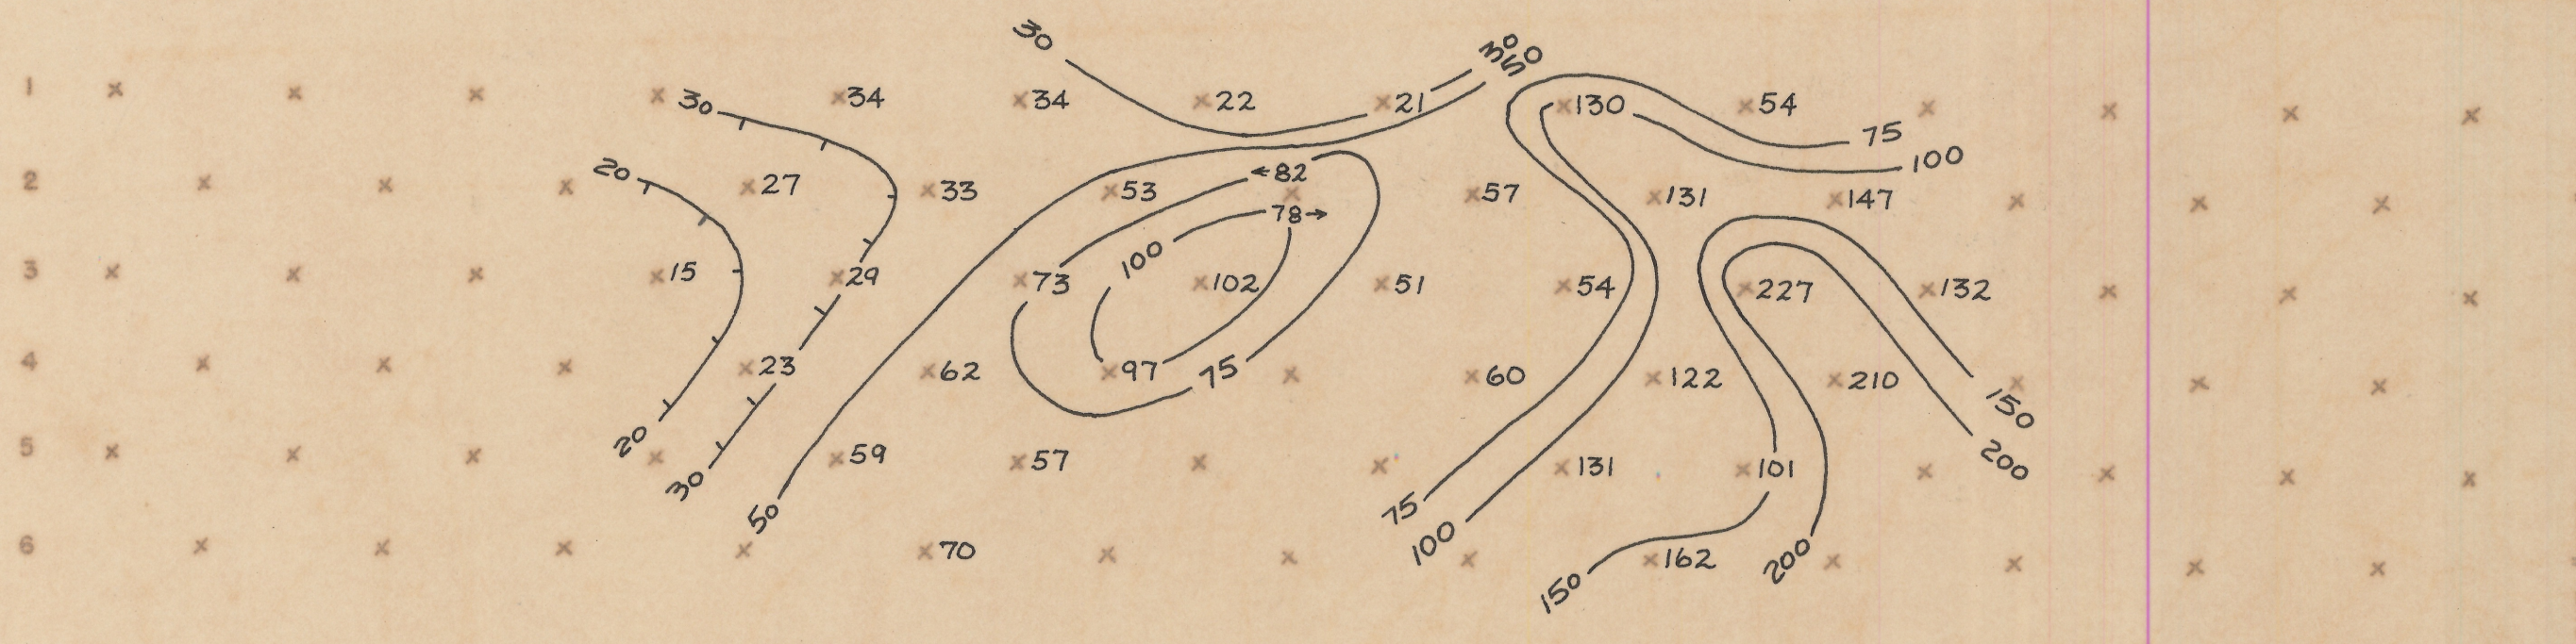

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)  
 $MCF = \frac{PFE \times 1000}{\rho_{DC}}$   
CONTOUR INTERVAL LOGARITHMIC

← S. 65°W. LOOKING NORTHERLY N. 65°E. →

SECTIONAL DATA SHEET  
LINE No. 2-A  
INDUCED POLARIZATION TRAVERSE  
DEMETRIE WASH PROJECT  
HEINRICHS GEOEXPLORATION COMPANY  
SCALE: 1" = 1000' DATE: APRIL 1964  
FOR  
THE SUPERIOR OIL COMPANY  
MINERALS DIVISION